


PS行星回转齿轮箱

PS Planetary Slewing Gearbox

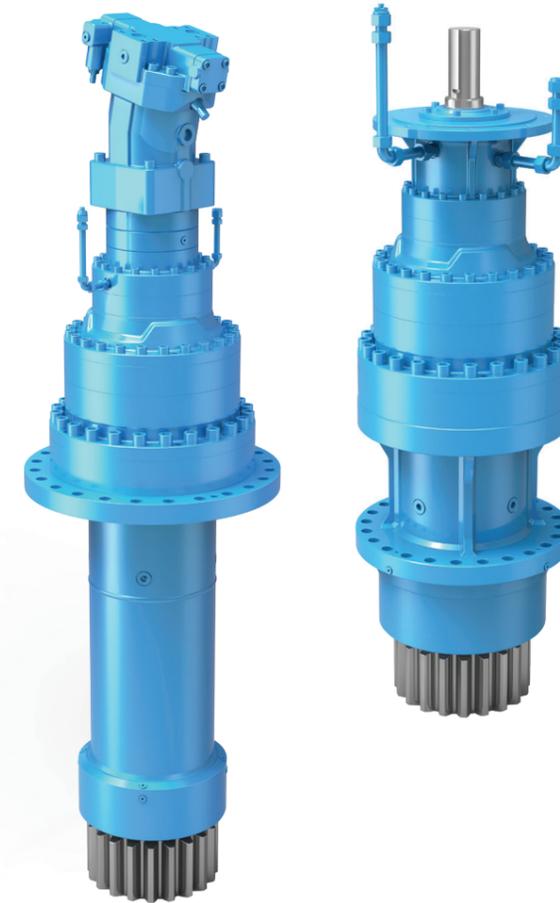

PS行星回
转齿轮箱

PS Planetary
Slewing Gearbox

Edit date 11/2025
Selection Sample C05.0026





控制器/驱动器/马达/ 齿轮马达/齿轮箱 Controller/ Drive/ Motor/ Gearmotor/ Gearbox

PS行星回转齿轮箱

PS Planetary Slewing Gearbox



- ◆ PS行星回转齿轮箱是回转机构的理想驱动装置。结构紧凑，性能良好。在繁重工作条件和恶劣环境下能提供卓越的品质和性能，并经过过考验。
- ◆ 太阳轮、行星轮均采用优质合金钢渗碳淬火处理，内齿圈采用优质合金钢表面硬化处理，所有齿轮均磨齿加工。行星架和内齿圈连接法兰均采用球墨铸铁材料，且均通过计算机模拟变形和应力分析等优化设计。
- ◆ 所有轴承采用知名品牌，轴承系统承载能力高，安全裕度大。
- ◆ 输入、输出采用径向骨架油封，输出标准结构为双油封设计，在复杂和恶劣的工作环境中具有更高的安全性和更长的使用寿命。
- ◆ 高度的模块化设计，批量生产更加经济，有效提高供货速度。
- ◆ 两级、三级和四级行星齿轮传动设计，速比覆盖范围广。
- ◆ 运转噪音低，传动效率高，使用寿命长。
- ◆ 安装简单，维护方便。
- ◆ PS planetary slewing gearbox is the ideal drive for the rotation mechanism. Compact structure, good performance. Boneng PS planetary slewing gearbox have proved highly successful under extreme bad operating conditions.
- ◆ Sun and planet wheels material is excellent alloy steel and processed by carburization and quenching. Internal gear wheel material is excellent alloy steel and processed by hardening. All gears grinding. The connection flange of planet carrier and internal gear wheel are made of ductile graphite iron, and are optimized by computer simulation and stress analysis.
- ◆ All bearings are from famous brand. The bearings have high loading support and safety.
- ◆ The input and output are protected with radial skeleton seals, the output standard structure is designed for double seals, in complex and harsh working environment with higher safety and longer service life.
- ◆ High modular design. Volume production is more economic and speeds up the delivery period.
- ◆ 2 stage, 3 stage and 4 stage design and wide range of ratio.
- ◆ Low noise, high efficiency and long operation life.
- ◆ Easy mounting and maintenance.

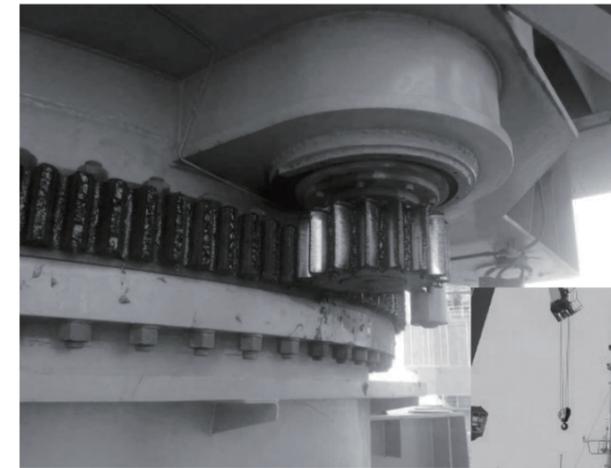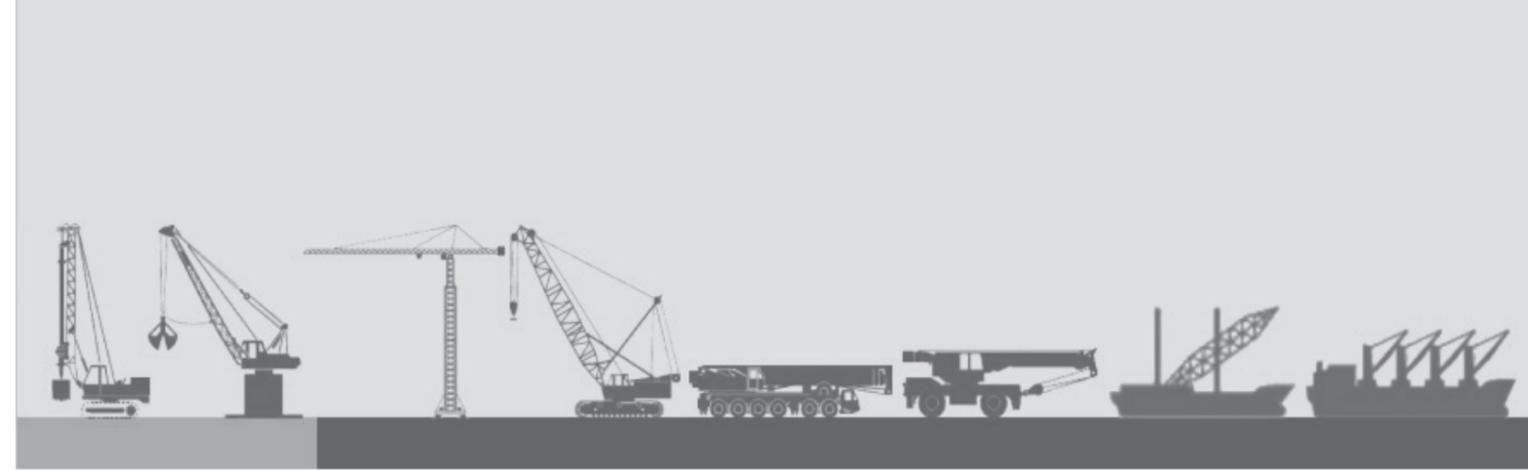

港口起重机和船厂
船舶和甲板起重机
海上平台起重机
随车吊和汽车吊
拖车和抢险车
旋挖钻和履带式起重机
建筑起重机和输送设备
集装箱龙门吊
装载和转载起重机
风力发电的偏航变桨机构

Harbour and dockyard cranes
Shipboard and deck cranes
Offshore cranes
Mobile cranes
Trailers and rescue vehicles
Rotary drilling and crawling cranes
Construction cranes and conveyors
Container gantries
Loading and transshipment cranes
Wind power yaw pitching mechanism

博能公司全系列产品采用独创的模块化设计，零部件通用最大化，具有量产优势，标准零配件成本低，供货周期短，整个产品系列均采用高制造标准，保证了极好的承载能力和工作可靠性。

All series products of Boneng use the original modular design, parts general maximization, it has advantage of mass production, the standard parts of low costs, short delivery cycle. The whole product series adopt high manufacturing standards to ensure the excellent carrying capacity and working reliability.

注意事项!必须严格遵守以下各项!

- ◆ 样本中的结构示意图、外形图及其他附图只属范例,无严格比例要求。(未注尺寸单位均为mm)。
- ◆ 所注重量仅为平均值,并不具有约束力。
- ◆ 为防止意外事故发生,所有旋转部件均按照使用者所在国家和地区的安全规范由购置方加罩保护。
- ◆ 试车之前必须认真阅读使用说明书。
- ◆ 齿轮箱在供货时已处于准运行状态,运行前需加注润滑油。
- ◆ 本样本中注油量只作为参考值,实际注油量应以油尺上的标记为准。
- ◆ 润滑油粘度应按齿轮箱使用工况及使用环境温度选取。
- ◆ 只能采用国际知名品牌的润滑油。


产品功能标识



Note: You must conform to the following instructions

- ◆ The structure scheme, appearance diagram and other attached diagrams in sample are examples, there is no strict proportion requirement. (The unmarked dimension units are mm).
- ◆ We can only refer to the marked weight in the manual.
- ◆ To prevent accidents, all the rotation parts should be added with protective covers according to local safety regulations and laws.
- ◆ Before testing, users should read instruction manual carefully.
- ◆ Gearbox has been tested before delivered, users should add lubrication oil before running.
- ◆ We can only refer to the marked oil in the manual. Actual oil filling level should be the same with the mark on oil immersion lens.
- ◆ Lubrication oil viscosity should be selected according to working conditions and the temperature of local environment.
- ◆ Users can only use high quality lubrication oil.

Product Function Mark



目录


01.结构简图	01
02.型号表示	02
03.输入方式	02
04.产品说明	03
05.选型说明	05
06.传动能力	08
07.外形尺寸 安装尺寸	09
08.安装要求	11
09.润滑说明	12
10.附件	12
11.轴端中心孔	13
12.平键与键槽尺寸	14
13.设计参数表	15

Contents

01.Design and Construction	01
02.Type description	02
03.Input modes	02
04.Product explanation	03
05.Type selection explanation	05
06.Transmission capacity	08
07.Outline dimensions	09
08.Mounting method	11
09.Lubrication	12
10.Accessories	12
11.End shaft central hole	13
12.SKey and Keyway size	14
13.Parameter table	15

1 结构简图

1 Design and Construction

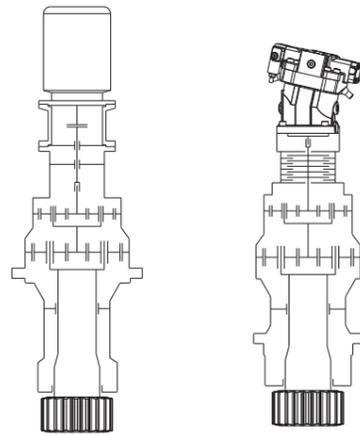


二级行星传动齿轮箱

额定输出扭矩:11000至15000Nm
公称减速比14至29
电动马达/液压马达驱动
法兰A/法兰B安装
输入与输出旋转方向相同

2 stage planetary gearbox

Output torques: 11000 to 15000 Nm
Ratio from 14 to 29
Electric motor/ hydraulic motor drive
Flange A/flange B installation
Input and output in same direction of rotation

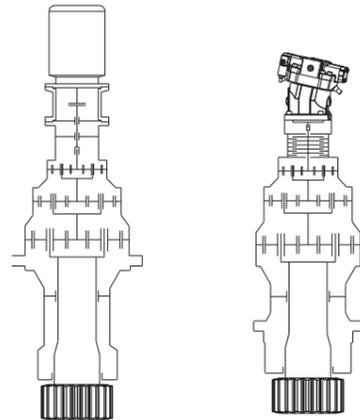


三级行星传动齿轮箱

额定输出扭矩:25000至230000Nm
公称减速比46至142
电动马达/液压马达驱动
法兰A/法兰B安装
输入与输出旋转方向相同

3 stage planetary gearbox

Output torques: 25000 to 230000 Nm
Ratio from 46 to 142
Electric motor/ hydraulic motor drive
Flange A/flange B installation
Input and output in same direction of rotation

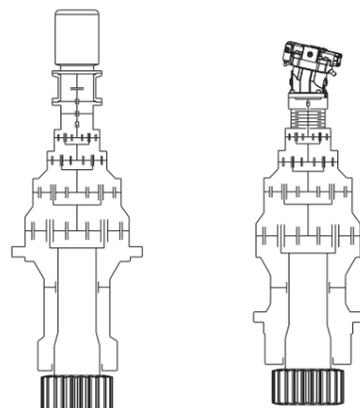

四级行星传动齿轮箱

额定输出扭矩:45000至590000Nm
公称减速比171至947
电动马达/液压马达驱动
法兰A/法兰B安装
输入与输出旋转方向相同

4 stage planetary gearbox

Output torques: 45000 to 590000 Nm
Ratio from 171 to 947
Electric motor/ hydraulic motor drive
Flange A/flange B installation
Input and output in same direction of rotation

备注:各传动级的机械效率为98%,输出轴轴承及密封圈的机械效率为99%。

例如:三级行星传动齿轮箱机构的机械效率为 $\eta_{总}=0.98 \times 0.98 \times 0.98 \times 0.99=0.93$


Remark: Mechanical efficiency of each stage is 98%, output shaft and the seal rings mechanical efficiency is 99%.

For example: the total mechanical efficiency for 3 stage planetary gearbox $\eta_{总}=0.98 \times 0.98 \times 0.98 \times 0.99=0.93$

2 型号表示


2 Type Description

系列名 PS
行星齿轮传动级数 2级/3级/4级传动
机座号
法兰安装形式 法兰A 法兰B
公称减速比
输入部分 H-液压马达输入 轴(电机)输入时不标
附件和特殊要求

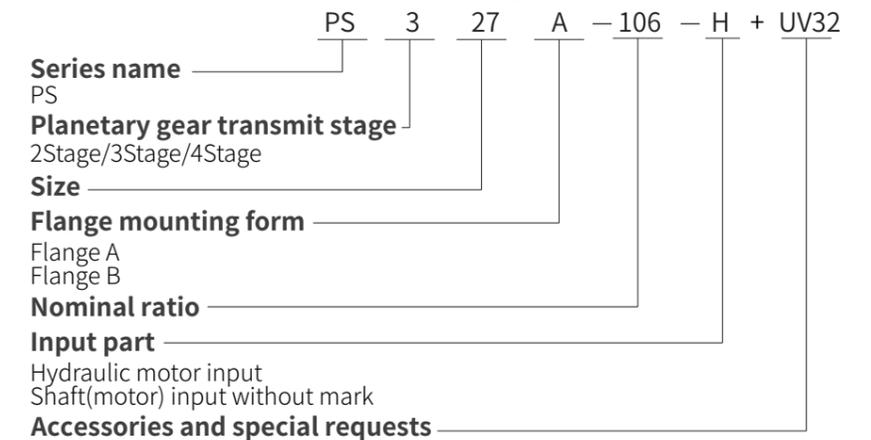


3 输入方式

3 Input Modes

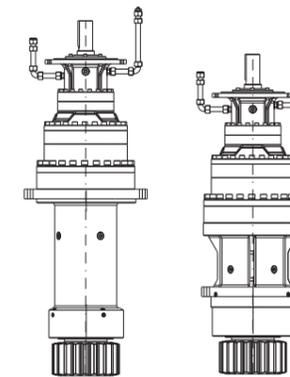

轴(电机)输入, 竖直安装

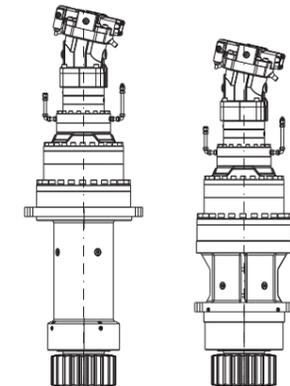

液压马达输入, 竖直安装

产品配备电动机、液压马达两种模块化输入系统。

1) 电机输入时, 根据客户使用要求, 电机和齿轮箱输入轴之间可适配极限力矩限制器/联轴器和制动器。当回转部分的外阻力矩超过传动系统的许用扭矩时, 极限力矩限制联轴器打滑, 从而保护传动系统零部件不受损坏; 制动器用于工作过程中回转机构的减速或制动, 可采用液压、气动等制动系统。

2) 液压马达输入时, 输入轴为DIN 5480规格的花键轴, 带具有液压松脱—弹簧制动装置的液压多片式驻车制动系统。该制动安全装置是独立的活塞或制动器, 其释放压力最小为15bar, 最大为300bar, 系统残留压力小于0.5 bar, 压力管道接口为M12x1.5。

PS with two modular input systems: electric motor input and hydraulic motor input.

(1) When electric motor is input, according to customer's requirements, between motor and gearbox input shaft can fit with ultimate torque limiters/ couplings and operating brake. When the external resistance torque of the slewing section exceeds the permissible torque of the transmission system, the ultimate torque limits the coupling to slip, thus protecting the drive system components from damaging. The working brake is used for deceleration or braking of the slewing mechanism during operation. It can use hydraulic, pneumatic and other braking systems.

(2) When hydraulic motor is input, the input shaft is a DIN 5480 spline shaft, equipped with the hydraulically released spring-action multi-disc brake parking system. This brake safety device is a self contained piston and brake with a minimum release pressure of 15 bar, the maximum pressure is 300 bar. System residual pressure is less than 0.5 bar. The pressure pipe interface is M12x1.5.

4 产品说明

4.1 偏心距调整:

为了准确地调整输出轴齿轮与回转支承齿圈之间的齿隙,相对于输出齿轮轴与固定法兰,驱动轴可以是偏心的。其中法兰A安装相应安装孔分布圆和止口偏心距 $e_1=2.5\text{mm}$, 法兰B安装相应安装孔分布圆和止口偏心距 $e_2=1.5\text{mm}$, 且相应安装法兰有偏心高点标记, 以便于识别。如图1、图2。

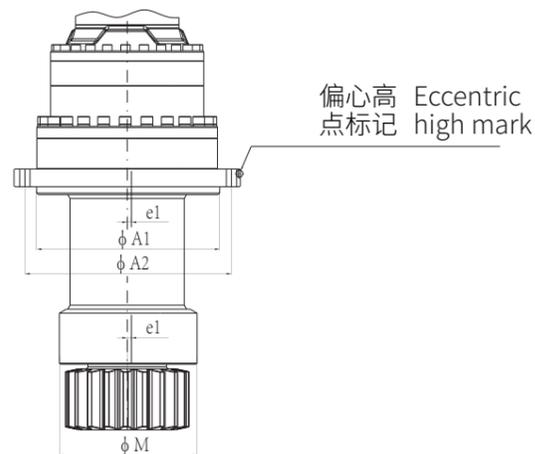


图1 Figure1

4 Product Description

4.1 Eccentricity adjustment:

In order to adjust the gap between the output shaft gear and the slewing ring gear accurately, the drive shaft may be eccentric with respect to the output gear shaft and the fixed flange. Flange A installation corresponding mounting hole distribution circle and the spigot eccentricity is $e_1=2.5\text{mm}$, flange B installation corresponding mounting hole distribution circle and the spigot eccentricity is $e_2=1.5\text{mm}$. And the corresponding mounting flange has eccentric high markings for easy identification. As shown in figure 1, figure 2.


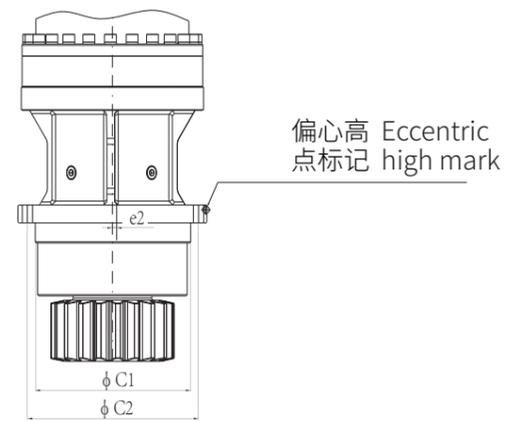


图2 Figure2

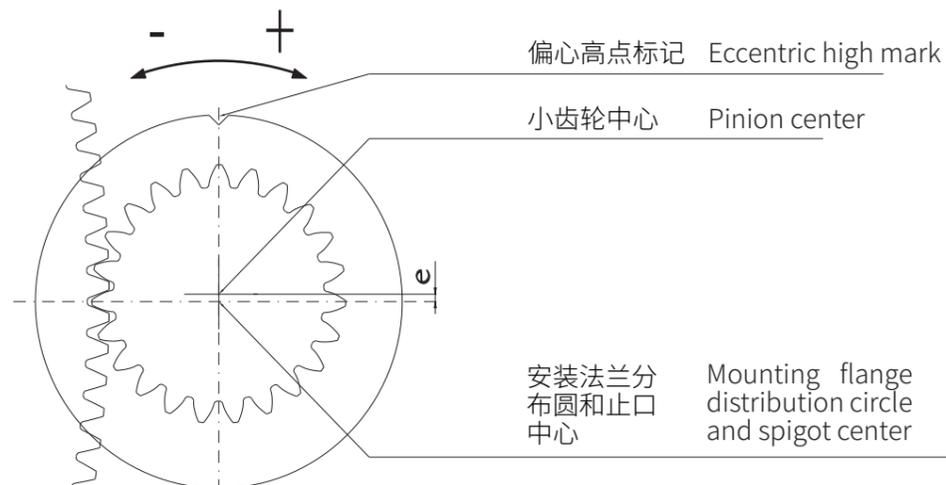

4.2 输出法兰回转轴长度和小齿轮

4.2.1 输出法兰A回转轴长度可灵活设计,以满足客户回转支承安装尺寸;

4.2.2 输出端小齿轮参数可灵活设计,具体以客户提供的参数为准;

4.2.3 小齿轮和回转输出轴连接方式: DIN5480花键、平键和一体式设计。

4.3 齿轮箱安装方位说明

齿轮箱默认安装方位为垂直方向且小齿轮朝下,若是其余安装位置请事先声明!

4.2 Output flange slewing shaft length and pinion

4.2.1 Output flange A slewing shaft length can be flexibly designed to meet the mounting dimensions of slewing support;

4.2.2 The output pinion parameters can be designed flexibly, depending on the parameters provided by the customer;

4.2.3 Pinion and slewing output shaft connection methods: DIN 5480 splines, parallel keys and one-piece design.

4.3 Gearbox mounting position instructions

The default mounting position of the gearbox is vertical and the pinion is facing down, if using other mounting positions please declare in advance.

5 选型说明

5.1 使用说明

PS行星齿轮箱额定动态输出扭矩 T_{dyn max}按欧洲起重机械联合会标准FEM (FEM-Federation Europeenne de la Manutention)第三版第一章,驱动机构等级M5,负载分组L2 (P=常数, =15rpm),工况等级T5分组,工作环境温度+20°C设计。客户在计算输出扭矩时,注意回转机构加速、减速、风力及倾斜度。回转齿轮箱输出齿轮的最大扭矩的确定只能根据对整套设备的精确了解。如果回转机构分级为其它工作级别,则其所需输出扭矩必须采用系数K进行修正。

S_{MF}=摩擦力产生的最大惯性力矩
 S_{MW8}=80N/m²风力产生的最大扭矩
 S_{MS}=倾斜产生的最大扭矩
 S_{MA}=加速产生的最大扭矩
 S_{MW25}=250N/m²风力产生的最大扭矩
 Y_m=机械组参数的负载放大系数(见FEM-34)

无风力影响的正常运行

$$S_{Mmax I} = (\bar{S}_{MF} + \bar{S}_{MA}) Y_m$$

有风力影响的正常运行

$$S_{Mmax II} = (\bar{S}_{MF} + \bar{S}_{MA} + \bar{S}_{MW8})$$

$$S_{Mmax II} = (\bar{S}_{MF} + \bar{S}_{MW25}) Y_m$$

有风力影响和倾斜角度的正常运行

$$S_{Mmax II} = (\bar{S}_{MW8} + \bar{S}_{MS}) Y_m$$

T₂:输出扭矩 (N·m)

T_{2K}:修正后的输出扭矩 (N·m)

K:工况系数(设备分组工况系数)

$$T_{2K} = T_2 * K$$

齿轮箱选型时T_{2K}必须<T_{dyn max} (设计扭矩或样本扭矩)

5 Type selection explanations

5.1 Operation instruction

PS planetary gearbox rated dynamic output torques T_{dyn max} are based on FEM standards section 1, 3rd edition (FEM-Federation Europeenne de la Manutention). Drive unit group M5, load conditions L2(P=constant, =15rpm), running time classification T5. Ambient temperature +20°C. When the customer calculates the output torques, pay attention to the slewing mechanism accelerates, decelerates, winds and inclines. The maximum torque of the slewing gearbox output gear can only be determined by the exact understanding of the equipment. If the slewing mechanism is classified as other working grades, the output torques must be multiplied by the factor K.

S_{MF}=the maximum moment of inertia produced by friction
 S_{MW8}=the maximum torque generated by 80N/m² wind
 S_{MS}=the maximum torque generated by the slope
 S_{MA}=the maximum torque generated by the accelerate
 S_{MW25}=the maximum torque generated by 250N/m² wind
 Y_m=Load amplification factor for mechanical group parameters (seeFEM-34)

No wind impact of the normal operation

$$S_{Mmax I} = (\bar{S}_{MF} + \bar{S}_{MA}) Y_m$$

With wind impact of the normal operation

$$S_{Mmax II} = (\bar{S}_{MF} + \bar{S}_{MA} + \bar{S}_{MW8})$$

$$S_{Mmax II} = (\bar{S}_{MF} + \bar{S}_{MW25}) Y_m$$

With wind impact and slope of the normal operation

$$S_{Mmax II} = (\bar{S}_{MW8} + \bar{S}_{MS}) Y_m$$

T₂: Output torque

T_{2K}: Corrected output torque

K: Application factor (equipment grouping factor)

T_{2K} must ≤ T_{dyn max} (design torque or sample torque)

5.2 工况系数(机构利用等级和载荷状态分级)

5.2 Application factor (running time classification and load conditions)

Running time classification 工况等级	运行时间级别	Symbol	T2	T3	T4	T5	T6	T7	T8
	一年内, 日平均工作时间(小时)	Mean running time per day in hours, related to one year		0.25—0.5	0.5—1	1—2	2—4	4—8	8—16
使用寿命(小时)	Life in hours 8 years, 200 days/year		400—800	800—1600	1600—3200	3200—6300	6300—12500	12500—25000	25000—50000
Load conditions 负载情况	集合系数	Collective coefficient Km	设备分组工况系数K Drive unit class Application factor K						
L1		—0.125	M1 0.90	M2 0.90	M3 0.90	M4 0.92	M5 0.92	M6 1.1	M7 1.36
L2		0.125—0.250	M2 0.90	M3 0.92	M4 0.96	M5 1	M6 1.07	M7 1.3	M8 1.6
L3		0.250—0.500	M3 1.05	M4 1.09	M5 1.17	M6 1.23	M7 1.28	M8 1.53	M8 1.89
L4		0.500—1.000	M4 1.32	M5 1.36	M6 1.46	M7 1.53	M8 1.58	M8 1.8	M8 2.22

5.3 起重机械典型载荷谱(图3)

5.3 Typical load spectrum for crane (figure 3)

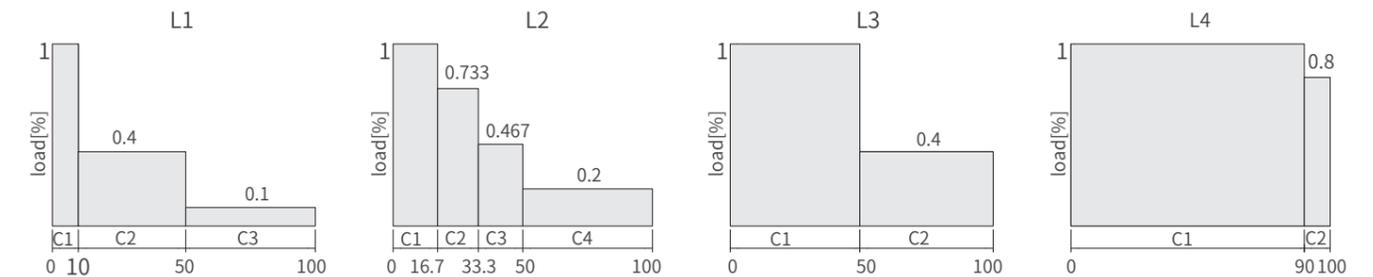


图3 起重机械典型载荷谱

Figure 3 Crane load spectrum

5.4 设备分级指导 参见FEM标准第三版第一章,表T.2.1.3.5

5.4 Classification guidance According FEM section 1, 3rd edition,table T.2.1.3.5

起重机类型 Type of crane(name)	工作元件 Working accessories	驱动机构类型 Type of mechanism				
		起升 Hoisting	回转 Slewing	变幅 Luffing	小车运行 Traverse	大车运行 Travel
安装用起重机 Erection crane		M2-M3	M2-M3	M1-M2	M1-M2	M2-M3
桥式起重机 Bridge crane	吊钩 Hook	M5-M6	M4	-	M4-M5	M5-M6
桥式起重机 Bridge crane	抓斗或磁铁 Grab or magnet	M7-M8	M6	-	M6-M7	M7-M8
车间用起重机 Workshop crane	抓斗或磁铁 Grab or magnet	M6	M4	-	M4	M5
天车, 旁锤起重机, 废钢场起重机 Crane, Ram crane, Scrap mill crane	吊钩或磁铁 Hook or magnet	M8	M6	-	M6-M7	M7-M8
卸料桥, 集装箱用门式起重机 Unloading bridge, Container gantry crane	吊钩 Hook	M6-M7	M5-M6	M3-M4	M6-M7	M4-M5
其它门式起重机(带小车和/或转台) Other gantry crane(with crab and/or slewing jib crane)	抓斗或磁铁 Grab or magnet	M4-M5	M4-M5	-	M4-M5	M4-M5
卸料桥, 集装箱用门式起重机(带小车和/或转台) Unloading bridge, Container gantry crane (with crab and/or slewing jib crane)	吊钩 Hook	M8	M5-M6	M3-M4	M7-M8	M4-M5
船台起重机船坞起重机, 拆卸用起重机 Shipyard crane, Dock crane, Disassembly crane		M5-M6	M4-M5	M4-M5	M4-M5	M5-M6
港口起重机(可转动, 门式), 浮式起重机, 浮式起重架 Harbor crane(slewing, gantry), floating crane and floating derricks	吊钩 Hook	M6-M7	M5-M6	M5-M6	-	M3-M4
港口起重机(可转动, 门式), 浮式起重机, 浮式起重架 Harbor crane(slewing, gantry), floating crane and floating derricks	抓斗或磁铁 Grab or magnet	M7-M8	M6-M7	M6-M7	-	M4-M5
浮式起重机和浮式起重架, 用于非常高的负荷(一般在100t以上) Floating crane and floating derrick for very heavy loads(usually greater than 100t)		M3-M4	M3-M4	M3-M4	-	-
甲板起重机 Deck crane	吊钩 Hook	M4	M3-M4	M3-M4	M2	M3
甲板起重机 Deck crane	抓斗或磁铁 Grab or magnet	M5-M6	M3-M4	M3-M4	M4-M5	M3-M4
塔式起重机用于建筑工地 Tower crane for construction site		M4	M5	M4	M3	M3
门式塔架 Gantry tower		M2-M3	M1-M2	M1-M2	-	-
铁路起重机, 批准用于铁路维修 Railway crane, approved for railway maintenance		M3-M4	M2-M3	M2-M3	-	-
车辆起重机 Mobile crane	吊钩 Hook	M3-M4	M3-M4	M2-M3	-	-

备注: 仅列出了回转机构的一些典型范围以供参考

Note: Above are only some typical applications for slewing mechanism

6 传动能力

6 Transmission capacity

公称速比 Nominal ratio	精确速比 Exact ratio	型号 Type PS	20	22	24	25	26	27	29	31	32	33	34	36
iN	iex	T动 N·m	11000	19000	25000	33000	45000	61000	91000	150000	230000	290000	370000	590000
		T静 N·m	16500	28500	37500	49500	67500	91500	136500	225000	345000	435000	555000	885000
14	14.11	2级 2 Stage	☆	☆	☆	☆	☆	☆	☆	☆	☆			
16	16.14		☆	☆	☆	☆	☆	☆	☆	☆	☆			
19	19.22		☆	☆	☆	☆	☆	☆	☆	☆	☆			
21	21.45		☆	☆	☆	☆	☆	☆	☆	☆	☆			
24	24.47		☆	☆	☆	☆	☆	☆	☆	☆	☆			
29	28.79		☆	☆	☆	☆	☆	☆	☆	☆	☆			
46	45.97	3级 3 Stage	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆		
53	52.56		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆		
60	60.10		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆		
72	71.57		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆		
80	79.88		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆		
85	85.23		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆		
91	91.13		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆		
106	106.18		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆		
121	121.13		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆		
142	142.49		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆		
171	171.21		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆		
196	195.75		☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
224	223.82	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
267	266.53	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
278	277.59	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
297	297.49	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
317	317.39	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
339	339.39	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
354	354.26	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
378	377.95	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
399	399.23	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
422	421.86	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
451	451.10	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
481	481.27	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
515	514.63	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
537	537.18	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
566	566.14	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
600	599.59	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
632	631.91	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
684	684.02	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
705	705.32	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
805	804.65	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
848	848.02	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	
947	946.54	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	

备注: 未注传动比请垂询


Note: For transmission ratios not listed, please contact us.

8 安装要求

回转齿轮箱须正确地安装在机械支架上。钢结构的安装中心孔必须同心，并且法兰安装面必须与其垂直。在运行时，中心孔和法兰的相对位置不应该受环境和外力影响。支架构件的制造公差和回转减速机的最大允许变形见下表。

8 Mounting Method

The slewing gearbox must be properly mounted on the mechanical support. The mounting center hole of the steel structure must be concentric, and the flange mounting surface must be perpendicular to it. During operation, the relative position of the center hole and the flange should not be affected by the environment and external forces. The manufacturing tolerances of the bracket components and the maximum allowable deformation of the slewing gearbox are shown in the table below.

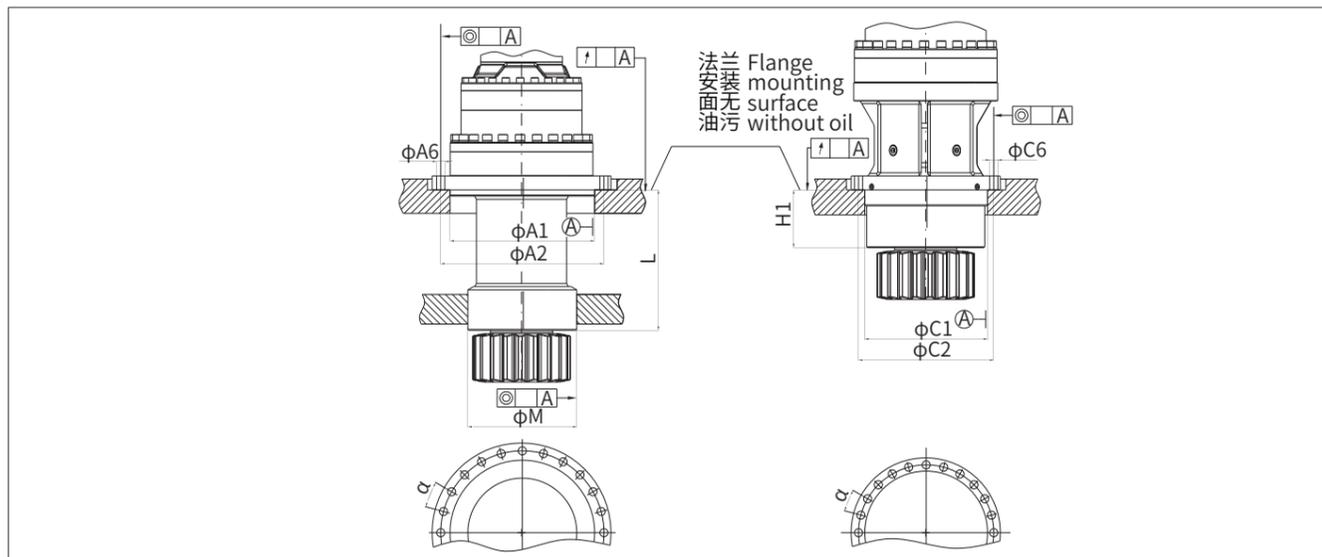

型号 PS Type PS	在外力作用下 The maximum allowable deformation under the external forces								中心孔必须同心, 允许最大加工误差为 The center hole must be concentric, allowing maximum machining error					回转机构的输出轴 The output shaft of the slewing mechanism is not allowed to be distorted by the function of external force and machining error. The maximum allowable deviation of the central axis is					型号 PS Type PS	
	A1C1	A2C2±	z	z	A6	C6	α±	M	输出轴长度 Output shaft length L					输出轴长度 Output shaft length L						
20	0.14	0.2	0.3	0.05	13.5	13.5	15'	0.14	0.05	0.10	0.10	0.10	0.15	0.20	0.25	0.30	0.30	0.40	0.40	20
22	0.16	0.2	0.3	0.07	17.5	17.5	15'	0.16	0.05	0.10	0.10	0.10	0.15	0.20	0.30	0.35	0.35	0.50	0.50	22
24	0.18	0.3	0.5	0.07	17.5	22	10'	0.18	—	0.10	0.10	0.15	0.20	—	0.35	0.35	0.50	0.50	24	
25	0.20	0.3	0.5	0.07	22	22	10'	0.20	—	0.10	0.10	0.15	0.20	—	0.35	0.35	0.50	0.50	25	
26	0.20	0.3	0.5	0.10	22	22	10'	0.20	—	0.10	0.15	0.20	0.25	—	0.40	0.40	0.60	0.60	26	
27	0.23	0.3	0.5	0.10	26	26	10'	0.23	—	0.10	0.15	0.20	0.25	—	0.40	0.50	0.60	0.80	27	
29	0.25	0.3	0.5	0.10	26	33	10'	0.25	—	—	0.15	0.20	0.25	—	—	0.50	0.60	0.80	29	
31	0.25	0.3	0.5	0.10	26	—	10'	0.25	—	—	0.15	0.20	0.25	—	—	0.50	0.60	0.80	31	
32	0.25	0.3	0.5	0.10	33	—	10'	0.25	—	—	0.15	0.20	0.25	—	—	0.50	0.60	0.80	32	
33	0.30	0.3	0.6	0.10	33	—	10'	0.30	—	—	0.20	0.25	0.30	—	—	0.60	0.80	0.80	33	
34	0.30	0.3	0.6	0.10	33	—	10'	0.30	—	—	0.20	0.25	0.30	—	—	0.60	0.80	0.80	34	
36	0.30	0.3	0.6	0.10	39	—	10'	0.30	—	—	0.20	0.25	0.30	—	—	0.60	0.80	0.80	36	

DIN7184规定的形位公差标准定义为：工件的中心线必须位于与基准面中心线偏差t=0.2直径的圆柱体内；工件在围绕基准线转动时，其加工面的偏差不允许超过t=0.2。

The DIN 7184 geometric tolerance standard is defined as: The centerline of the workpiece must be in the cylinder with the base line deviation of t=0.2 diameter. When the workpiece is rotated around the reference line, the tolerance of the machined surface is not allowed to exceed t=0.2.

9 润滑说明

润滑油(重负荷工业齿轮油)粘度牌号选用【VG320(附件代号:UV32)】

9 Lubrication

Lubrication viscosity (heavy industrial gear oil) 【VG320 (code: UV32)】

环境温度 Ambient temperature °C	-20°C~+40°C
粘度牌号 Viscosity	VG320

注：1. 齿轮箱所有轴承采用浸油润滑，除输出轴下端轴承，为脂润滑。
2. 上表中粘度牌号为40°C温度下的ISO-VG粘度。
3. 环境温度低于-10°C必须使用合成油。
4. 为保证产品寿命，实际使用中建议使用合成油。
5. 若环境温度超出上述范围，敬请垂询。


Note: 1. All bearings of gearbox are lubricated by oil, except for the end of the output shaft bearings is grease lubrication.
2. Above table viscosity is only for the temperature under 40°C.
3. Ambient temperature below -10°C must use synthetic oil.
4. To make sure the long using life, we suggest to use synthetic oil.
5. If the ambient temperature is not in the range of table, please contact BONENG.

10 附件 (具体请垂询)

- 齿轮箱
- 液压马达
- 电动机
- 力矩限制器/力矩限制联轴器
- 电机安装法兰
- 阀块
- 制动器
- 小齿轮

10 Accessories (on request)

- Gearbox
- Hydraulic motor
- Electric motor
- Torque limiter/ torque limit coupling
- Motor mounting flange
- Valve block
- Brake
- Pinion

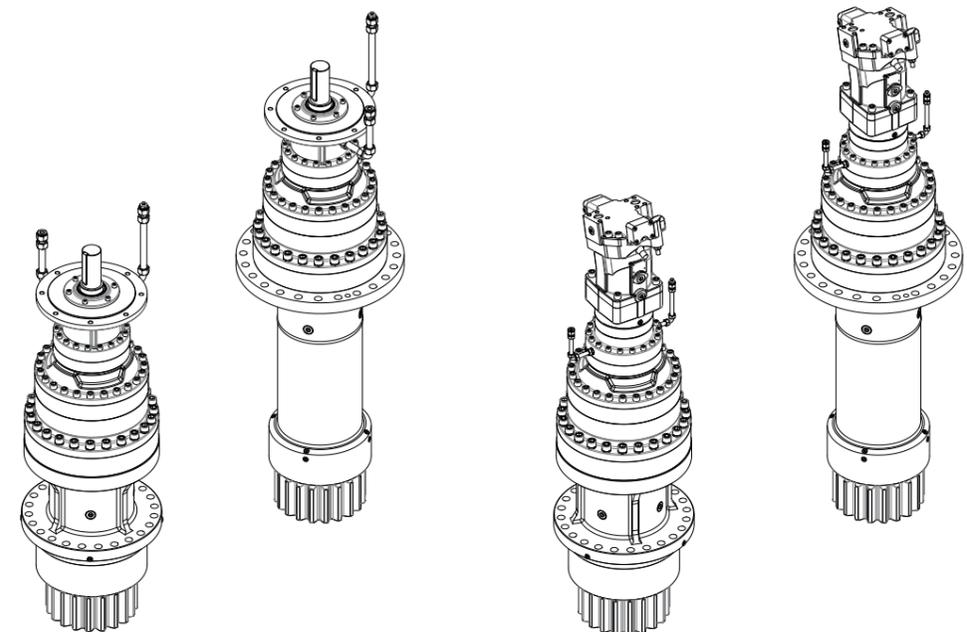


11 轴端中心孔

11 End shaft central hole

轴端C型螺纹中心孔


C type screw central hole

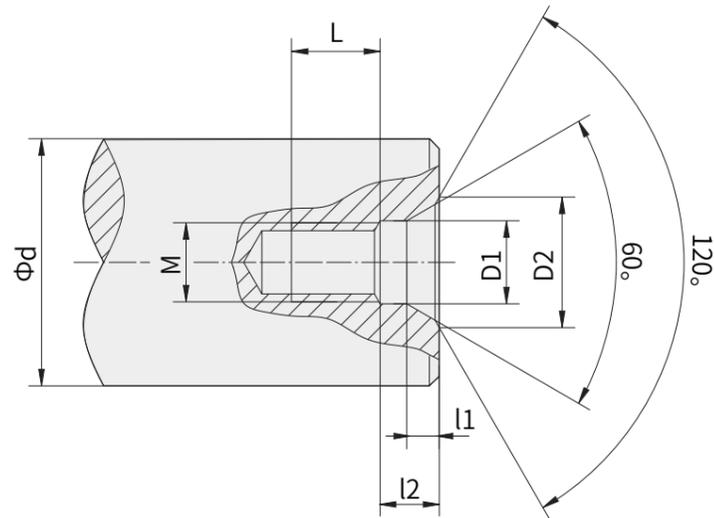

d	M	L	12	11	D1	D2
7 < d ≤ 10	M3	10	2.6	1.8	3.2	5.8
10 < d ≤ 13	M4	10	3.2	2.1	4.3	7.4
13 < d ≤ 16	M5	10	4	2.4	5.3	8.8
16 < d ≤ 21	M6	12	5	2.8	6.4	10.5
21 < d ≤ 24	M8	12	6	3.3	8.4	13.2
24 < d ≤ 30	M10	15	7.5	3.8	10.5	16.3
30 < d ≤ 38	M12	20	9.5	4.4	13	19.8
38 < d ≤ 50	M16	25	12	5.2	17	25.3
50 < d ≤ 85	M20	30	15	6.4	21	31.3
85 < d ≤ 130	M24	35	18	8	25	38
130 < d ≤ 225	M30	45	18	11	31	48

12 平键与键槽尺寸

12 Key and keyway dimension

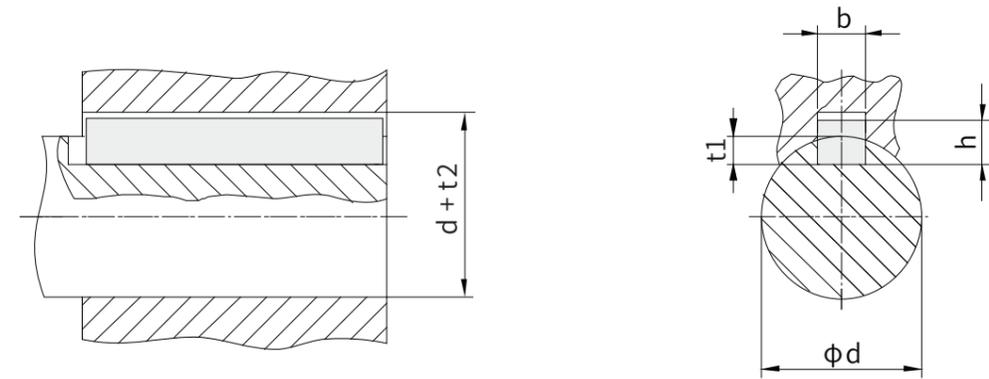

d	b	h	t1	d + t2
8 < d ≤ 10	3	3	1.8	d+1.4
10 < d ≤ 12	4	4	2.5	d+1.8
12 < d ≤ 17	5	5	3	d+2.3
17 < d ≤ 22	6	6	3.5	d+2.8
22 < d ≤ 30	8	7	4	d+3.3
30 < d ≤ 38	10	8	5	d+3.3
38 < d ≤ 44	12	8	5	d+3.3
44 < d ≤ 50	14	9	5.5	d+3.8
50 < d ≤ 58	16	10	6	d+4.3
58 < d ≤ 65	18	11	7	d+4.4
65 < d ≤ 75	20	12	7.5	d+4.9
75 < d ≤ 85	22	14	9	d+5.4
85 < d ≤ 95	25	14	9	d+5.4
95 < d ≤ 110	28	16	10	d+6.4
110 < d ≤ 130	32	18	11	d+7.4
130 < d ≤ 150	36	20	12	d+8.4
150 < d ≤ 170	40	22	13	d+9.4
170 < d ≤ 200	45	25	15	d+10.4
200 < d ≤ 230	50	28	17	d+11.4
230 < d ≤ 260	56	32	20	d+12.4

13 设计参数表

公司名称: _____
 地址: _____
 联系人: _____
 电话: _____ 传真: _____
 应用: _____ (举例: 门座起重机、克令吊、汽车吊、船载起重等)
 用于: _____ (举例: 回转减速等)

工况概述	技术参数
额定输出扭矩: [KNm]	输出小齿轮:
最大动态输出扭矩: [KNm]	模数 m: [mm]
静态输出扭矩: [KNm]	齿数 Z:
输入转速: [m/min]	齿宽 b: [mm]
输出转速: [m/min]	变位系数 X:
公称减速比:	<input type="checkbox"/> 小齿轮分体: <input type="checkbox"/> DIN5480花键连接 <input type="checkbox"/> 平键联接
偏心: [mm]	<input type="checkbox"/> 小齿轮一体
法兰安装形式: <input type="checkbox"/> 法兰 A 输出长轴壳体长度L: [mm] <input type="checkbox"/> 法兰 B	<input type="checkbox"/> 小齿轮齿面高频淬火表面硬化 <input type="checkbox"/> 小齿轮渗碳淬火磨齿
安装位置: 输出齿轮 <input type="checkbox"/> 上 <input type="checkbox"/> 下 <input type="checkbox"/> 水平	中心距 A: [mm]

分类按 FEM1.001---ISO4301

设备分组 M: _____ 起重等级 L: _____ 工作时间等级 T: _____

驱动单元

<input type="checkbox"/> 电机驱动: 型号: _____ 功率 P: _____ [KW] 额定转速 n: _____ [rpm] 起动转矩 MA: _____ [Nm] 极限转矩 Tk: _____ [Nm] 起动时间 ED: _____ 每小时起动: _____	<input type="checkbox"/> 液压马达驱动 型号: _____ 有效流量: _____ [L/min] 有效压力差 ΔP : _____ [bar] 排量 V_g : _____ [cm ³]
--	--

制动

类型 <input type="checkbox"/> 驻车制动	应用类型 <input type="checkbox"/> 液压 工作压力最小 _____ [bar] 工作压力最大 _____ [bar]
<input type="checkbox"/> 工作制动	<input type="checkbox"/> 电力/磁力

目前供货范围 (具体请垂询)

- 齿轮箱 力矩限制器/力矩限制联轴器 制动器
 液压马达 电机安装法兰 小齿轮
 电动机 阀块

备注和特殊要求: _____

13 Parameter table

Company name: _____
 Address: _____
 Contact: _____
 Tel: _____ Fax: _____
 Application: _____ (e.g. gantry crane, crane, mobile crane, ship offshore harbor crane etc.)
 Used for: _____ (e.g. slewing deceleration etc.)

Operating condition	Technical data
Rated output torque T _{dyn} : [KNm]	Output pinion:
Max. dynamic output torque T _{dyn max} : [KNm]	Normal module m: [mm]
Static output torque T _{stat} : [KNm]	Number of teeth Z:
Input speed n ₁ : [m/min]	Tooth width b: [mm]
Output speed n ₂ : [m/min]	Modification factor X:
Nominal ratio i _N :	<input type="checkbox"/> Pinion two-pieces: <input type="checkbox"/> DIN5480Spline connection <input type="checkbox"/> Parallel key connection
Eccentricity: [mm]	<input type="checkbox"/> Pinion one-piece
Flange mounting method: <input type="checkbox"/> Flange A output long shaft [mm] housing length L: <input type="checkbox"/> Flange B	<input type="checkbox"/> Pinion surface high frequency quenching, surface hardening <input type="checkbox"/> Pinion quenching, grinding gears
Mounting position: output gear <input type="checkbox"/> Up <input type="checkbox"/> Down <input type="checkbox"/> Level	Center distance A: [mm]

Classify as FEM1.001---ISO4301

Drive unit group M: _____ The load spectrum L: _____ Running time classification T: _____

Drive unit

<input type="checkbox"/> electric motor drive: Type: _____ Power P: _____ [KW] Rated speed n: _____ [rpm] Starting torque MA: _____ [Nm] Breakdown torque Tk: _____ [Nm] Starting time ED: _____ Starting per hour: _____	<input type="checkbox"/> hydraulic motor drive Type: _____ Available oil flow q _v : _____ [L/min] Available pressure difference ΔP : _____ [bar] DisplacementV _g : _____ [cm ³]
--	---

Brake

Apply as <input type="checkbox"/> parking brake	Actuation <input type="checkbox"/> hydraulically Min. release pressure _____ [bar] Max. release pressure _____ [bar]
<input type="checkbox"/> service braking	<input type="checkbox"/> electric/ magnetic

Scope of supply (on request)

- Gearbox Torque limiter/ torque limit coupling Brake
 Hydraulic motor Motor mounting flange Pinion
 Electric motor Valve block

Remarks and special requests: _____

随着技术迭代进步,博能产品样本将会同步更新,请谅解。
 Along with the technology advancedet.,the product of
 the manual of Boneng will be changed,please forgive.

控制层 CONTROL

驱动层 DRIVE

马达层 MOTOR

齿轮层 GEAR



X3010 PLC
EtherCAT&Modbus
24VDC



X3050 运动控制器
Motion Controller
EtherCAT&Modbus
24VDC

C/F/K/S-M
* . . . D
马达分布式
变频驱动器
Integrated
Gearmotor
Drive



EtherCAT&
Modbus
380~480VAC
0.25~3kW
i=4~355

AM 变频驱动器
Variable Frequency Drive



Modbus
380~480VAC
0.75~5.5kW

A1 变频驱动器
Variable Frequency Drive



Modbus/CANopen
/PROFINET
380~480VAC
0.75~250kW

C/F/K/S/R
齿轮马达
Gearmotor



380~480VAC
0.09~200kW
i=1.25~500

MP/MU/MA
三相交流异步马达
Asynchronous Motor



380~480VAC
0.09~90kW
960/1450r/min
1160/1750r/min

HB/BE/HK
齿轮箱
Gearbox



4.2~15775kW
i=5.6~450

P/PK
行星齿轮箱
Planetary
Gearbox



0.4~14000kW
i=25~4000

PW
卷扬齿轮箱
Planetary
Winch
Gearbox



1~1810kW
i=13~940

PS
回转齿轮箱
Planetary
Slewing
Gearbox



1~1626kW
i=14~947

J/JB
升降机
Jack



0.35~22.63kW
i=5~34

T
转向箱
Spiral Bevel
Gearbox



0.08~303kW
i=1:1~3:1

MX&AX
伺服马达&伺服
驱动器
Permanent
Magnet
Servo Motor
& Servo Drive



EtherCAT/
PROFINET
380~480VAC
0.28~14kW
1500/2000r/min
3000/4500r/min

C/F/K/S-MX
& AX 齿轮伺
服马达&伺
服驱动器
Servo
Gearmotor
& Servo Drive



EtherCAT/
PROFINET
380~480VAC
0.28~14kW
i=1.25~315

PX-MX&AX
行星伺服马达
& 伺服驱动器
Planetary
Precision Gear
Servo Motor
& Servo Drive



EtherCAT/
PROFINET
380~480VAC
0.38~14kW
i=3~100

PN-MN&AN
行星伺服马达
& 伺服驱动器
Planetary
Precision Gear
Servo Motor
& Servo Drive



EtherCAT
380~480VAC
0.28~5.03kW
i=3~100

博能传动(沈阳)有限公司	BONENG TRANSMISSION(SHENYANG)CO.,LTD.
辽宁省沈阳市沈北新区 太平洋工业城A区A73-6号 电话: 024-31271571	No. A73-6, Area A, Pacific Industrial City, Shenbei New District, Shenyang, Liaoning Province, China TEL: 024-31271571
博能传动(天津)有限公司	BONENG TRANSMISSION(TIANJIN)CO.,LTD.
天津市北辰区双海道6号 宏鹏工业园7号车间 电话: 022-26929556	7th Workshop, Hongpeng Industrial Park, No. 6 Shuanghai Road, Beichen District, Tianjin City,China TEL: 022-26929556
博能传动(潍坊)有限公司	BONENG TRANSMISSION(WEIFANG)CO.,LTD.
山东省潍坊市安丘市经济开发区 汶水路与昆仑大街交叉口往北 100米路东1号车间 电话: 0536-2141166	1st Workshop, Economic Development Zone, Anqiu, Weifang City, Shandong Province, China TEL: 0536-2141166
博能传动(开封)有限公司	BONENG TRANSMISSION(KAIFENG)CO.,LTD.
河南省开封市宋城路四大街11号 海神机械院内五号厂房 电话: 0371-23335238	5th Workshop, Haishen Machinery, No.11, Fourth Street, Songcheng Road,New District, Kaifeng City, Henan Province, China TEL: 0371-23335238
博能传动(长沙)有限公司	BONENG TRANSMISSION(CHANGSHA)CO.,LTD.
湖南省长沙市望城经济开发区 普瑞大道1288号 电话: 0731-88386958	No. 1288 Puri Avenue, Wangcheng Economic Development Zone, Changsha City, Hunan Province, China TEL: 0731-88386958
博能传动设备(成都)有限公司	BONENG TRANSMISSION EQUIPMENT(CHENGDU) CO., LTD.
四川省成都市金牛区金牛坝路9号5栋 向荣中心A座7楼-703 电话: 028-87741100	703, 7th Floor, Block A, Xiangrong Center, Building 5, No. 9 Jinniuba Road, Jinniu District, Chengdu City, Sichuan Province, China TEL: 028-87741100
博能传动(肇庆)有限公司	BONENG TRANSMISSION(ZHAOQING)CO.,LTD.
广东省肇庆市鼎湖区肇庆新区 科创大道7号平谦国际现代产业园 一期A12北厂房 电话: 0757-86719757	No. 7 Science and Technology Innovation Avenue, Zhaoqing New Area, Dinghu District, Zhaoqing City, Guangdong Province, China TEL: 0757-86719757
博能传动(苏州)有限公司	BONENG TRANSMISSION(SUZHOU)CO.,LTD.
江苏省苏州市相城区如元路100号 电话: 0512-66189662	No. 100, Ruyuan Road, Xiangcheng District, Suzhou, Jiangsu Province, China TEL: 0512-66189662

博能传动(美国)有限公司	BONENG TRANSMISSION(USA)LLC.
1250 E 222nd Euclid, OH 44117, United Staes TEL: 1-216-618-0138 TEL: 1-216-618-0496 TEL: 1-216-618-3099	1250 E 222nd Euclid, OH 44117, United Staes TEL: 1-216-618-0138 TEL: 1-216-618-0496 TEL: 1-216-618-3099
博能传动(印度)有限公司	BONENG TRANSMISSION(INDIA)PVT.LTD
Plot No. E-10/3, MIDC sinnar (Malegaon) Industrial Area, Nashik, 422123, Maharashtra, India. TEL:+91-11- 4507 6293 (DELHI) TEL:+91-22-2781 3385 (MUMBAI)	Plot No. E-10/3, MIDC sinnar (Malegaon) Industrial Area, Nashik, 422123, Maharashtra, India. TEL:+91-11- 4507 6293 (DELHI) TEL:+91-22-2781 3385 (MUMBAI)