

PX-MX行星精密齿轮伺服马达&AX伺服驱动器

PX-MX Planetary precision Servo Gearmotor & AX Servo Drivers




PX-MX行星精密齿
轮伺服马达&AX伺
服驱动器

PX-MX Planetary
precision Servo
Gearmotor & AX
Servo Drivers

(0.38kW~10.06kW)

Edit date 08/2026
Selection Catalogue: C05.0050

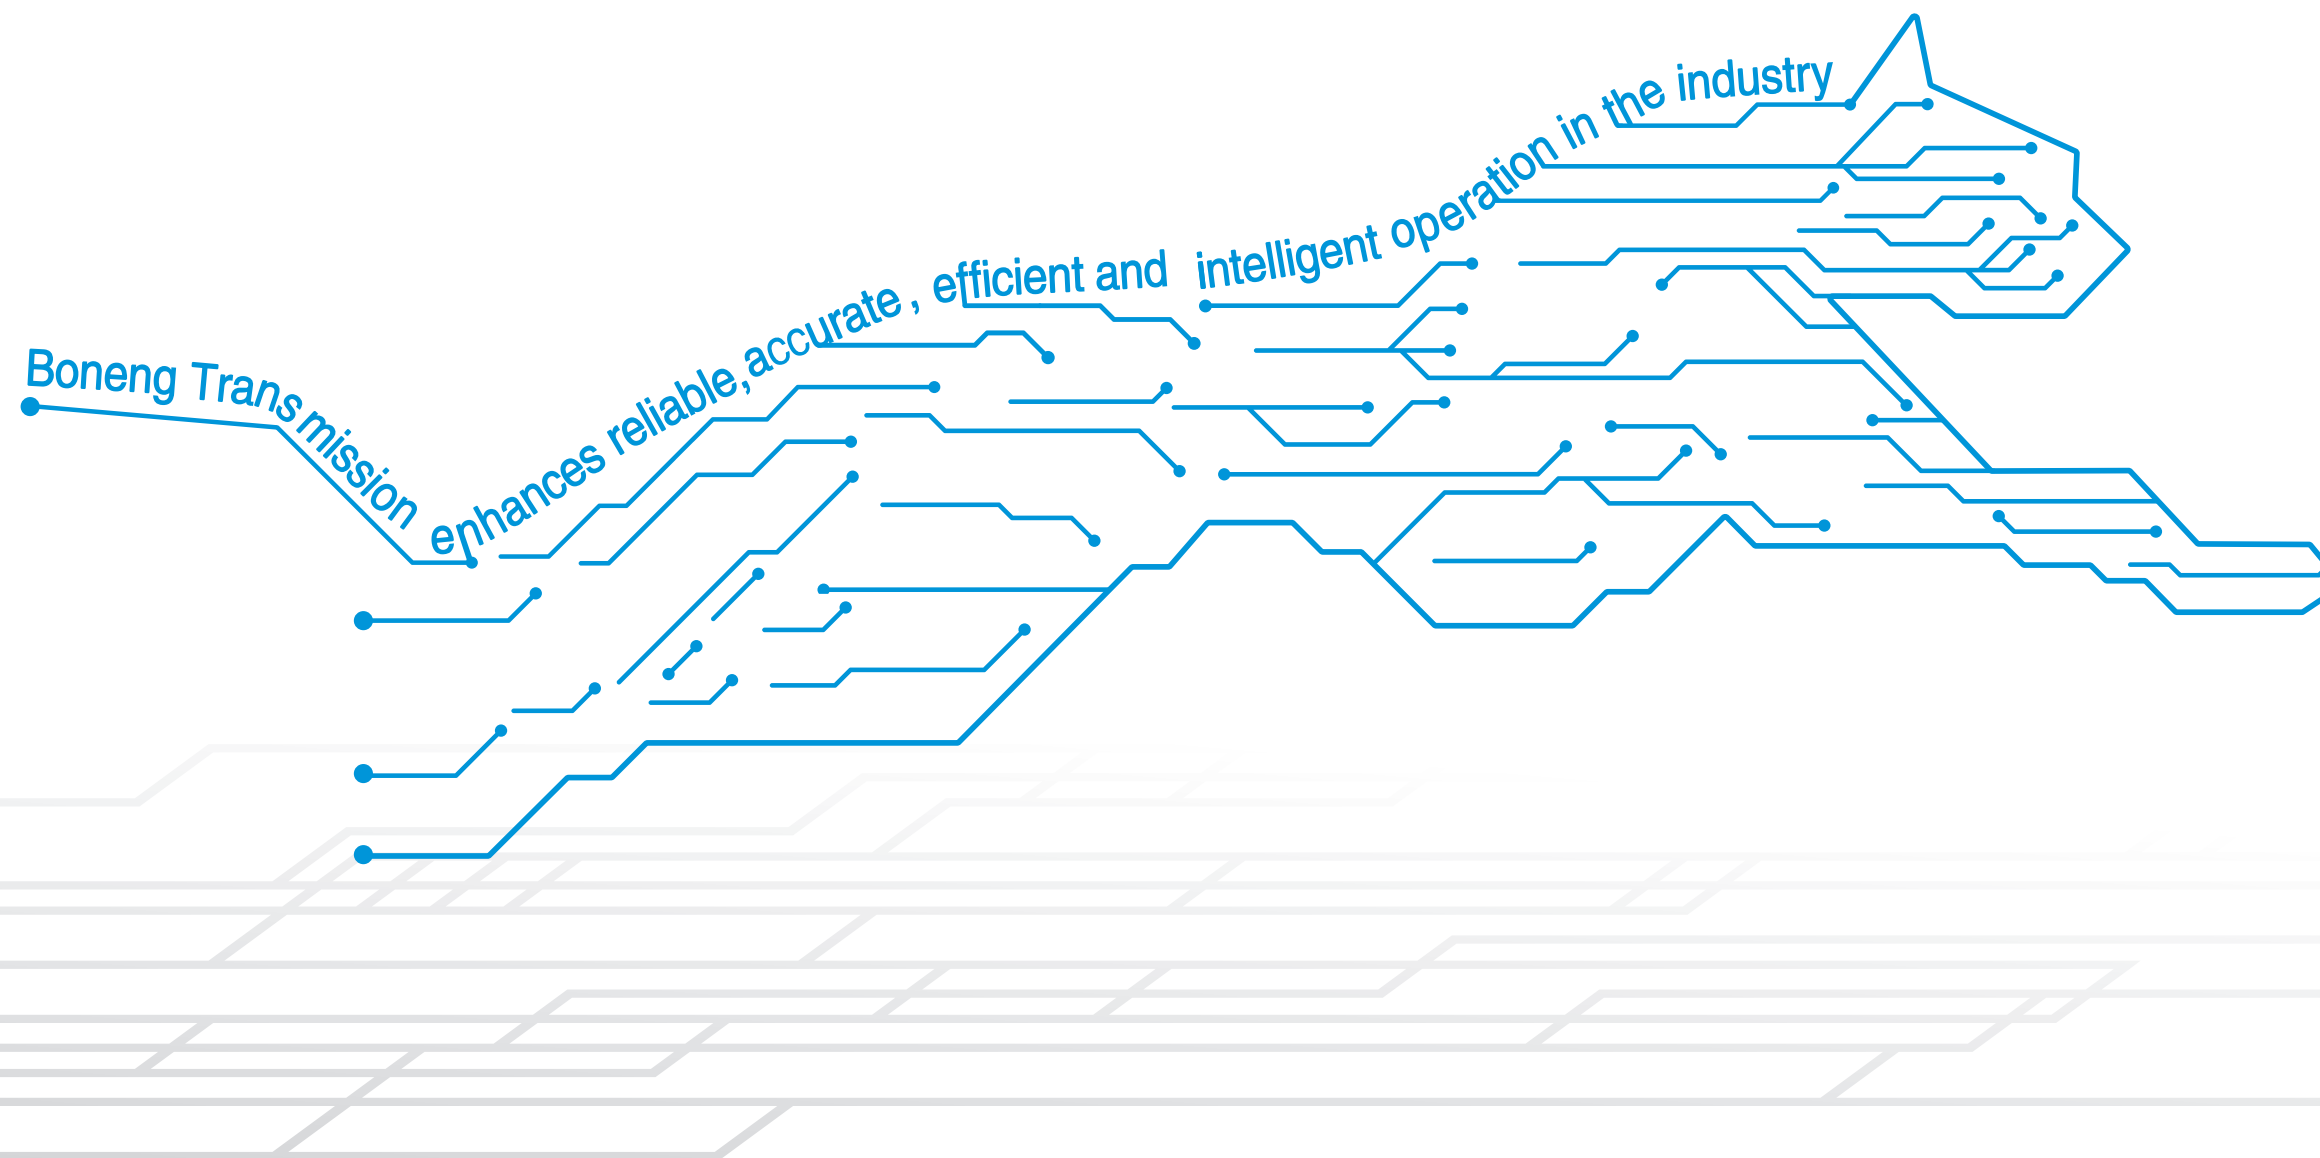

控制器/驱动器/马达/
齿轮马达/齿轮箱





Controller/ Drive/ Motor/
Gearmotor/ Gearbox

PX-MX行星精密齿轮伺服马达&AX伺服驱动器

- ◆ 高精度硬齿面齿轮，噪音低，回程间隙小；具有良好的精度保持性和稳定性，更适合高精端产品的使用；
- ◆ 直连伺服马达，结构紧凑，功率密度高；
- ◆ 高度的模块化设计，可实现更加快捷的生产和物流周期；
- ◆ 高可靠性和长设计寿命可有效降低您的使用成本及维护成本；
- ◆ 伺服马达不仅拥有坚固紧凑的结构及高防护等级，而且具有高效率、高过载承载能力等特点；其优良的径向跳动质量和细微的转矩波动，可实现高质量的工件表面加工；
- ◆ 与博能Agile系列驱动器结合使用形成一个强大的伺服系统，可实现无缝集成，完美协同。

PX-MX Planetary precision Servo Gearmotor & AX Servo Drivers

- ◆ High precision hard tooth surface gears with low noise and small return clearance; Having good accuracy retention and stability, it is more suitable for the use of high-precision products;
- ◆ Direct servo motor, compact structure, high power density;
- ◆ The highly modular design enables faster production and logistics cycles;
- ◆ High reliability and long design life can effectively reduce your use and maintenance costs;
- ◆ Servo motor not only has a strong compact structure and high protection grade, but also has characteristics such as high efficiency, high overload carrying capacity; Its excellent radial runout quality and subtle torque fluctuation can realize high quality workpiece surface machining;
- ◆ Combined with boneng Agile series drive to form a powerful servo system, can achieve seamless integration, perfect coordination.

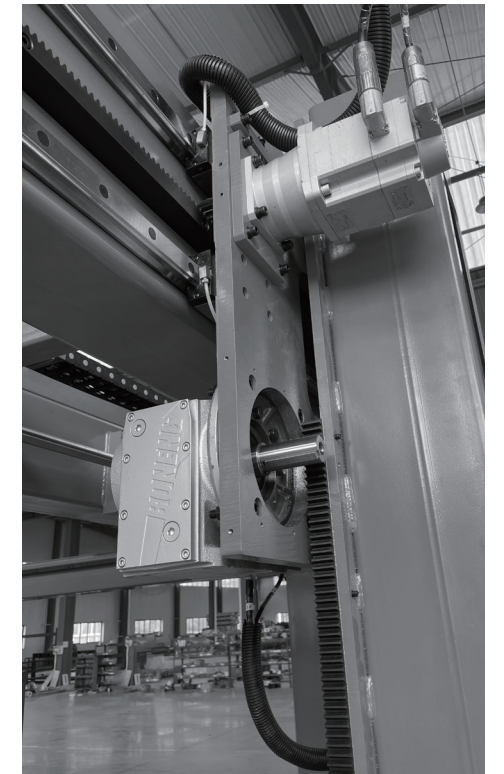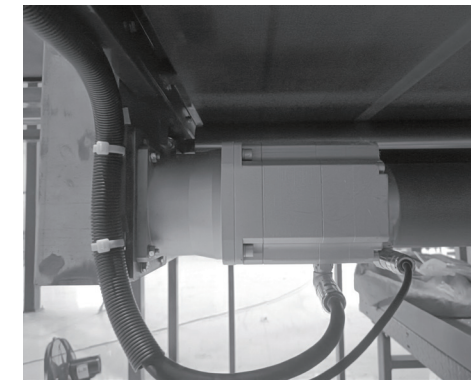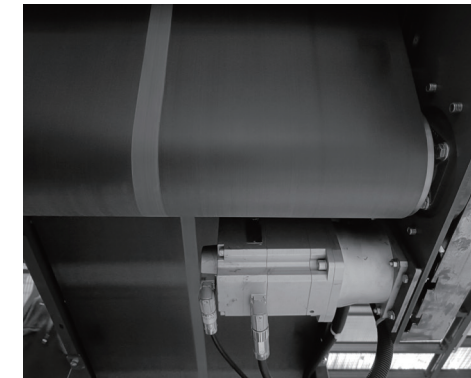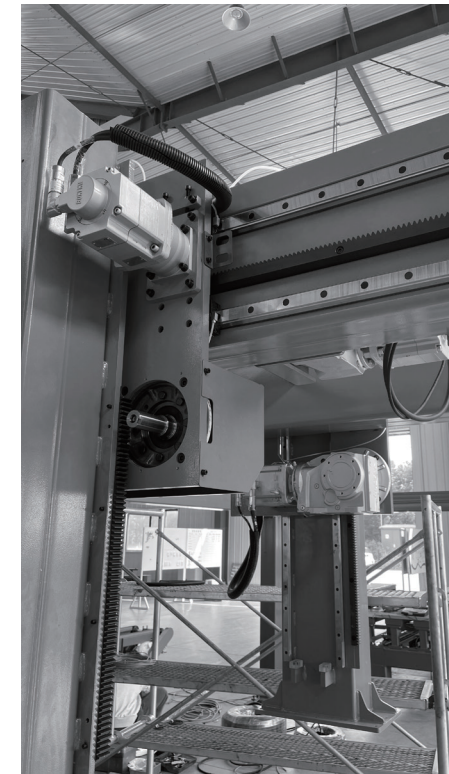

产品广泛应用于机床、机器人、印刷机械、包装机械、纺织机械、自动化设备等各个领域。
博能传动公司总部和各大区域的技术专家以及各区域办事处的应用工程师、售后服务技师竭诚为您提供全面的技术咨询和完善的服务。

Products are widely used in machine tool, robots, printing machines, packaging machines, textile machinery, automation equipment and other fields.
Boneng Transmission company headquarters and major regional technical experts and regional offices of the application engineers, after-sales service technicians dedicated to provide you with comprehensive technical advice and perfect service.

造型注意事项

- ◆ 结构示意图、外形图及其它附图只属范例，无严格比例要求。(未注尺寸单位：mm)
- ◆ 所注重量仅为平均值，并不具有约束力。

⚠使用注意事项

- ◆ 为防止意外事故发生，所有旋转部件均按照使用者所在国家和地区的安全规范由购置方加罩保护。
- ◆ 试运行之前必须认真阅读使用说明书。
- ◆ 行星齿轮马达应由熟悉相关安全要求的专业人员安装；安装时必须有安全装置以防止事故发生，安装位置必须符合规定。

Selection precautions

- ◆ The structural schematic diagram, exterior diagram, and other accompanying drawings are only examples and do not have strict scale requirements. (Size units not specified:mm).
- ◆ The weight indicated is only the average value and does not have any binding force.

⚠Precautions for use

- ◆ To prevent accidents, all rotating parts are covered and protected by the purchaser in accordance with the safety regulations of the user's country and regio.
- ◆ Planetary gear motors should be installed by professionals familiar with relevant safety requirements;
- ◆ Safety devices must be installed to prevent accidents, ensuring safetyThe installation position must comply with regulations.

PX...S-MX行星精密齿轮
伺服马达

01.型号表示方法	01
02.安装方位	01
03.传动能力表和外形尺寸图	03
04.输出轴允许的轴向力和径向力	55
05.重量表	55

PX...T-MX行星精密齿轮
伺服马达

06.型号表示方法	57
07.安装方位	57
08.传动能力表和外形尺寸图	59
09.输出轴允许的轴向力和径向力	107
10.重量表	107

伺服驱动器

11.驱动器概述	109
12.驱动器整机安装尺寸图	110
13.驱动器控制模块	112
14.驱动器功率模块	120
15.驱动器操作面板	125
16.驱动器可选件	126

PX...S-MX Planetary precision
Servo Gearmotor


01.Model representation method	01
02.Installation orientation	01
03.Transmission capacity table and external dimension diagram ..	03
04.Permissible axial and radial forces on the output shaft	55
05.Weight table	55

PX...T-MX Planetary precision
Servo Gearmotor

06.Model representation method	57
07.Installation orientation	57
08.Transmission capacity table and external dimension diagram ..	59
09.Permissible axial and radial forces on the output shaft	107
10.Weight table	107

Servo Drive

11.Servo drive overview	109
12.Drive full machine mounting size	110
13.Control module	112
14.Power module	120
15.Operation panel	125
16.Options	126



PX...S-MX行星
精密齿轮伺服马达

1 型号表示方法

PX...S-MX
Planetary precision
Servo Gearmotor

1 Model
representation method

产品分类代号

PX=精密型

行星齿轮级数

1=1级
2=2级

机座号

02/03/04/05/06/07

产品系列代号

S=方法兰

输出轴形式代号

A=光滑实心轴
B=平键实心轴
C=外花键实心轴

公称速比代号

安装方位

B5/V1/V3/S1

回程间隙

S=标准间隙

输出轴轴承配置

1=圆锥滚子轴承

润滑油代号

1=合成润滑油

Product classification code

PX=Precision type

Planetary gear series

1=1stage
2=2stage

Frame size

02/03/04/05/06/07

Product series code

S=Square flange

Output shaft form code

A=Smooth solid shaft
B=Flat key solid shaft
C=External spline solid shaft

Nominal speed ratio code

Installation orientation

B5/V1/V3/S1

Return clearance

S=Standard clearance

Output shaft bearing configuration

1 = Tapered roller bearing


Lubricating code

1=Synthetic lubricating oil


PX 2 03 S A - C20 - B5 S 1 1 -

2 安装方位


2 PX...S-MX Installation
orientation




B5-水平 B5 level

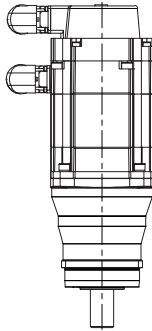

V1-垂直 V1-Vertical
(输出轴 向下) (output axis down)

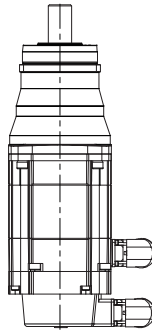

V3-垂直 V3-Vertical
(输出轴 向上) (output axis up)



S1-可以从 S1-can flip
水平到翻 from
转±90° horizontal
to ± 90°

MX 048S 1 E45 F P 1-N 4 A 0 6 - 1 1 1

连接器位置

1=可旋转

连接器类型

1=规格1

连接器方位

保护等级

6=IP66

热保护

0=无绕组保护

制动器

N=无制动器
A=永磁制动器

编码器

4=Biss-C编码器(线缆≤50m)

冷却方式

N=自然冷却

轴孔径代号

1、2、3...

轴伸形式P

法兰形式F/L

额定转速代号

E20=2000r/min
E30=3000r/min
E45=4500r/min

结构形式

1=紧凑型

机座号

三相交流同步
伺服马达

Connector location

1=Rotable

Connector Type

1 = Specifications 1

Connector orientation

Protection class

6=IP66

Thermal protect

0=Without thermal protection

Brake

N=Without brake
A=With brake

Encoder

4=Biss-C Encoder(Cable length≤50m)

Cooling method

N=Natural Cooling

Axis aperture code

1、2、3...

Axial extension form P

Flange form F/L

Rated speed code

E20=2000r/min
E30=3000r/min
E45=4500r/min

Structural type

1 = Compact

Frame size

Three Phase AC
Synchronous
Servomotor

3 PX..S-MX传动能力表和外形尺寸图

伺服马达：0.38KW 0.8Nm 1.2A 4500r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
n _{2N} r/min	T ₂ N.m	Code	i	i _{ex}	T _{2N} N.m	T _{2B} N.m	T _{2a} N.m	T _{2NOT} N.m	J ₁ kgcm ²	J _t arcmin	f
643	5.5	B70	7	7/1	28	52	70	110	0.18	4	5.11
450	7.8	C10	10	10/1	28	40	55	105	0.17	4	3.58
375	9.1	C12	12	12/1	32	40	50	100	0.17	4	3.51
281	12.1	C16	16	16/1	42	52	60	110	0.17	4	3.46
225	15.2	C20	20	20/1	42	52	60	110	0.16	4	2.77
180	19.0	C25	25	25/1	42	52	70	110	0.16	4	2.21
161	21.2	C28	28	28/1	42	52	60	110	0.16	4	1.98
150	22.8	C30	30	30/1	32	40	50	100	0.15	4	1.41
129	26.6	C35	35	35/1	42	52	70	110	0.16	4	1.58
113	30.4	C40	40	40/1	42	52	60	110	0.15	4	1.38
90	37.9	C50	50	50/1	42	52	70	110	0.15	4	1.11
161	21.2	C28	28	28/1	105	132	132	255	0.18	4	4.94
150	22.8	C30	30	30/1	88	110	110	200	0.17	4	3.87
129	26.6	C35	35	35/1	110	138	165	255	0.18	4	4.14
113	30.4	C40	40	40/1	105	132	132	255	0.17	4	3.46
90	37.9	C50	50	50/1	110	138	165	255	0.17	4	2.90
64	53.1	C70	70	70/1	95	118	118	255	0.17	4	1.79
45	75.9	D10	100	100/1	88	110	110	200	0.16	4	1.16

此规格高速级内齿圈
目前不是硬齿面

The high-speed inner gear ring of
this specification is currently
not a hard tooth surface






3 PX..S-MX Transmission capacity table and external dimension diagram

Servo motor: 0.38KW 0.8Nm 1.2A 4500r/min

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
Planetary precision servo gearmotor oder number	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX102S□-B70-□□1□-MX028S1E45LP1	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX102S□-C10-□□1□-MX028S1E45LP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202S□-C12-□□1□-MX028S1E45FP1	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202S□-C16-□□1□-MX028S1E45FP1	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202S□-C20-□□1□-MX028S1E45FP1	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202S□-C25-□□1□-MX028S1E45FP1	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202S□-C28-□□1□-MX028S1E45FP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202S□-C30-□□1□-MX028S1E45FP3	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202S□-C35-□□1□-MX028S1E45FP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202S□-C40-□□1□-MX028S1E45FP3	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202S□-C50-□□1□-MX028S1E45FP3	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX203S□-C28-□□1□-MX028S1E45LP1	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX203S□-C30-□□1□-MX028S1E45LP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX203S□-C35-□□1□-MX028S1E45LP1	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX203S□-C40-□□1□-MX028S1E45LP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX203S□-C50-□□1□-MX028S1E45LP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX203S□-C70-□□1□-MX028S1E45LP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX203S□-D10-□□1□-MX028S1E45LP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75






Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

MX028S Outline dimension diagram (mm)

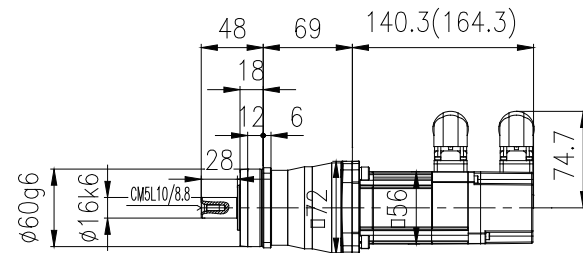


PX102S□-□□□-□□□□-MX028S1E45□P□






Outline dimension diagram of the equipped servo driver

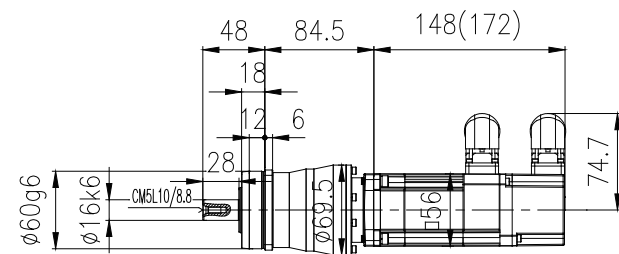

PX202S□-□□□-□□□□-MX028S1E45□P□

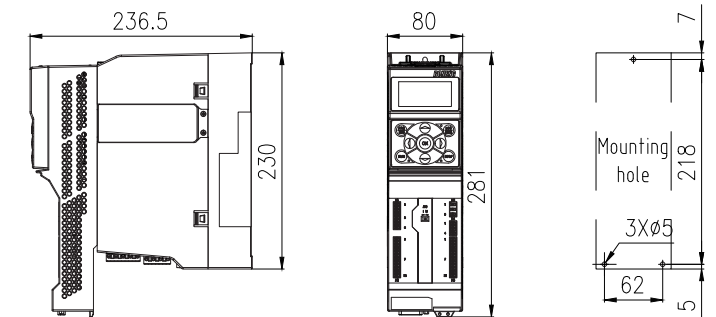

Control module: AX-CM55-PA-PE(ProfiNet) or
AX-CM55-EA-PE(EtherCAT)
Power module: AX-PM26-B3A75-N(Without filter) or
AX-PM26-B3A75-F(With filter)
Operator module: A1-OP25

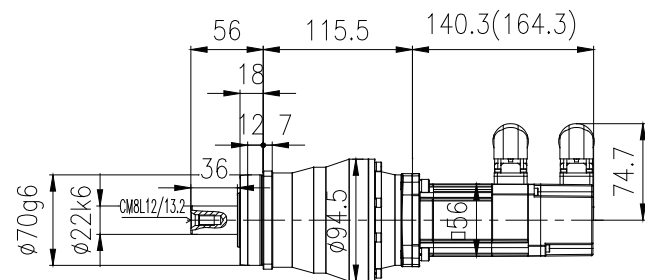

PX203S□-□□□-□□□□-MX028S1E45□P□

注: () 为带制动器尺寸

Note: () is the size with brake.

伺服马达: 0.54KW 1.1Nm
1.8A 4500r/min

Servo motor: 0.54KW 1.1Nm
1.8A 4500r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
643	7.8	B70	7	7/1	28	52	70	110	0.28	4	3.60
450	11.1	C10	10	10/1	28	40	55	105	0.27	4	2.52
375	12.9	C12	12	12/1	32	40	50	100	0.27	4	2.47
281	17.3	C16	16	16/1	42	52	60	110	0.27	4	2.43
225	21.6	C20	20	20/1	42	52	60	110	0.26	4	1.95
180	27.0	C25	25	25/1	42	52	70	110	0.26	4	1.56
161	30.2	C28	28	28/1	105	132	132	255	0.28	4	3.48
150	32.3	C30	30	30/1	88	110	110	200	0.27	4	2.72
129	37.7	C35	35	35/1	110	138	165	255	0.28	4	2.91
113	43.1	C40	40	40/1	105	132	132	255	0.27	4	2.43
90	53.9	C50	50	50/1	110	138	165	255	0.27	4	2.04
64	75.5	C70	70	70/1	95	118	118	255	0.27	4	1.26

此规格高速级内齿圈
目前不是硬齿面

The high-speed inner gear ring of
this specification is currently
not a hard tooth surface

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
Planetary precision servo gearmotor oder number	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX102S□-B70-□□1□-MX028M1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102S□-C10-□□1□-MX028M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202S□-C12-□□1□-MX028M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202S□-C16-□□1□-MX028M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202S□-C20-□□1□-MX028M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202S□-C25-□□1□-MX028M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C28-□□1□-MX028M1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C30-□□1□-MX028M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C35-□□1□-MX028M1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C40-□□1□-MX028M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C50-□□1□-MX028M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C70-□□1□-MX028M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

MX028M Outline dimension diagram (mm)	Outline dimension diagram of the equipped servo driver
Front view dimensions: 48, 69, 185.3(209.3), 74.7, 60g6, 16k6, 28, 12, 6, 7.2, 56, 15.6. Top view dimensions: 68, 62, 45°, 4x5.5EQS, 5h9, 18, 16k6, 28, 2, 25. Side view dimensions: 26, 21, 16k6, 5, 16x0.8x30x18x6m, DIN 5480. PX102S□-□□□-□□□□-MX028M1E45□P□	
Front view dimensions: 48, 84.5, 193(217), 74.7, 60g6, 16k6, 28, 12, 6, 69.5, 56, 15.6. Top view dimensions: 68, 62, 45°, 4x5.5EQS, 5h9, 18, 16k6, 28, 2, 25. Side view dimensions: 26, 21, 16k6, 5, 16x0.8x30x18x6m, DIN 5480. PX202S□-□□□-□□□□-MX028M1E45□P□	Front view dimensions: 236.5, 230. Side view dimensions: 80, 281. Mounting hole view dimensions: 218, 7, 3x5, 62, 5. Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3B15-N(Without filter) or AX-PM26-B3B15-F(With filter) Operator module: A1-OP25
Front view dimensions: 56, 115.5, 185.3(209.3), 74.7, 70g6, 22k6, 36, 12, 7, 94.5, 56, 15.6. Top view dimensions: 85, 76, 45°, 4x6.6EQS, 6h9, 24.5, 22k6, 36, 2, 32. Side view dimensions: 26, 22.5, 22k6, 5, 22x1.25x30x16x6m, DIN 5480. PX203S□-□□□-□□□□-MX028M1E45□P□	

注： () 为带制动器尺寸 Note: () is the size with brake.

伺服马达：0.66KW 1.4Nm
1.9A 4500r/min

Servo motor: 0.66KW 1.4Nm
1.9A 4500r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
1500	4.1	B30	3	3/1	22	40	55	100	0.91	4	5.40
1125	5.4	B40	4	4/1	28	52	70	110	0.83	4	5.15
900	6.8	B50	5	5/1	28	52	70	110	0.8	4	4.12
643	9.5	B70	7	7/1	28	52	70	110	0.77	4	2.94
450	13.6	C10	10	10/1	28	40	55	105	0.76	4	2.06
375	15.8	C12	12	12/1	32	40	50	100	0.76	4	2.02
281	21.1	C16	16	16/1	42	52	60	110	0.76	4	1.99
225	26.4	C20	20	20/1	42	52	60	110	0.75	4	1.59
180	32.9	C25	25	25/1	42	52	70	110	0.75	4	1.27
375	15.8	C12	12	12/1	88	110	110	200	0.86	4	5.56
281	21.1	C16	16	16/1	105	132	132	255	0.84	4	4.98
225	26.4	C20	20	20/1	105	132	132	255	0.81	4	3.98
180	32.9	C25	25	25/1	110	138	165	255	0.81	4	3.34
161	36.9	C28	28	28/1	105	132	132	255	0.77	4	2.85
150	39.5	C30	30	30/1	88	110	110	200	0.76	4	2.23
129	46.1	C35	35	35/1	110	138	165	255	0.77	4	2.38
113	52.7	C40	40	40/1	105	132	132	255	0.76	4	1.99
90	65.9	C50	50	50/1	110	138	165	255	0.76	4	1.67
64	92.3	C70	70	70/1	95	118	118	255	0.76	4	1.03
113	52.7	C40	40	40/1	285	360	360	630	0.82	3	5.41
90	65.9	C50	50	50/1	285	360	360	630	0.81	3	4.33
64	92.3	C70	70	70/1	285	360	360	630	0.81	3	3.09
45	131.8	D10	100	100/1	215	270	270	630	0.8	3	1.63

此规格高速级内齿圈
目前不是硬齿面

The high-speed inner gear ring of
this specification is currently
not a hard tooth surface

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
Planetary precision servo gearmotor oder number	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX102S□-B30-□□1□-MX036S1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102S□-B40-□□1□-MX036S1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102S□-B50-□□1□-MX036S1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102S□-B70-□□1□-MX036S1E45FP3	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102S□-C10-□□1□-MX036S1E45FP4	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202S□-C12-□□1□-MX036S1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202S□-C16-□□1□-MX036S1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202S□-C20-□□1□-MX036S1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202S□-C25-□□1□-MX036S1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C12-□□1□-MX036S1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C16-□□1□-MX036S1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C20-□□1□-MX036S1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C25-□□1□-MX036S1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C28-□□1□-MX036S1E45FP3	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C30-□□1□-MX036S1E45FP4	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C35-□□1□-MX036S1E45FP3	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C40-□□1□-MX036S1E45FP4	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C50-□□1□-MX036S1E45FP4	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C70-□□1□-MX036S1E45FP4	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204S□-C40-□□1□-MX036S1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204S□-C50-□□1□-MX036S1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204S□-C70-□□1□-MX036S1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204S□-D10-□□1□-MX036S1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39

Without filter N
With filter F

55
53

EA
PA

Without battery 12
With battery 13

Without battery 14
With battery 15

B30(3m)
B50(5m)

Without brake 18
With brake 16

B30(3m)
B50(5m)

B70(7m)

C10(10m)

C15(15m)

C20(20m)

C30(30m)

C40(40m)

C50(50m)

B70(7m)

C10(10m)

C15(15m)


C20(20m)

C30(30m)





C40(40m)

C50(50m)

MX036S Outline dimension diagram(mm)

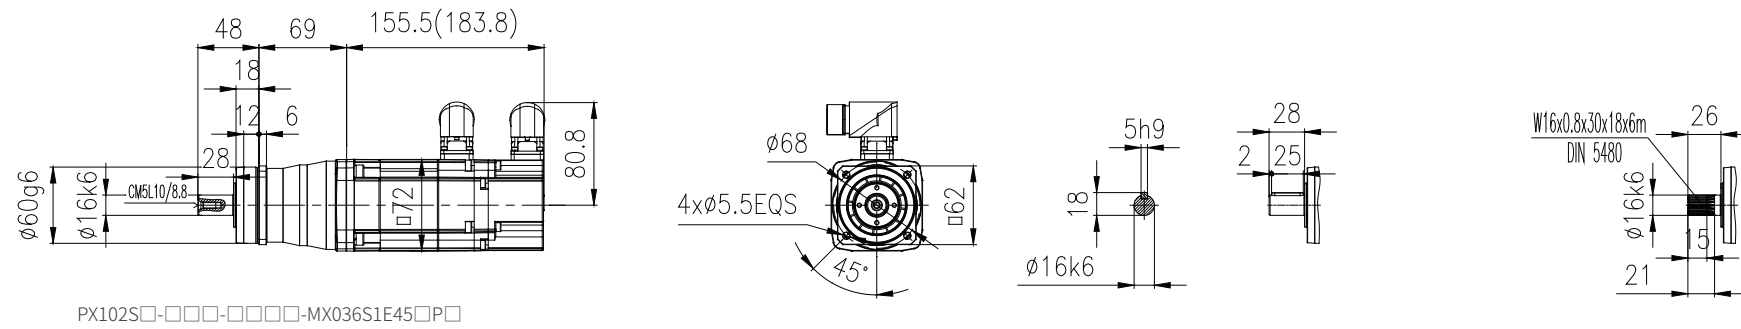

Outline dimension diagram of the equipped servo driver

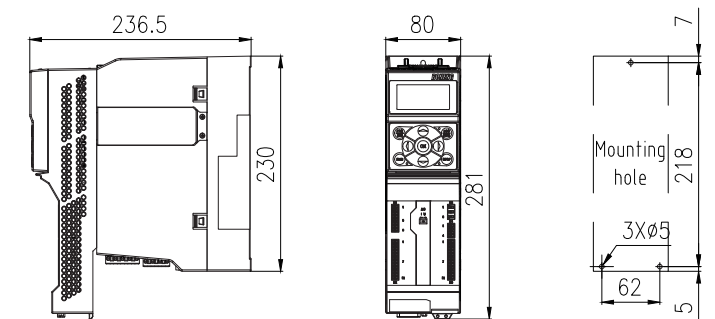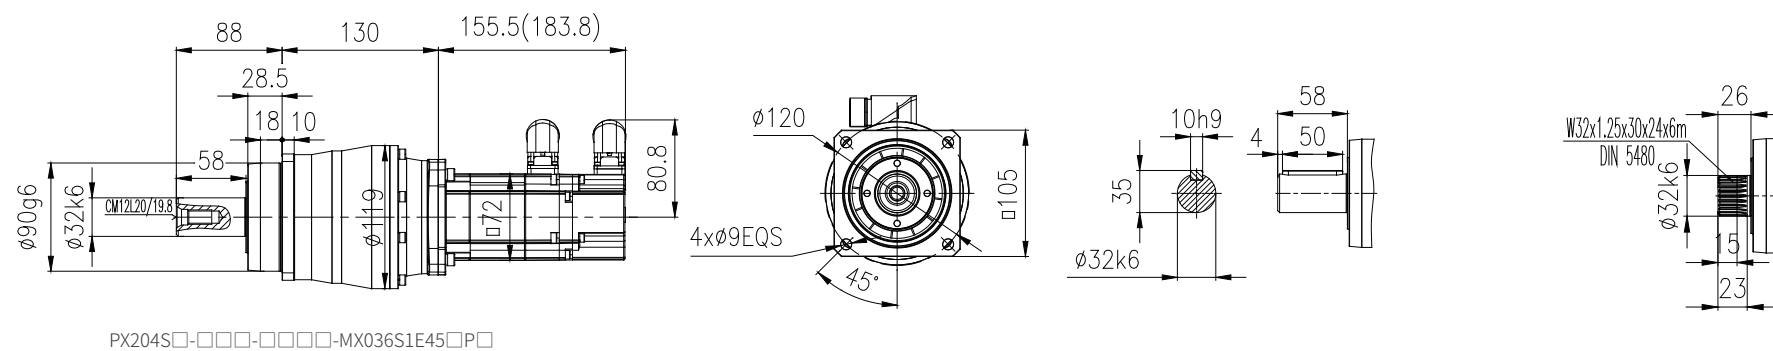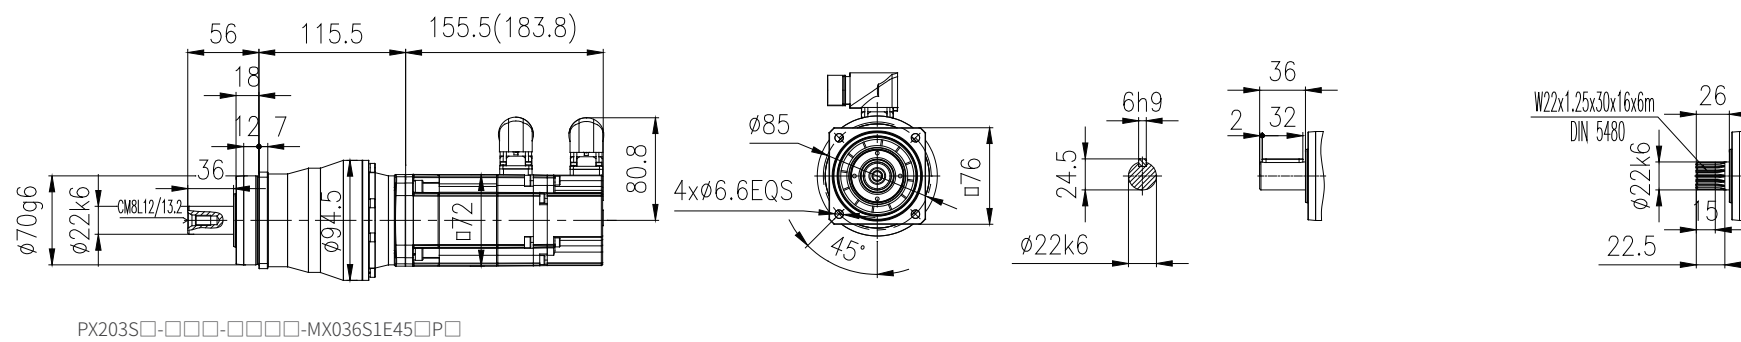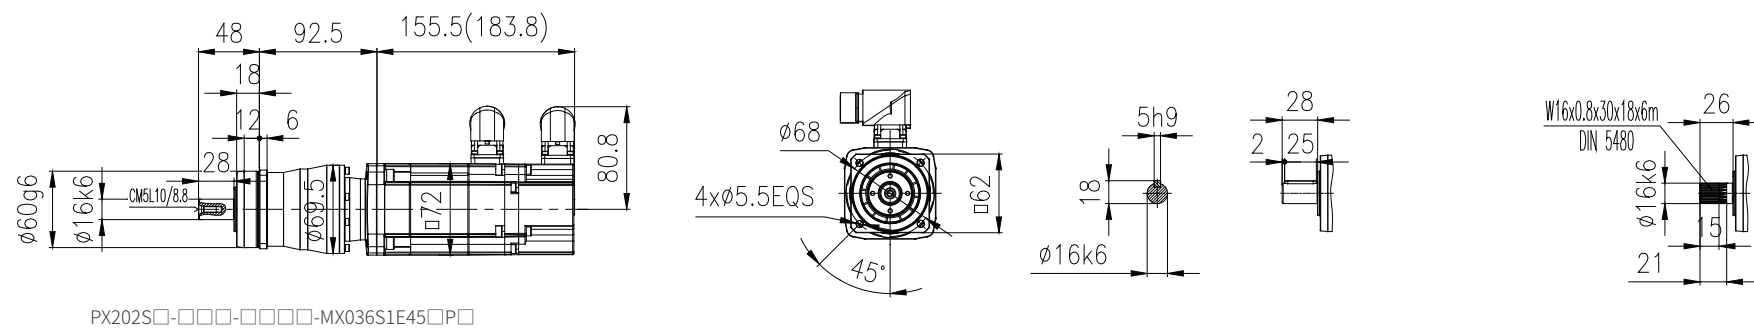

Control module: AX-CM55-PA-PE(ProfiNet) or
AX-CM55-EA-PE(EtherCAT)

Power module: AX-PM26-B3B15-N(Without filter) or
AX-PM26-B3B15-F(With filter)

Operator module: A1-OP25

注: () 为带制动器尺寸

Note: () is the size with brake.






伺服马达：0.8KW 1.7Nm
1.7A 4500r/min

Servo motor: 0.8KW 1.7Nm
1.7A 4500r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{20T} N.m	J_1 kgcm ²	J_t arcmin	f
1500	4.9	B30	3	3/1	22	40	55	100	1.58	4	4.45
1125	6.6	B40	4	4/1	28	52	70	110	1.5	4	4.25
900	8.2	B50	5	5/1	28	52	70	110	1.47	4	3.40
643	11.5	B70	7	7/1	28	52	70	110	1.44	4	2.43
450	16.5	C10	10	10/1	28	40	55	105	1.43	4	1.70
643	11.5	B70	7	7/1	85	140	185	255	1.53	3	7.37
450	16.5	C10	10	10/1	85	120	160	200	1.47	3	5.16
375	19.2	C12	12	12/1	88	110	110	200	1.53	4	4.59
281	25.6	C16	16	16/1	105	132	132	255	1.51	4	4.11
225	31.9	C20	20	20/1	105	132	132	255	1.48	4	3.29
180	39.9	C25	25	25/1	110	138	165	255	1.48	4	2.75
161	44.7	C28	28	28/1	105	132	132	255	1.44	4	2.35
150	47.9	C30	30	30/1	88	110	110	200	1.43	4	1.84
129	55.9	C35	35	35/1	110	138	165	255	1.44	4	1.97
113	63.9	C40	40	40/1	105	132	132	255	1.43	4	1.64
90	79.9	C50	50	50/1	110	138	165	255	1.43	4	1.38
161	44.7	C28	28	28/1	285	360	360	630	1.56	3	6.37
150	47.9	C30	30	30/1	215	270	270	515	1.5	3	4.49
129	55.9	C35	35	35/1	285	360	360	630	1.55	3	5.10
113	63.9	C40	40	40/1	285	360	360	630	1.49	3	4.46
90	79.9	C50	50	50/1	285	360	360	630	1.48	3	3.57
64	111.8	C70	70	70/1	285	360	360	630	1.48	3	2.55
45	159.7	D10	100	100/1	215	270	270	630	1.47	3	1.35

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
Planetary precision servo gearmotor oder number	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX102S□-B30-□□1□-MX036M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102S□-B40-□□1□-MX036M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102S□-B50-□□1□-MX036M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102S□-B70-□□1□-MX036M1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102S□-C10-□□1□-MX036M1E45FP3	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX103S□-B70-□□1□-MX036M1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX103S□-C10-□□1□-MX036M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C12-□□1□-MX036M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C16-□□1□-MX036M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C20-□□1□-MX036M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C25-□□1□-MX036M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C28-□□1□-MX036M1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C30-□□1□-MX036M1E45FP3	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C35-□□1□-MX036M1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C40-□□1□-MX036M1E45FP3	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203S□-C50-□□1□-MX036M1E45FP3	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204S□-C28-□□1□-MX036M1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204S□-C30-□□1□-MX036M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204S□-C35-□□1□-MX036M1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204S□-C40-□□1□-MX036M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204S□-C50-□□1□-MX036M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204S□-C70-□□1□-MX036M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204S□-D10-□□1□-MX036M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

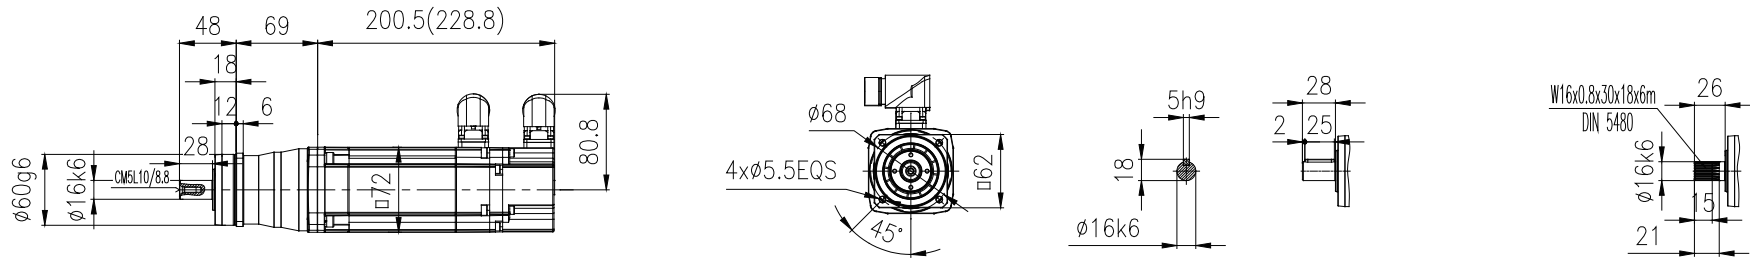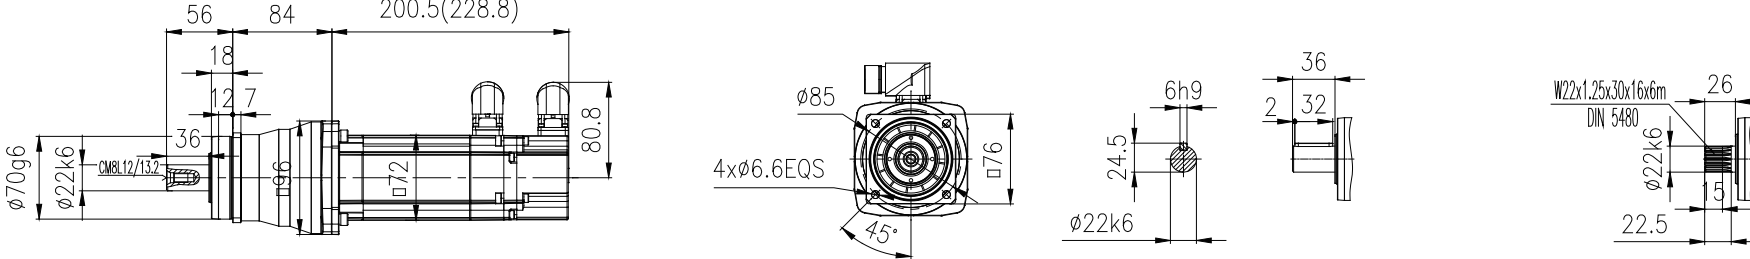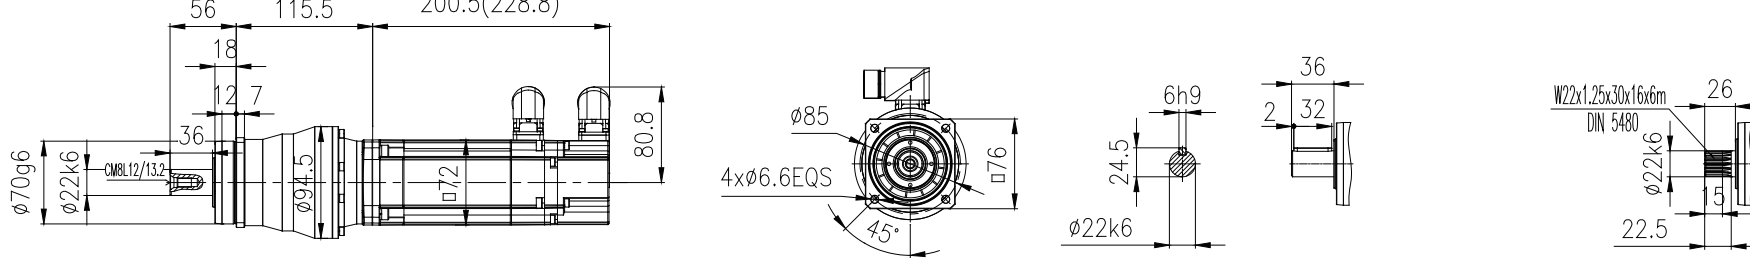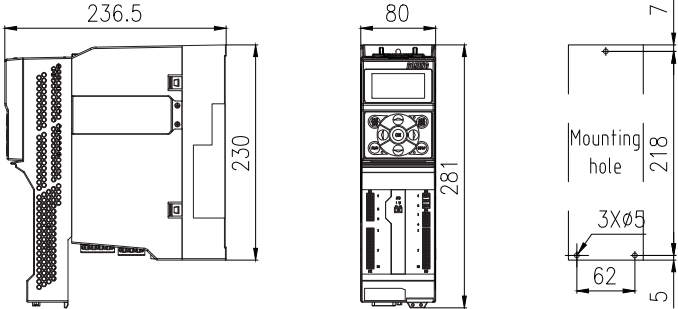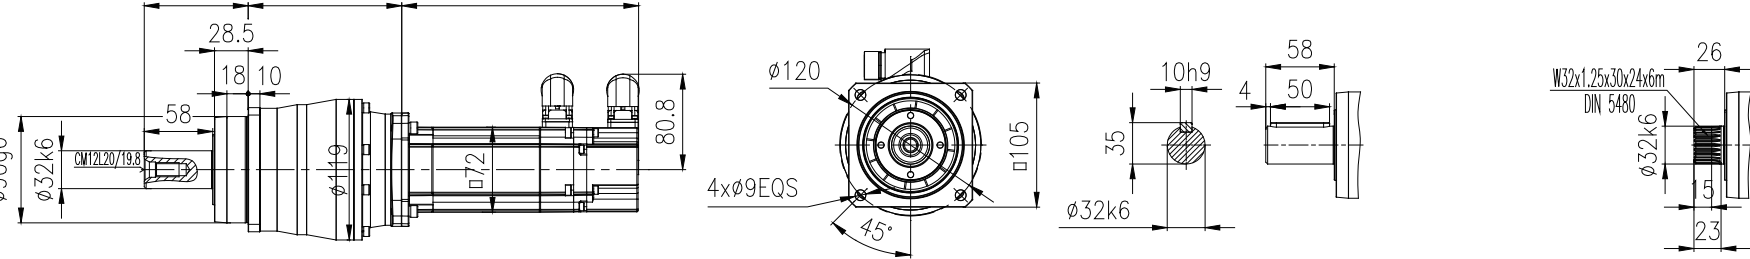MX036M Outline dimension diagram(mm)	Outline dimension diagram of the equipped servo driver
 PX102S□-□□□-□□□□-MX036M1E45□P□	
 PX103S□-□□□-□□□□-MX036M1E45□P□	
 PX203S□-□□□-□□□□-MX036M1E45□P□	 Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3B15-N(Without filter) or AX-PM26-B3B15-F(With filter) Operator module: A1-OP25
 PX204S□-□□□-□□□□-MX036M1E45□P□	

注： () 为带制动器尺寸

Note: () is the size with brake.







伺服马达：1.32KW 2.8Nm
2.8A 4500r/min

Servo motor: 1.32KW 2.8Nm
2.8A 4500r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox Output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox Maximum acceleration torque	Gearbox maximum torque	Gearbox Emergency stop torque	Gearbox rotational inertia	Gearbox Maximum return clearance	Gearbox Service factor
n _{2N} r/min	T ₂ N.m	Code	i	i _{ex}	T _{2N} N.m	T _{2B} N.m	T _{2a} N.m	T _{2NOT} N.m	J ₁ kgcm ²	J _t arcmin	f
1500	8.2	B30	3	3/1	22	40	55	100	2.7	4	2.70
1125	10.9	B40	4	4/4	28	52	70	110	2.62	4	2.58
900	13.6	B50	5	5/1	28	52	70	110	2.59	4	2.06
1500	8.2	B30	3	3/1	66	108	142	200	3.21	3	8.10
1125	10.9	B40	4	4/1	85	140	185	255	2.89	3	7.82
900	13.6	B50	5	5/1	85	140	185	255	2.76	3	6.26
643	19.0	B70	7	7/1	85	140	185	255	2.65	3	4.47
450	27.2	C10	10	10/1	85	120	160	200	2.59	3	3.13
375	31.6	C12	12	12/1	88	110	110	200	2.65	4	2.78
281	42.2	C16	16	16/1	105	132	132	255	2.63	4	2.49
225	52.7	C20	20	20/1	105	132	132	255	2.6	4	1.99
180	65.9	C25	25	25/1	110	138	165	255	2.6	4	1.67
375	31.6	C12	12	12/1	215	270	270	515	3.05	3	6.80
281	42.2	C16	16	16/1	250	360	360	630	2.97	3	5.93
225	52.7	C20	20	20/1	265	360	360	630	2.82	3	5.03
180	65.9	C25	25	25/1	265	360	360	630	2.8	3	4.02
161	73.8	C28	28	28/1	285	360	360	630	2.68	3	3.86
150	79.1	C30	30	30/1	215	270	270	515	2.62	3	2.72
129	92.3	C35	35	35/1	285	360	360	630	2.67	3	3.09
113	105.4	C40	40	40/1	285	360	360	630	2.61	3	2.70
90	131.8	C50	50	50/1	285	360	360	630	2.6	3	2.16
64	184.5	C70	70	70/1	285	360	360	630	2.6	3	1.54
161	73.8	C28	28	28/1	570	760	760	1350	3.07	2	7.72
150	79.1	C30	30	30/1	300	530	530	1250	2.83	2	3.79
129	92.3	C35	35	35/1	560	700	700	1350	3.03	2	6.07
113	105.4	C40	40	40/1	610	760	760	1350	2.8	2	5.79
90	131.8	C50	50	50/1	560	700	700	1350	2.78	2	4.25
64	184.5	C70	70	70/1	610	725	725	1350	2.77	2	3.31
45	263.6	D10	100	100/1	490	590	590	1250	2.76	2	1.86

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
Planetary precision servo gearmotor Oder number	Servo Drive Order Number			Servo Motor Cable Configuration Order Number		Servo Drive Braking Resistor Order Number
	Power module	Operator panel	Control module	Servo motor Signal line	Servo motor power line	
PX102S□-B30-□□1□-MX048S1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX102S□-B40-□□1□-MX048S1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX102S□-B50-□□1□-MX048S1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-B30-□□1□-MX048S1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-B40-□□1□-MX048S1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-B50-□□1□-MX048S1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-B70-□□1□-MX048S1E45FP3	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-C10-□□1□-MX048S1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203S□-C12-□□1□-MX048S1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203S□-C16-□□1□-MX048S1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203S□-C20-□□1□-MX048S1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203S□-C25-□□1□-MX048S1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C12-□□1□-MX048S1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C16-□□1□-MX048S1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C20-□□1□-MX048S1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C25-□□1□-MX048S1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C28-□□1□-MX048S1E45FP3	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C30-□□1□-MX048S1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C35-□□1□-MX048S1E45FP3	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C40-□□1□-MX048S1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C50-□□1□-MX048S1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C70-□□1□-MX048S1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C28-□□1□-MX048S1E45LP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C30-□□1□-MX048S1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C35-□□1□-MX048S1E45LP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C40-□□1□-MX048S1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C50-□□1□-MX048S1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C70-□□1□-MX048S1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-D10-□□1□-MX048S1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

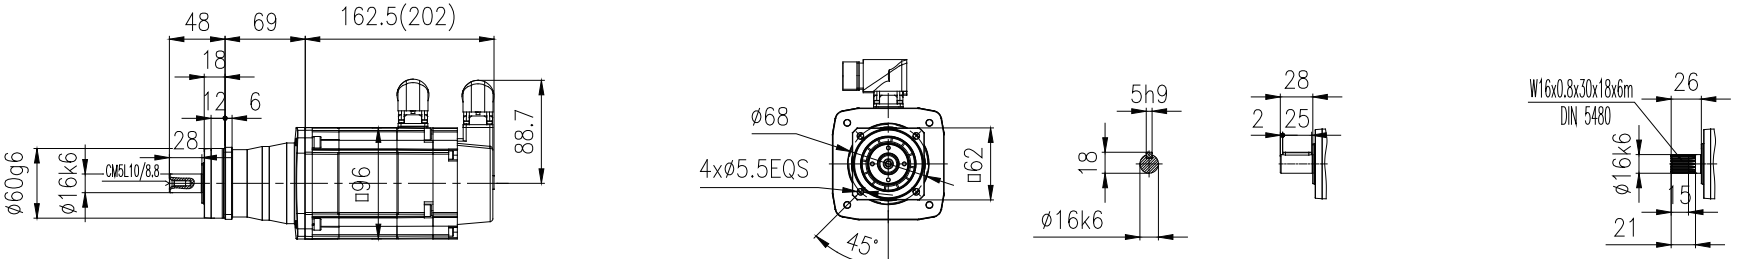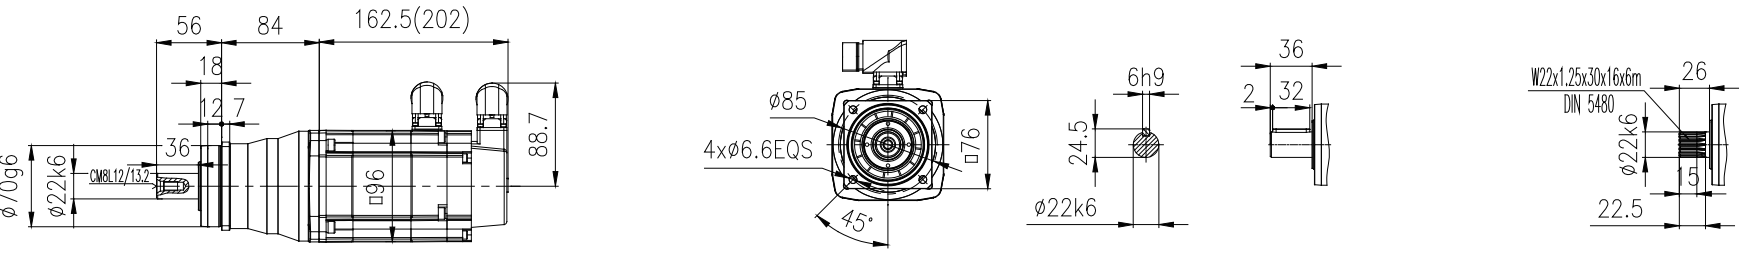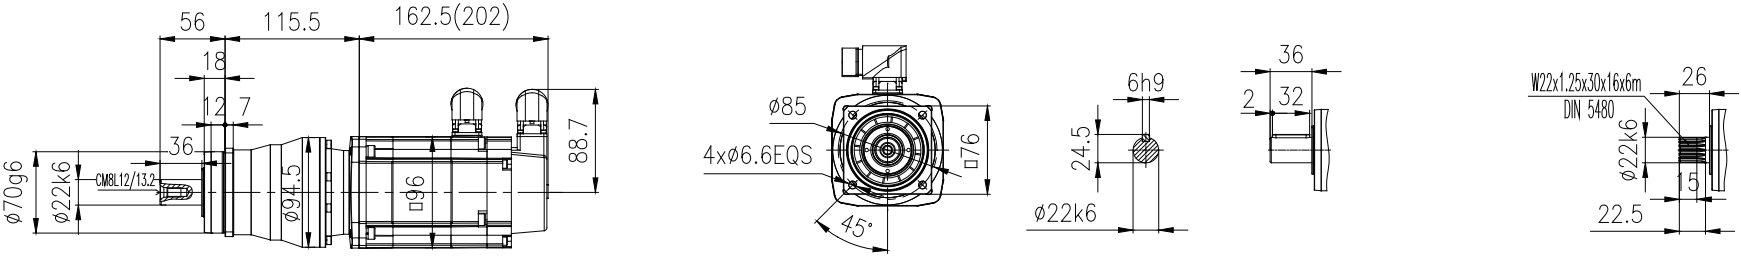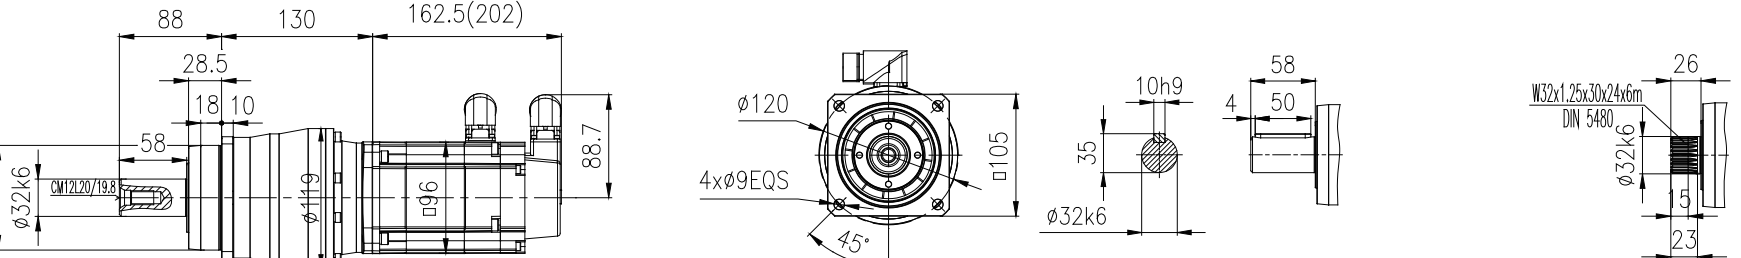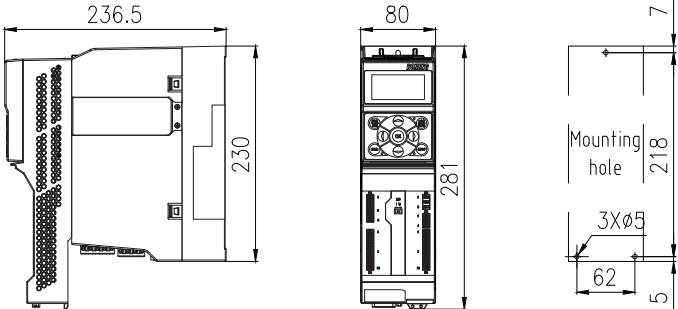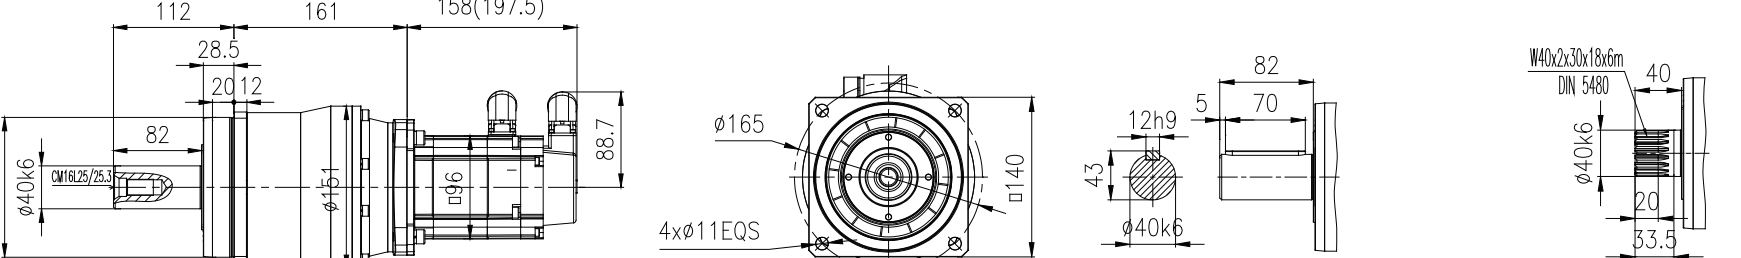MX048S Outline dimension diagram (mm)	Outline dimension diagram of the equipped servo driver
 PX102S□-□□□-□□□□-MX048S1E45□P□	
 PX103S□-□□□-□□□□-MX048S1E45□P□	
 PX203S□-□□□-□□□□-MX048S1E45□P□	
 PX204S□-□□□-□□□□-MX048S1E45□P□	 Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3B22-N(Without filter) or AX-PM26-B3B22-F(With filter) Operator module: A1-OP25
 PX205S□-□□□-□□□□-MX048S1E45□P□	

注： () 为带制动器尺寸

Note: () is the size with brake.







伺服马达：1.55KW 3.3Nm
3.3A 4500r/min

Servo motor: 1.55KW 3.3Nm
3.3A 4500r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
1500	9.6	B30	3	3/1	22	40	55	100	5.02	4	2.30
1125	12.8	B40	4	4/1	28	52	70	110	4.94	4	2.19
900	16.0	B50	5	5/1	28	52	70	110	4.91	4	1.76
1500	9.6	B30	3	3/1	66	108	142	200	5.53	3	6.89
1125	12.8	B40	4	4/1	85	140	185	255	5.21	3	6.66
900	16.0	B50	5	5/1	85	140	185	255	5.08	3	5.33
643	22.3	B70	7	7/1	85	140	185	255	4.97	3	3.81
450	31.9	C10	10	10/1	85	120	160	200	4.91	3	2.66
375	37.1	C12	12	12/1	88	110	110	200	4.97	4	2.37
281	49.5	C16	16	16/1	105	132	132	255	4.95	4	2.12
225	61.9	C20	20	20/1	105	132	132	255	4.92	4	1.70
180	77.4	C25	25	25/1	110	138	165	255	4.92	4	1.42
375	37.1	C12	12	12/1	215	270	270	515	5.37	3	5.79
281	49.5	C16	16	16/1	250	360	360	630	5.29	3	5.05
225	61.9	C20	20	20/1	265	360	360	630	5.14	3	4.28
180	77.4	C25	25	25/1	265	360	360	630	5.12	3	3.42
161	86.7	C28	28	28/1	285	360	360	630	5.1	3	3.29
150	92.9	C30	30	30/1	215	270	270	515	4.94	3	2.32
129	108.3	C35	35	35/1	285	360	360	630	4.99	3	2.63
113	123.8	C40	40	40/1	285	360	360	630	4.93	3	2.30
90	154.8	C50	50	50/1	285	360	360	630	4.92	3	1.84
64	216.7	C70	70	70/1	285	360	360	630	4.92	3	1.32
161	86.7	C28	28	28/1	570	760	760	1350	5.39	2	6.58
150	92.9	C30	30	30/1	300	530	530	1250	5.15	2	3.23
129	108.3	C35	35	35/1	560	700	700	1350	5.35	2	5.17
113	123.8	C40	40	40/1	610	760	760	1350	5.12	2	4.93
90	154.8	C50	50	50/1	560	700	700	1350	5.1	2	3.62
64	216.7	C70	70	70/1	610	725	725	1350	5.09	2	2.82
45	309.5	D10	100	100/1	490	590	590	1250	5.08	2	1.58

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
Planetary precision servo gearmotor oder number	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX102S□-B30-□□1□-MX048M1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX102S□-B40-□□1□-MX048M1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX102S□-B50-□□1□-MX048M1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-B30-□□1□-MX048M1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-B40-□□1□-MX048M1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-B50-□□1□-MX048M1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-B70-□□1□-MX048M1E45FP3	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-C10-□□1□-MX048M1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203S□-C12-□□1□-MX048M1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203S□-C16-□□1□-MX048M1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203S□-C20-□□1□-MX048M1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203S□-C25-□□1□-MX048M1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C12-□□1□-MX048M1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C16-□□1□-MX048M1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C20-□□1□-MX048M1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C25-□□1□-MX048M1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C28-□□1□-MX048M1E45FP3	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C30-□□1□-MX048M1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C35-□□1□-MX048M1E45FP3	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C40-□□1□-MX048M1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C50-□□1□-MX048M1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C70-□□1□-MX048M1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C28-□□1□-MX048M1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C30-□□1□-MX048M1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C35-□□1□-MX048M1E45LP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C40-□□1□-MX048M1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C50-□□1□-MX048M1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C70-□□1□-MX048M1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-D10-□□1□-MX048M1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

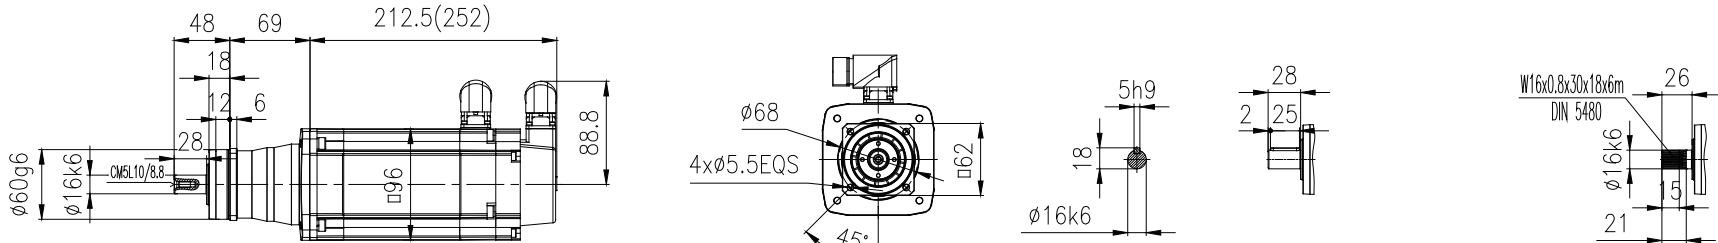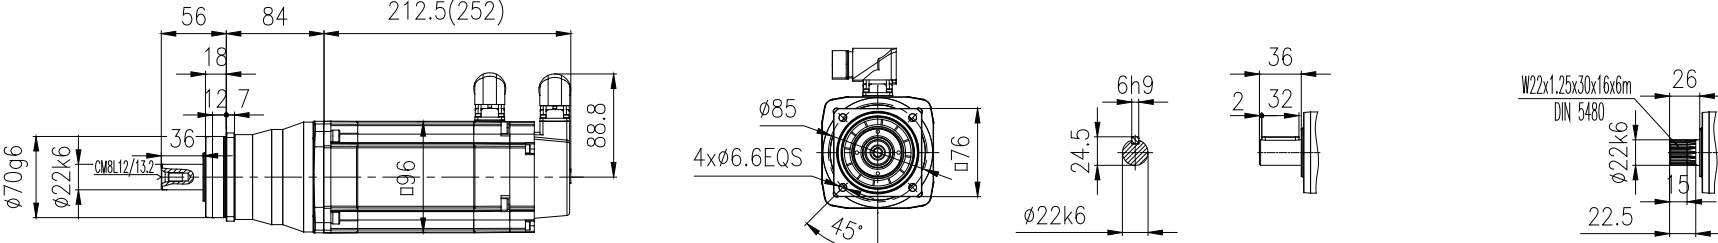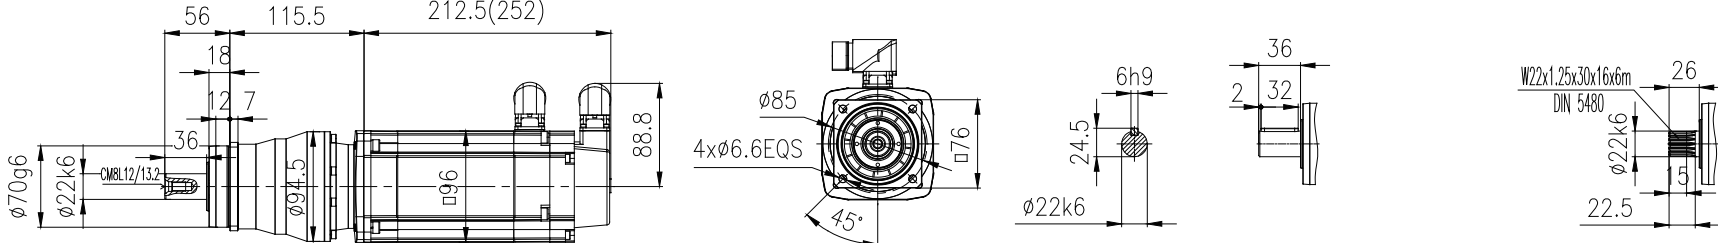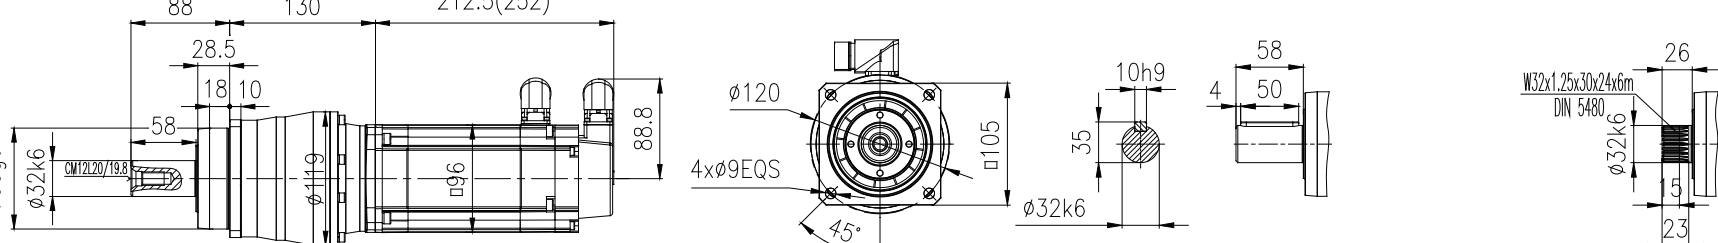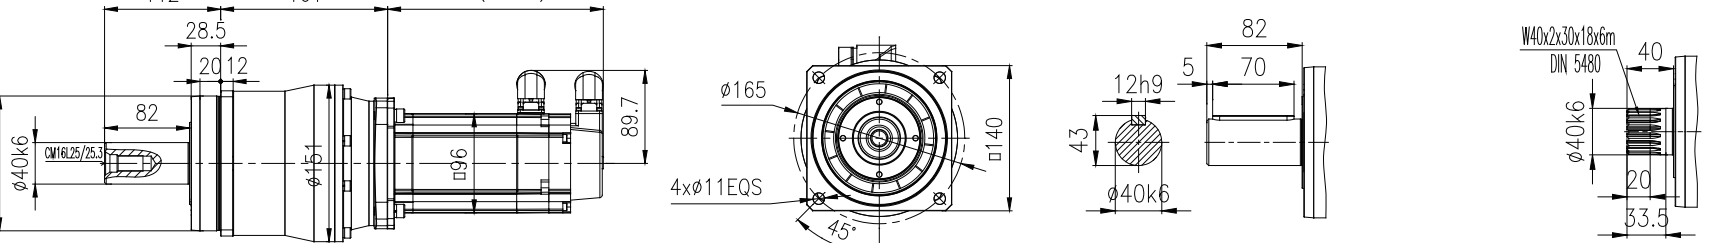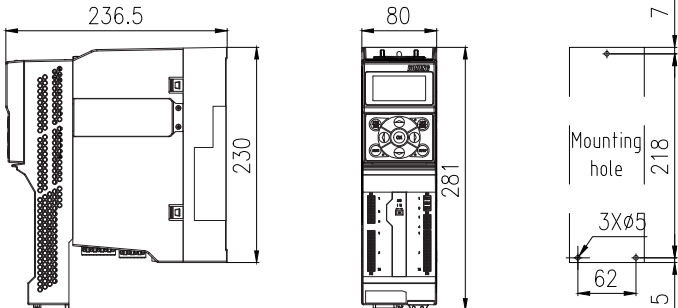MX048M Outline dimension diagram (mm)	Outline dimension diagram of the equipped servo driver
 PX102S□-□□□-□□□□-MX048M1E45□P□	
 PX103S□-□□□-□□□□-MX048M1E45□P□	
 PX203S□-□□□-□□□□-MX048M1E45□P□	
 PX204S□-□□□-□□□□-MX048M1E45□P□	
 PX205S□-□□□-□□□□-MX048M1E45□P□	 Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3B22-N(Without filter) or AX-PM26-B3B22-F(With filter) Operator module: A1-OP25

注：（）为带制动器尺寸

Note: () is the size with brake.







伺服马达：1.7KW 5.4Nm
3.6A 3000r/min

Servo motor: 1.7KW 5.4Nm
3.6A 3000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
1000	15.7	B30	3	3/1	66	108	142	200	8.04	3	4.19
750	21.0	B40	4	4/1	85	140	185	255	7.72	3	4.05
600	26.2	B50	5	5/1	85	140	185	255	7.59	3	3.24
429	36.7	B70	7	7/1	85	140	185	255	7.48	3	2.31
300	52.5	C10	10	10/1	85	120	160	200	7.42	3	1.62
1000	15.7	B30	3	3/1	138	290	390	515	10.05	2	8.76
750	21.0	B40	4	4/1	185	390	515	630	8.75	2	8.81
600	26.2	B50	5	5/1	185	390	515	630	8.26	2	7.05
429	36.7	B70	7	7/1	185	390	445	630	7.83	2	5.03
300	52.5	C10	10	10/1	185	290	390	630	7.6	2	3.52
250	61.1	C12	12	12/1	215	270	270	515	7.88	3	3.52
188	81.5	C16	16	16/1	250	360	360	630	7.8	3	3.07
150	101.8	C20	20	20/1	265	360	360	630	7.65	3	2.60
120	127.3	C25	25	25/1	265	360	360	630	7.63	3	2.08
107	142.6	C28	28	28/1	285	360	360	630	7.51	3	2.00
100	152.8	C30	30	30/1	215	270	270	515	7.45	3	1.41
86	178.2	C35	35	35/1	285	360	360	630	7.5	3	1.60
75	203.7	C40	40	40/1	285	360	360	630	7.44	3	1.40
60	254.6	C50	50	50/1	285	360	360	630	7.43	3	1.12
250	61.1	C12	12	12/1	300	530	530	1250	8.94	2	4.91
188	81.5	C16	16	16/1	480	760	760	1350	8.78	2	5.89
150	101.8	C20	20	20/1	515	760	760	1350	8.41	2	5.06
120	127.3	C25	25	25/1	515	700	700	1350	8.34	2	4.05
107	142.6	C28	28	28/1	570	760	760	1350	7.9	2	4.00
100	152.8	C30	30	30/1	300	530	530	1250	7.66	2	1.96
86	178.2	C35	35	35/1	560	700	700	1350	7.86	2	3.14
75	203.7	C40	40	40/1	610	760	760	1350	7.63	2	2.99
60	254.6	C50	50	50/1	560	700	700	1350	7.61	2	2.20
43	356.4	C70	70	70/1	610	725	725	1350	7.6	2	1.71
100	152.8	C30	30	30/1	730	1300	1300	2850	8.43	2	4.78
75	203.7	C40	40	40/1	1200	1600	1600	2850	8.29	2	5.89
60	254.6	C50	50	50/1	1200	1600	2000	2850	8.23	2	4.71
43	356.4	C70	70	70/1	1200	1500	1500	2850	8.18	2	3.37
30	509.2	D10	100	100/1	970	1300	1400	2850	8.16	2	1.91

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
Planetary precision servo gearmotor oder number	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX103S□-B30-□□1□-MX063S1E30FP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-B40-□□1□-MX063S1E30FP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-B50-□□1□-MX063S1E30FP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-B70-□□1□-MX063S1E30FP2	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103S□-C10-□□1□-MX063S1E30FP3	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX104S□-B30-□□1□-MX063S1E30FP4	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX104S□-B40-□□1□-MX063S1E30FP4	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX104S□-B50-□□1□-MX063S1E30FP4	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX104S□-B70-□□1□-MX063S1E30FP5	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX104S□-C10-□□1□-MX063S1E30FP6	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C12-□□1□-MX063S1E30FP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C16-□□1□-MX063S1E30FP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C20-□□1□-MX063S1E30FP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C25-□□1□-MX063S1E30FP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C28-□□1□-MX063S1E30FP2	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C30-□□1□-MX063S1E30FP3	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C35-□□1□-MX063S1E30FP2	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C40-□□1□-MX063S1E30FP3	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204S□-C50-□□1□-MX063S1E30FP3	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C12-□□1□-MX063S1E30FP4	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C16-□□1□-MX063S1E30FP4	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C20-□□1□-MX063S1E30FP4	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C25-□□1□-MX063S1E30FP4	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C28-□□1□-MX063S1E30FP5	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C30-□□1□-MX063S1E30FP6	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C35-□□1□-MX063S1E30FP5	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C40-□□1□-MX063S1E30FP6	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C50-□□1□-MX063S1E30FP6	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205S□-C70-□□1□-MX063S1E30FP6	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX206S□-C30-□□1□-MX063S1E30LP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX206S□-C40-□□1□-MX063S1E30LP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX206S□-C50-□□1□-MX063S1E30LP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX206S□-C70-□□1□-MX063S1E30LP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX206S□-D10-□□1□-MX063S1E30LP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

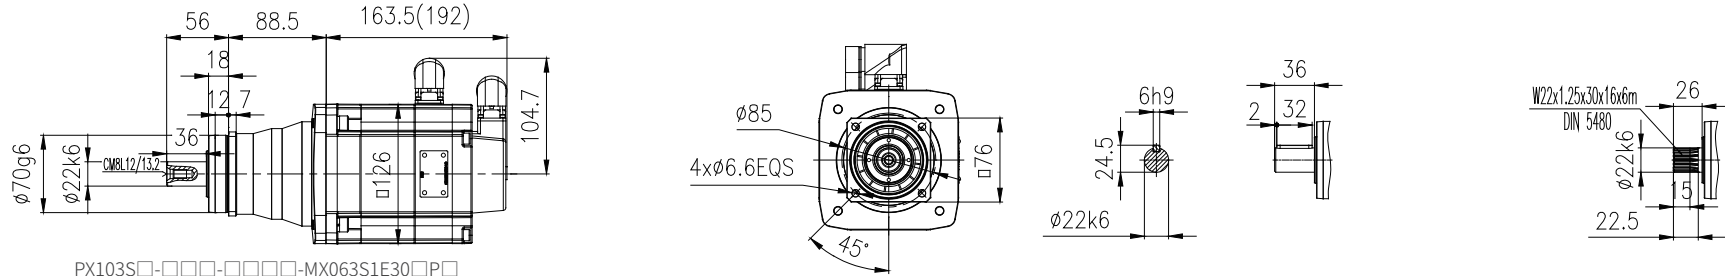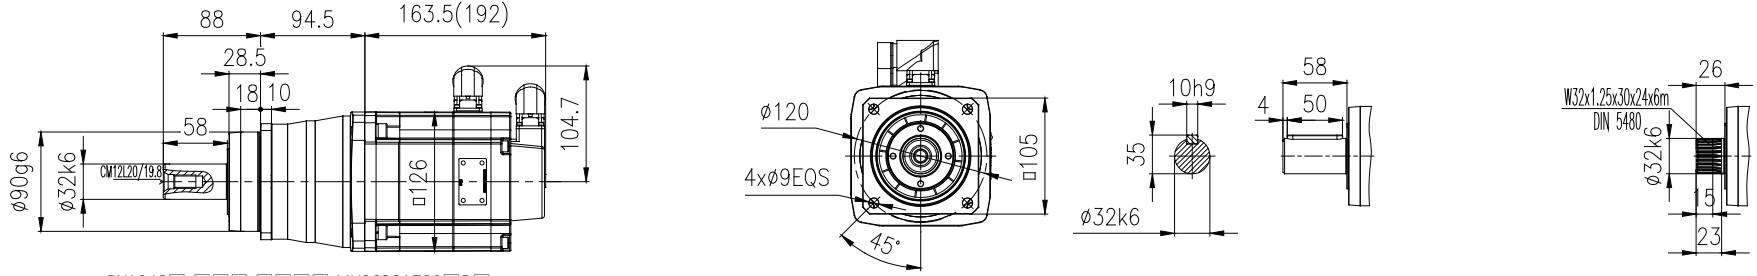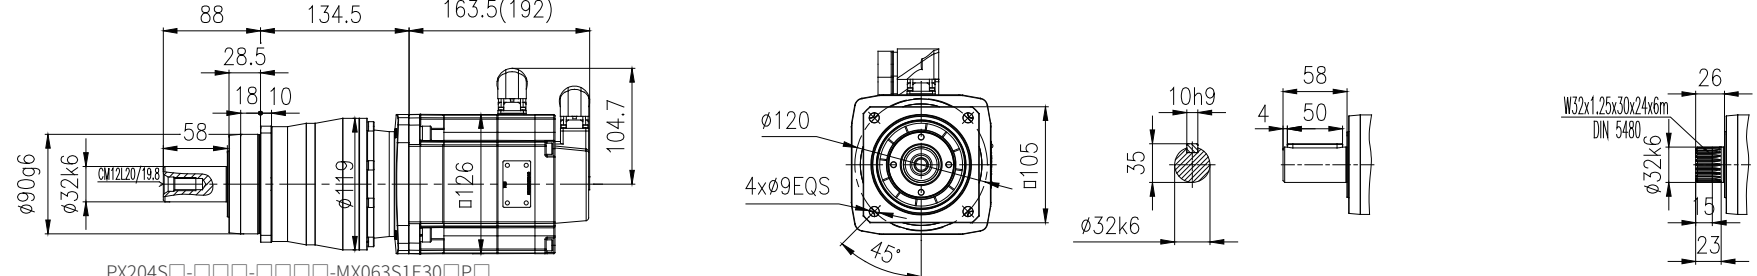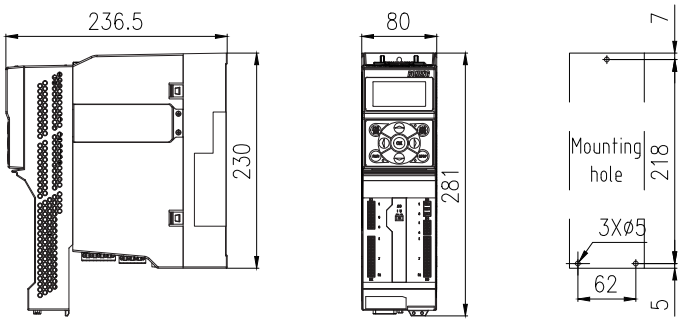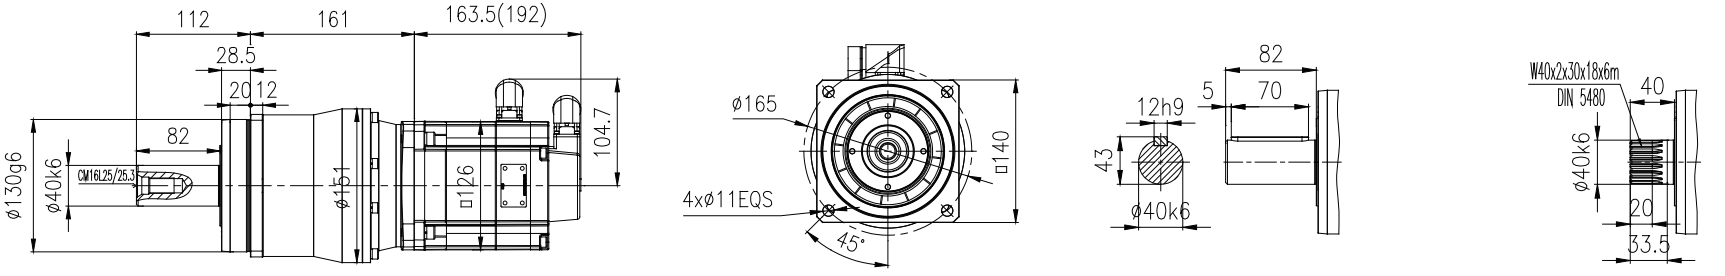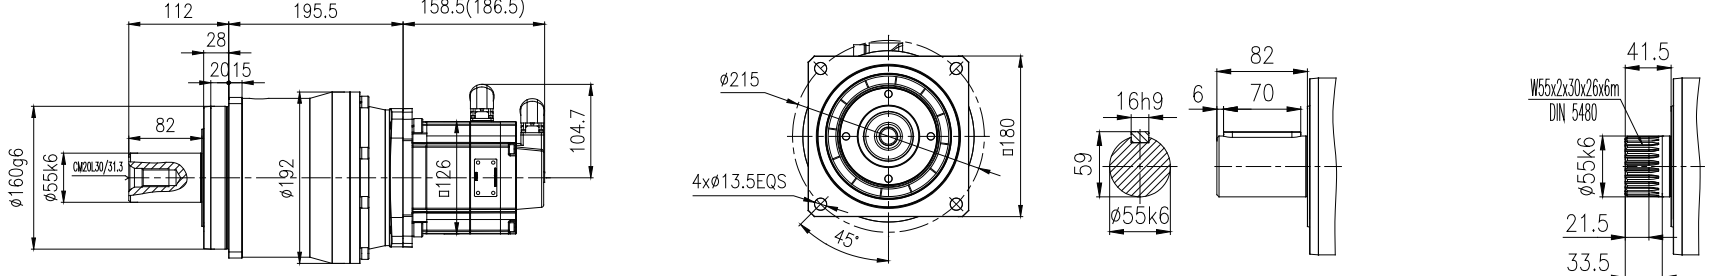MX063S Outline dimension diagram (mm)	Outline dimension diagram of the equipped servo driver
 PX103S□-□□□-□□□□-MX063S1E30□P□	
 PX104S□-□□□-□□□□-MX063S1E30□P□	
 PX204S□-□□□-□□□□-MX063S1E30□P□	 Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3B30-N(Without filter) or AX-PM26-B3B30-F(With filter) Operator module: A1-OP25
 PX205S□-□□□-□□□□-MX063S1E30□P□	
 PX206S□-□□□-□□□□-MX063S1E30□P□	

注： () 为带制动器尺寸

Note: () is the size with brake.

伺服马达：2.76KW 8.8Nm
6A 3000r/min


Servo motor: 2.76KW 8.8Nm
6A 3000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
1000	25.6	B30	3	3/1	66	108	142	200	14.77	3	2.58
750	34.1	B40	4	4/1	85	140	185	255	14.45	3	2.49
600	42.6	B50	5	5/1	85	140	185	255	14.32	3	1.99
1000	25.6	B30	3	3/1	138	290	390	515	16.78	2	5.40
750	34.1	B40	4	4/1	185	390	515	630	15.48	2	5.43
600	42.6	B50	5	5/1	185	390	515	630	14.99	2	4.34
429	59.7	B70	7	7/1	185	390	445	630	14.56	2	3.10
300	85.2	C10	10	10/1	185	290	390	630	14.33	2	2.17
250	99.2	C12	12	12/1	215	270	270	515	14.61	3	2.17
188	132.3	C16	16	16/1	250	360	360	630	14.53	3	1.89
150	165.3	C20	20	20/1	265	360	360	630	14.38	3	1.60
120	206.7	C25	25	25/1	265	360	360	630	14.36	3	1.28
429	57.9	B70	7	7/1	345	830	865	1350	15.84	2	5.96
300	85.2	C10	10	10/1	345	665	750	1250	14.98	2	4.05
250	99.2	C12	12	12/1	300	530	530	1250	15.67	2	3.02
188	132.3	C16	16	16/1	480	760	760	1350	15.51	2	3.63
150	165.3	C20	20	20/1	515	760	760	1350	15.14	2	3.11
120	206.7	C25	25	25/1	515	700	700	1350	15.07	2	2.49
107	231.5	C28	28	28/1	570	760	760	1350	14.63	2	2.46
100	248.0	C30	30	30/1	300	530	530	1250	14.39	2	1.21
86	289.3	C35	35	35/1	560	700	700	1350	14.59	2	1.94
75	330.7	C40	40	40/1	610	760	760	1350	14.36	2	1.84
60	413.3	C50	50	50/1	560	700	700	1350	14.34	2	1.35
43	578.7	C70	70	70/1	610	725	725	1350	14.33	2	1.05
107	231.5	C28	28	28/1	1200	1600	1600	2850	15.92	2	5.18
100	248.0	C30	30	30/1	730	1300	1300	2850	15.16	2	2.94
86	289.3	C35	35	35/1	1200	1600	2000	2850	15.81	2	4.15
75	330.7	C40	40	40/1	1200	1600	1600	2850	15.02	2	3.63
60	413.3	C50	50	50/1	1200	1600	2000	2850	14.96	2	2.90
43	578.7	C70	70	70/1	1200	1500	1500	2850	14.91	2	2.07
30	826.7	D10	100	100/1	970	1300	1400	2850	14.89	2	1.17


行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
Planetary precision servo gearmotor oder number	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX103S□-B30-□□1□-MX063M1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX103S□-B40-□□1□-MX063M1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX103S□-B50-□□1□-MX063M1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX104S□-B30-□□1□-MX063M1E30FP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX104S□-B40-□□1□-MX063M1E30FP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX104S□-B50-□□1□-MX063M1E30FP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX104S□-B70-□□1□-MX063M1E30FP3	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX104S□-C10-□□1□-MX063M1E30FP4	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX204S□-C12-□□1□-MX063M1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX204S□-C16-□□1□-MX063M1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX204S□-C20-□□1□-MX063M1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX204S□-C25-□□1□-MX063M1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX105S□-B70-□□1□-MX063M1E30LP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX105S□-C10-□□1□-MX063M1E30LP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205S□-C12-□□1□-MX063M1E30FP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205S□-C16-□□1□-MX063M1E30FP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205S□-C20-□□1□-MX063M1E30FP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205S□-C25-□□1□-MX063M1E30FP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205S□-C28-□□1□-MX063M1E30FP3	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205S□-C30-□□1□-MX063M1E30FP4	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205S□-C35-□□1□-MX063M1E30FP3	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205S□-C40-□□1□-MX063M1E30FP4	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205S□-C50-□□1□-MX063M1E30FP4	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX206S□-C28-□□1□-MX063M1E30LP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX206S□-C30-□□1□-MX063M1E30LP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX206S□-C35-□□1□-MX063M1E30LP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX206S□-C40-□□1□-MX063M1E30LP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX206S□-C50-□□1□-MX063M1E30LP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX206S□-C70-□□1□-MX063M1E30LP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX206S□-D10-□□1□-MX063M1E30LP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

Outline dimension diagram of the equipped servo driver

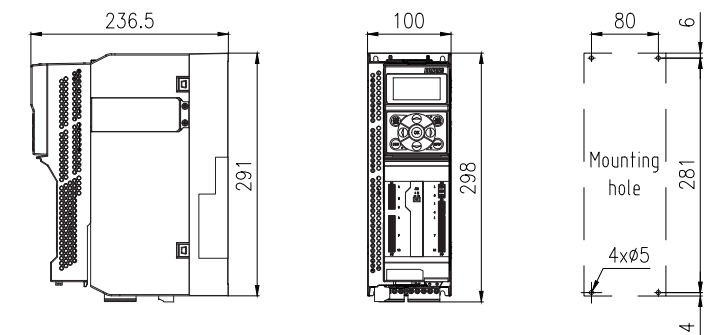

Control module: AX-CM55-PA-PE(ProfiNet) or
AX-CM55-EA-PE(EtherCAT)
Power module: AX-PM26-B3B55-N(Without filter) or
AX-PM26-B3B55-F(With filter)
Operator module: A1-OP25

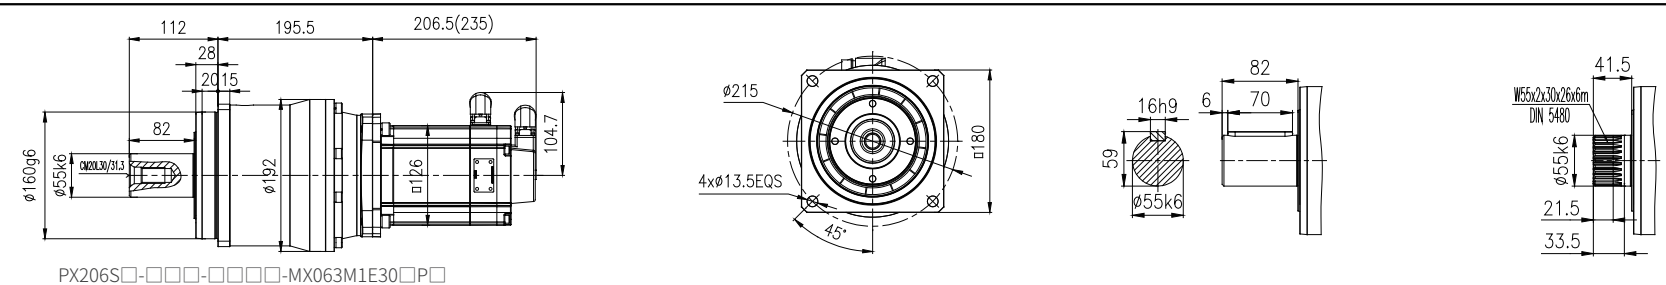

Note: () is the size with brake.

伺服马达：3.24KW 10.3Nm
7.1A 3000r/min







Servo motor: 3.24KW 10.3Nm
7.1A 3000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{200T} N.m	J_1 kgcm ²	J_t arcmin	f
1000	30.0	B30	3	3/1	138	290	390	515	28.18	2	4.60
750	40.0	B40	4	4/1	185	390	515	630	26.88	2	4.62
600	50.0	B50	5	5/1	185	390	515	630	26.39	2	3.70
429	70.0	B70	7	7/1	185	390	445	630	25.96	2	2.64
300	100.0	C10	10	10/1	185	290	390	630	25.73	2	1.85
1000	30.0	B30	3	3/1	220	500	650	1250	33.16	2	7.33
750	40.0	B40	4	4/1	355	830	1100	1350	30.69	2	8.87
600	50.0	B50	5	5/1	355	830	1100	1350	28.87	2	7.10
429	70.0	B70	7	7/1	345	830	865	1350	27.24	2	4.93
300	100.0	C10	10	10/1	345	665	750	1250	26.38	2	3.45
250	116.5	C12	12	12/1	300	530	530	1250	27.07	2	2.58
188	155.3	C16	16	16/1	480	760	760	1350	26.91	2	3.09
150	194.1	C20	20	20/1	515	760	760	1350	26.54	2	2.65
120	242.6	C25	25	25/1	515	700	700	1350	26.47	2	2.12
107	271.7	C28	28	28/1	570	760	760	1350	26.03	2	2.10
100	291.1	C30	30	30/1	300	530	530	1250	25.79	2	1.03
86	339.7	C35	35	35/1	560	700	700	1350	25.99	2	1.65
75	388.2	C40	40	40/1	610	760	760	1350	25.76	2	1.57
60	485.2	C50	50	50/1	560	700	700	1350	25.74	2	1.15
250	116.5	C12	12	12/1	730	1300	1300	2850	31.82	2	6.27
188	155.3	C16	16	16/1	1200	1600	1600	2850	30.94	2	7.73
150	194.1	C20	20	20/1	1200	1600	1600	2850	29.03	2	6.18
120	242.6	C25	25	25/1	1200	1600	2000	2850	28.81	2	4.95
107	271.7	C28	28	28/1	1200	1600	1600	2850	27.32	2	4.42
100	291.1	C30	30	30/1	730	1300	1300	2850	26.56	2	2.51
86	339.7	C35	35	35/1	1200	1600	2000	2850	27.21	2	3.53
75	388.2	C40	40	40/1	1200	1600	1600	2850	26.42	2	3.09
60	485.2	C50	50	50/1	1200	1600	2000	2850	26.36	2	2.47
43	679.3	C70	70	70/1	1200	1500	1500	2850	26.31	2	1.77
30	970.4	D10	100	100/1	970	1300	1400	2850	26.29	2	1.00
107	271.7	C28	28	28/1	1900	3000	3200	5550	30.5	2	6.99
100	291.1	C30	30	30/1	1500	1900	2100	5550	28.31	2	5.15
86	339.7	C35	35	35/1	1900	3000	3900	5550	30.27	2	5.59
75	388.2	C40	40	40/1	1900	3000	3000	5550	27.89	2	4.89
60	485.2	C50	50	50/1	1900	3000	3700	5550	27.92	2	3.92
43	679.3	C70	70	70/1	1700	2600	2600	5550	27.82	2	2.50
30	970.4	D10	100	100/1	1700	2200	2200	5550	27.77	2	1.75

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
Planetary precision servo gearmotor oder number	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX104S□-B30-□□1□-MX080S1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX104S□-B40-□□1□-MX080S1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX104S□-B50-□□1□-MX080S1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX104S□-B70-□□1□-MX080S1E30FP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX104S□-C10-□□1□-MX080S1E30FP3	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX105S□-B30-□□1□-MX080S1E30FP4	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX105S□-B40-□□1□-MX080S1E30FP4	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX105S□-B50-□□1□-MX080S1E30FP4	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX105S□-B70-□□1□-MX080S1E30FP5	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX105S□-C10-□□1□-MX080S1E30FP6	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205S□-C12-□□1□-MX080S1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205S□-C16-□□1□-MX080S1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205S□-C20-□□1□-MX080S1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205S□-C25-□□1□-MX080S1E30FP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205S□-C28-□□1□-MX080S1E30FP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205S□-C30-□□1□-MX080S1E30FP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205S□-C35-□□1□-MX080S1E30FP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205S□-C40-□□1□-MX080S1E30FP3	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205S□-C50-□□1□-MX080S1E30FP3	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX206S□-C12-□□1□-MX080S1E30FP4	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX206S□-C16-□□1□-MX080S1E30FP4	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX206S□-C20-□□1□-MX080S1E30FP4	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX206S□-C25-□□1□-MX080S1E30FP4	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX206S□-C28-□□1□-MX080S1E30FP5	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX206S□-C30-□□1□-MX080S1E30FP6	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX206S□-C35-□□1□-MX080S1E30FP5	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX206S□-C40-□□1□-MX080S1E30FP6	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX206S□-C50-□□1□-MX080S1E30FP6	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX206S□-C70-□□1□-MX080S1E30FP6	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX206S□-D10-□□1□-MX080S1E30FP6	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX207S□-C28-□□1□-MX080S1E30LP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX207S□-C30-□□1□-MX080S1E30LP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX207S□-C35-□□1□-MX080S1E30LP1	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX207S□-C40-□□1□-MX080S1E30LP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX207S□-C50-□□1□-MX080S1E30LP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX207S□-C70-□□1□-MX080S1E30LP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX207S□-D10-□□1□-MX080S1E30LP2	AX-PM26-B3B55-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

Outline dimension diagram of the equipped servo driver

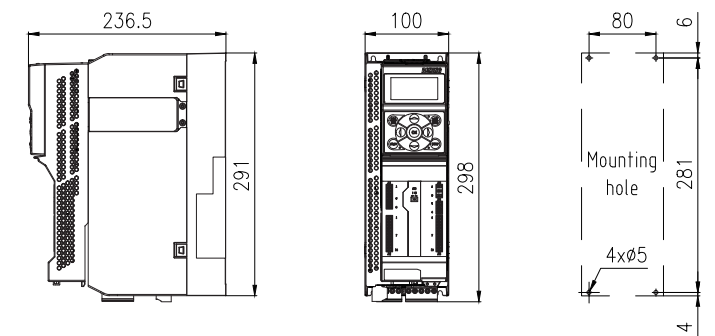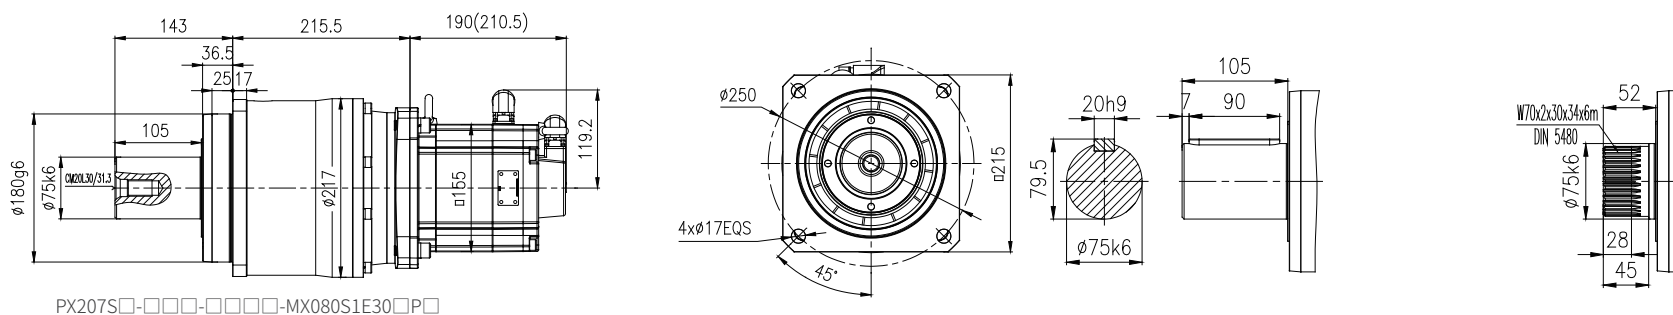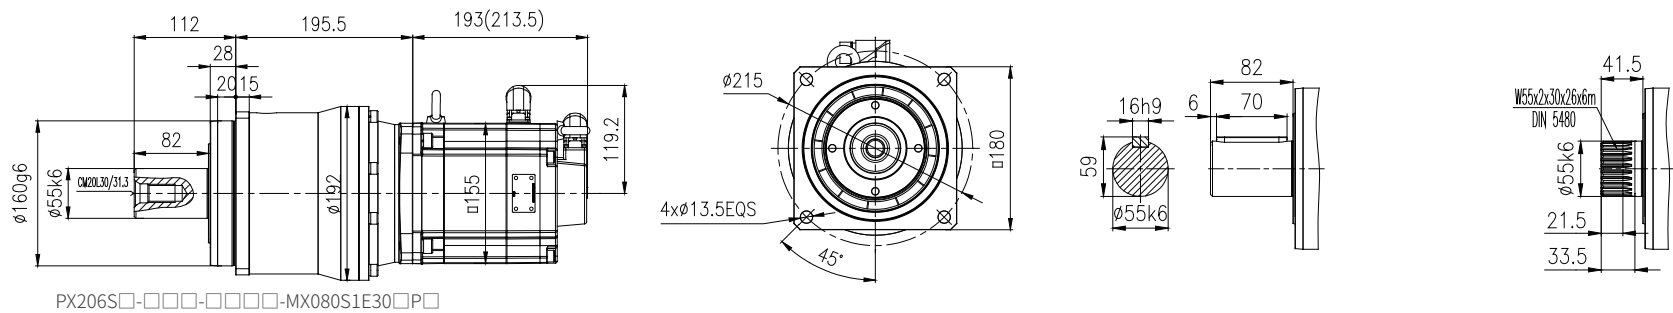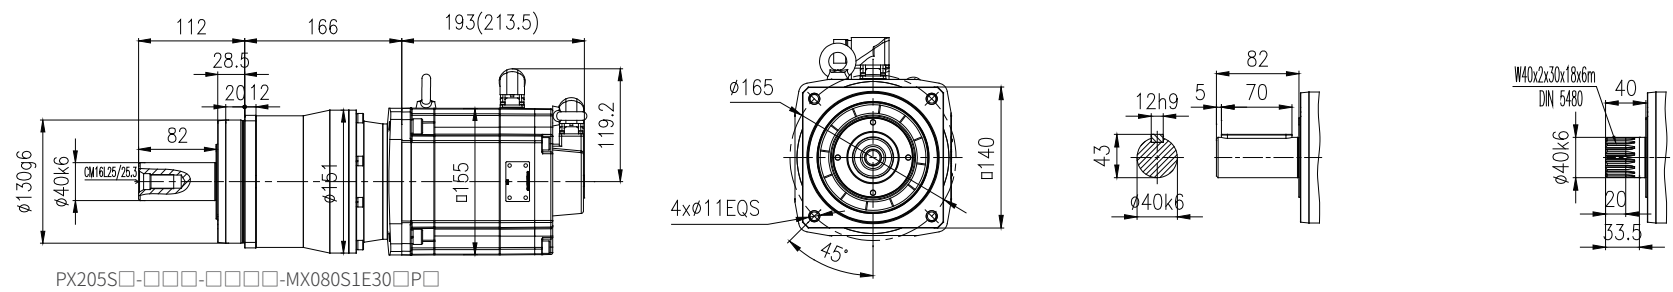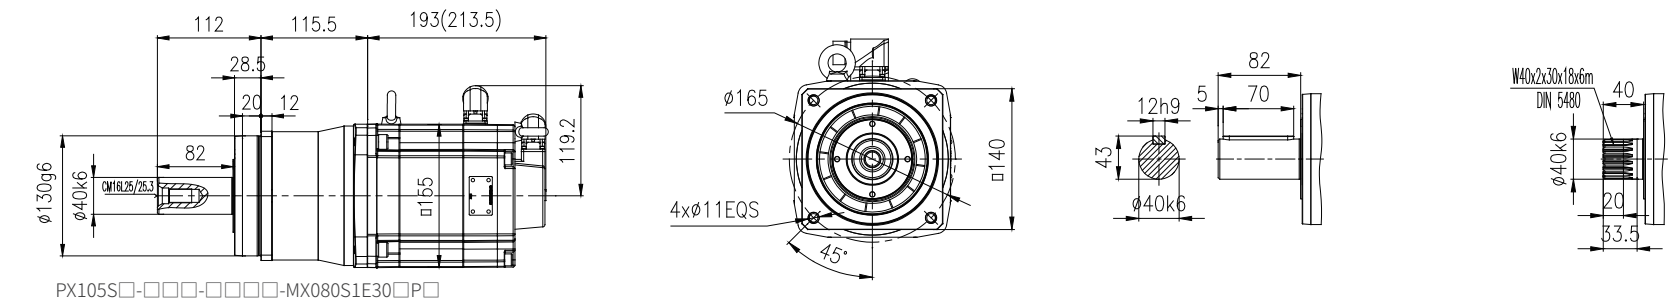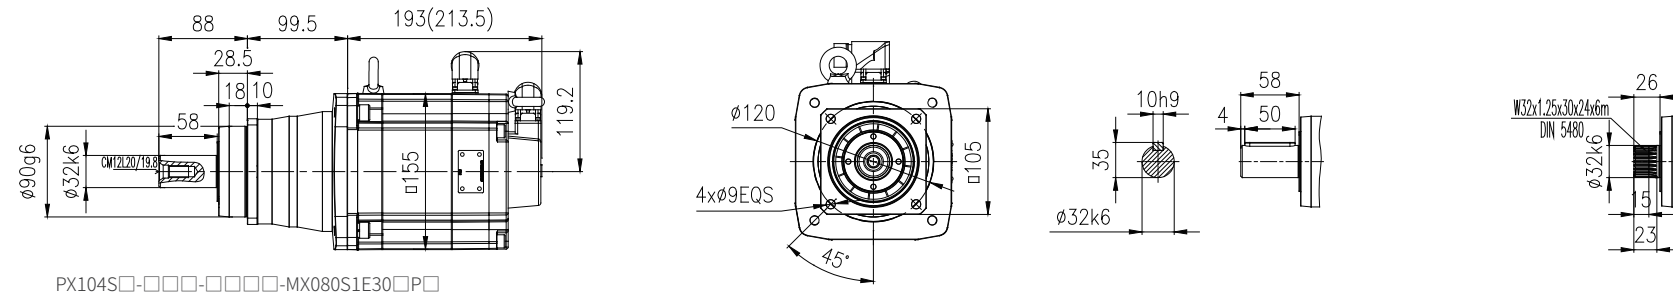

Control module: AX-CM55-PA-PE(ProfiNet) or
AX-CM55-EA-PE(EtherCAT)
Power module: AX-PM26-B3B55-N(Without filter) or
AX-PM26-B3B55-F(With filter)
Operator module: A1-OP25

注：（）为带制动器尺寸

Note: () is the size with brake.

伺服马达: 5.03KW 16Nm
9.6A 3000r/min

Servo motor: 5.03KW 16Nm
9.6A 3000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
$\frac{n_{2N}}{r/min}$	$\frac{2}{N.m}$	Code	i	i_{ex}	$\frac{T_{2N}}{N.m}$	$\frac{T_{2B}}{N.m}$	$\frac{T_{2a}}{N.m}$	$\frac{T_{2NOT}}{N.m}$	$\frac{J_1}{kgcm^2}$	$\frac{J_t}{arcmin}$	f
1000	46.6	B30	3	3/1	138	290	390	515	51.58	2	2.96
750	62.1	B40	4	4/1	185	390	515	630	50.28	2	2.98
600	77.7	B50	5	5/1	185	390	515	630	49.79	2	2.38
429	108.7	B70	7	7/1	185	390	445	630	49.36	2	1.70
1000	46.6	B30	3	3/1	220	500	650	1250	56.56	2	4.72
750	62.1	B40	4	4/1	355	830	1100	1350	54.09	2	5.71
600	77.7	B50	5	5/1	355	830	1100	1350	52.27	2	4.57
429	108.7	B70	7	7/1	345	830	865	1350	50.64	2	3.17
300	155.3	C10	10	10/1	345	665	750	1250	49.78	2	2.22
250	180.8	C12	12	12/1	300	530	530	1250	50.47	2	1.66
188	241.1	C16	16	16/1	480	760	760	1350	50.31	2	1.99
150	301.3	C20	20	20/1	515	760	760	1350	49.94	2	1.71
120	376.6	C25	25	25/1	515	700	700	1350	49.87	2	1.37
107	421.8	C28	28	28/1	570	760	760	1350	49.43	2	1.35
86	527.3	C35	35	35/1	560	700	700	1350	49.39	2	1.06
1000	45.2	B30	3	3/1	580	1200	1600	2600	78.64	2	12.83
750	60.3	B40	4	4/1	950	1525	2030	2800	64.48	2	15.76
600	75.3	B50	5	5/1	965	1525	2030	2800	58.99	2	12.81
429	105.5	B70	7	7/1	925	1525	2030	2800	54.14	2	8.77
300	150.7	C10	10	10/1	900	1200	1600	2600	51.55	2	5.97
250	180.8	C12	12	12/1	730	1300	1300	2850	55.22	2	4.04
188	241.1	C16	16	16/1	1200	1600	1600	2850	54.34	2	4.98
150	301.3	C20	20	20/1	1200	1600	1600	2850	52.43	2	3.98
120	376.6	C25	25	25/1	1200	1600	2000	2850	52.21	2	3.19
107	421.8	C28	28	28/1	1200	1600	1600	2850	50.72	2	2.84
100	452.0	C30	30	30/1	730	1300	1300	2850	49.96	2	1.62
86	527.3	C35	35	35/1	1200	1600	2000	2850	50.61	2	2.28
75	602.6	C40	40	40/1	1200	1600	1600	2850	49.82	2	1.99
60	753.3	C50	50	50/1	1200	1600	2000	2850	49.76	2	1.59
43	1054.6	C70	70	70/1	1200	1500	1500	2850	49.71	2	1.14
250	180.8	C12	12	12/1	1500	1900	2100	5550	65.47	2	8.30
188	241.1	C16	16	16/1	1900	3000	3200	5550	63.71	2	7.88
150	301.3	C20	20	20/1	1900	3100	3200	5550	58.51	2	6.31
120	376.6	C25	25	25/1	1900	3100	3900	5550	58.07	2	5.04
107	421.8	C28	28	28/1	1900	3000	3200	5550	53.9	2	4.50
100	452.0	C30	30	30/1	1500	1900	2100	5550	51.71	2	3.32
86	527.3	C35	35	35/1	1900	3000	3900	5550	53.67	2	3.60
75	602.6	C40	40	40/1	1900	3000	3000	5550	51.43	2	3.15
60	753.3	C50	50	50/1	1900	3000	3700	5550	51.32	2	2.52
43	1054.6	C70	70	70/1	1700	2600	2600	5550	51.22	2	1.61
30	1506.6	D10	100	100/1	1700	2200	2200	5550	51.17	2	1.13

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
Planetary precision servo gearmotor oder number	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX104S□-B30-□□1□-MX080M1E30FP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX104S□-B40-□□1□-MX080M1E30FP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX104S□-B50-□□1□-MX080M1E30FP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX104S□-B70-□□1□-MX080M1E30FP2	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX105S□-B30-□□1□-MX080M1E30FP3	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX105S□-B40-□□1□-MX080M1E30FP3	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX105S□-B50-□□1□-MX080M1E30FP3	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX105S□-B70-□□1□-MX080M1E30FP4	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX105S□-C10-□□1□-MX080M1E30FP5	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX205S□-C12-□□1□-MX080M1E30FP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX205S□-C16-□□1□-MX080M1E30FP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX205S□-C20-□□1□-MX080M1E30FP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX205S□-C25-□□1□-MX080M1E30FP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX205S□-C28-□□1□-MX080M1E30FP2	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX205S□-C35-□□1□-MX080M1E30FP2	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX106S□-B30-□□1□-MX080M1E30LP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX106S□-B40-□□1□-MX080M1E30LP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX106S□-B50-□□1□-MX080M1E30LP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX106S□-B70-□□1□-MX080M1E30LP2	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX106S□-C10-□□1□-MX080M1E30LP3	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX206S□-C12-□□1□-MX080M1E30FP3	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX206S□-C16-□□1□-MX080M1E30FP3	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX206S□-C20-□□1□-MX080M1E30FP3	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX206S□-C25-□□1□-MX080M1E30FP3	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX206S□-C28-□□1□-MX080M1E30FP4	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX206S□-C30-□□1□-MX080M1E30FP5	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX206S□-C35-□□1□-MX080M1E30FP4	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX206S□-C40-□□1□-MX080M1E30FP5	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX206S□-C50-□□1□-MX080M1E30FP5	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX206S□-C70-□□1□-MX080M1E30FP5	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207S□-C12-□□1□-MX080M1E30LP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207S□-C16-□□1□-MX080M1E30LP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207S□-C20-□□1□-MX080M1E30LP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207S□-C25-□□1□-MX080M1E30LP1	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207S□-C28-□□1□-MX080M1E30LP2	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207S□-C30-□□1□-MX080M1E30LP3	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207S□-C35-□□1□-MX080M1E30LP2	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207S□-C40-□□1□-MX080M1E30LP3	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207S□-C50-□□1□-MX080M1E30LP3	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207S□-C70-□□1□-MX080M1E30LP3	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207S□-D10-□□1□-MX080M1E30LP3	AX-PM26-B3B75-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

MX080M Outline dimension diagram (mm)				Outline dimension diagram of the equipped servo driver	
				Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3B75-N(Without filter) or AX-PM26-B3B75-F(With filter) Operator module: A1-OP25	

注：（）为带制动器尺寸

Note: () is the size with brake.






伺服马达：5.03KW 24Nm
10.1A 2000r/min

Servo motor: 5.03KW 24Nm
10.1A 2000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
n _{2N} r/min	T ₂ N.m	Code	i	i _{ex}	T _{2N} N.m	T _{2B} N.m	T _{2a} N.m	T _{2NOT} N.m	J ₁ kgcm ²	J _t arcmin	f
667	69.9	B30	3	3/1	220	500	650	1250	95.16	2	3.15
500	93.2	B40	4	4/1	355	830	1100	1350	92.69	2	3.81
400	116.5	B50	5	5/1	355	830	1100	1350	90.87	2	3.05
286	163.1	B70	7	7/1	345	830	865	1350	89.24	2	2.12
200	233.0	C10	10	10/1	345	665	750	1250	88.38	2	1.48
667	69.9	B30	3	3/1	580	1200	1600	2600	117.24	2	8.30
500	93.2	B40	4	4/1	950	1525	2030	2800	103.08	2	10.19
400	116.5	B50	5	5/1	965	1525	2030	2800	97.59	2	8.28
286	163.1	B70	7	7/1	925	1525	2030	2800	92.74	2	5.67
200	233.0	C10	10	10/1	900	1200	1600	2600	90.15	2	3.86
167	271.2	C12	12	12/1	730	1300	1300	2850	93.82	2	2.69
125	361.6	C16	16	16/1	1200	1600	1600	2850	92.94	2	3.32
100	452.0	C20	20	20/1	1200	1600	1600	2850	91.03	2	2.66
80	565.0	C25	25	25/1	1200	1600	2000	2850	90.8	2	2.12
71	632.8	C28	28	28/1	1200	1600	1600	2850	89.32	2	1.90
67	678.0	C30	30	30/1	730	1300	1300	2850	88.56	2	1.08
57	791.0	C35	35	35/1	1200	1600	2000	2850	89.21	2	1.52
50	904.0	C40	40	40/1	1200	1600	1600	2850	88.42	2	1.33
40	1129.9	C50	50	50/1	1200	1600	2000	2850	88.36	2	1.06
167	271.2	C12	12	12/1	1500	1900	2100	5550	104.07	2	5.53
125	361.6	C16	16	16/1	1900	3000	3200	5550	102.31	2	5.25
100	452.0	C20	20	20/1	1900	3100	3200	5550	97.11	2	4.20
80	565.0	C25	25	25/1	1900	3100	3900	5550	96.67	2	3.36
71	632.8	C28	28	28/1	1900	3000	3200	5550	92.5	2	3.00
67	678.0	C30	30	30/1	1500	1900	2100	5550	90.31	2	2.21
57	791.0	C35	35	35/1	1900	3000	3900	5550	92.27	2	2.40
50	904.0	C40	40	40/1	1900	3000	3000	5550	90.03	2	2.10
40	1129.9	C50	50	50/1	1900	3000	3700	5550	89.92	2	1.68
29	1581.9	C70	70	70/1	1700	2600	2600	5550	89.82	2	1.07

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
Planetary precision servo gearmotor oder number	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX105S□-B30-□□1□-MX100S1E20FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX105S□-B40-□□1□-MX100S1E20FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX105S□-B50-□□1□-MX100S1E20FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX105S□-B70-□□1□-MX100S1E20FP2	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX105S□-C10-□□1□-MX100S1E20FP3	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX106S□-B30-□□1□-MX100S1E20FP4	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX106S□-B40-□□1□-MX100S1E20FP4	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX106S□-B50-□□1□-MX100S1E20FP4	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX106S□-B70-□□1□-MX100S1E20FP5	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX106S□-C10-□□1□-MX100S1E20FP6	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX206S□-C12-□□1□-MX100S1E20FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX206S□-C16-□□1□-MX100S1E20FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX206S□-C20-□□1□-MX100S1E20FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX206S□-C25-□□1□-MX100S1E20FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX206S□-C28-□□1□-MX100S1E20FP2	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX206S□-C30-□□1□-MX100S1E20FP3	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX206S□-C35-□□1□-MX100S1E20FP2	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX206S□-C40-□□1□-MX100S1E20FP3	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX206S□-C50-□□1□-MX100S1E20FP3	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207S□-C12-□□1□-MX100S1E20FP4	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207S□-C16-□□1□-MX100S1E20FP4	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207S□-C20-□□1□-MX100S1E20FP4	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207S□-C25-□□1□-MX100S1E20FP4	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207S□-C28-□□1□-MX100S1E20FP5	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207S□-C30-□□1□-MX100S1E20FP6	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207S□-C35-□□1□-MX100S1E20FP5	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207S□-C40-□□1□-MX100S1E20FP6	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207S□-C50-□□1□-MX100S1E20FP6	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207S□-C70-□□1□-MX100S1E20FP6	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75

Without filter	N	55	EA	Without battery	12	B30 (3m)	Without brake	18	B30 (3m)
With filter	F		PA	With battery	13	B50 (5m)	With brake	16	B50 (5m)
		53	PA	Without battery	14	B70 (7m)			B70 (7m)
				With battery	15	C10 (10m)			C10 (10m)
						C15 (15m)			C15 (15m)
						C20 (20m)			C20 (20m)
						C30 (30m)			C30 (30m)
						C40 (40m)			C40 (40m)
						C50 (50m)			C50 (50m)

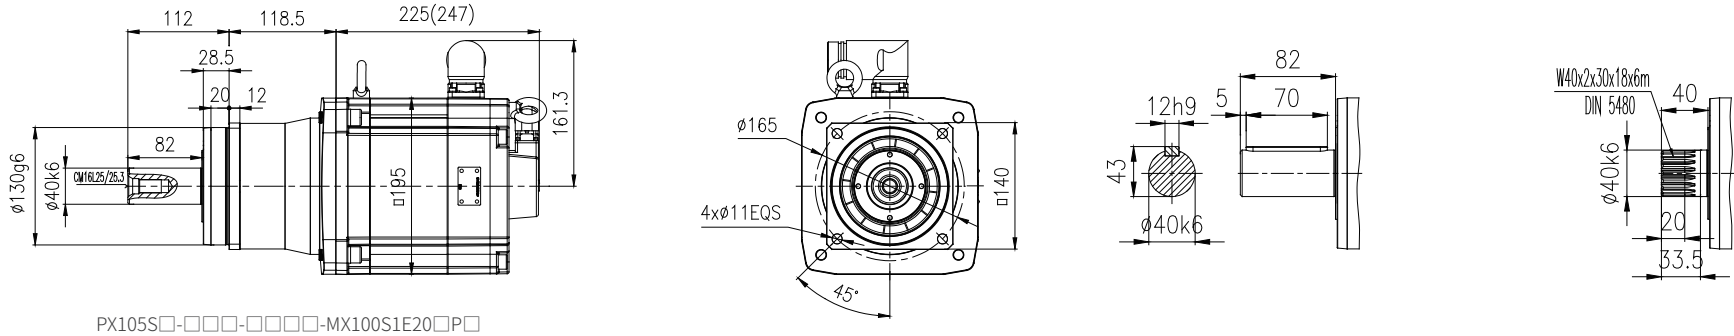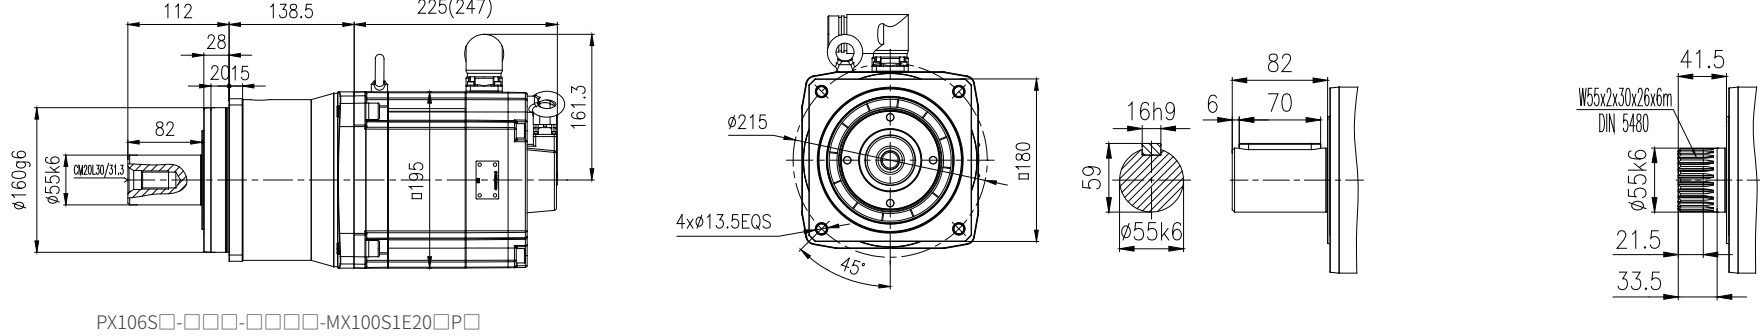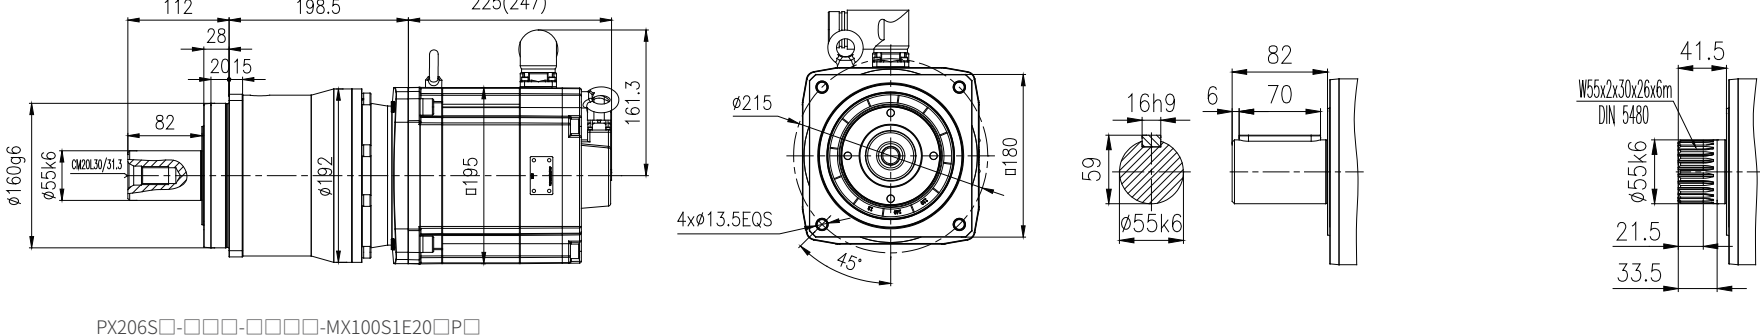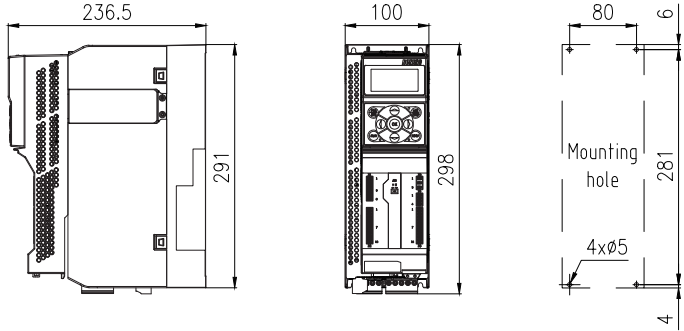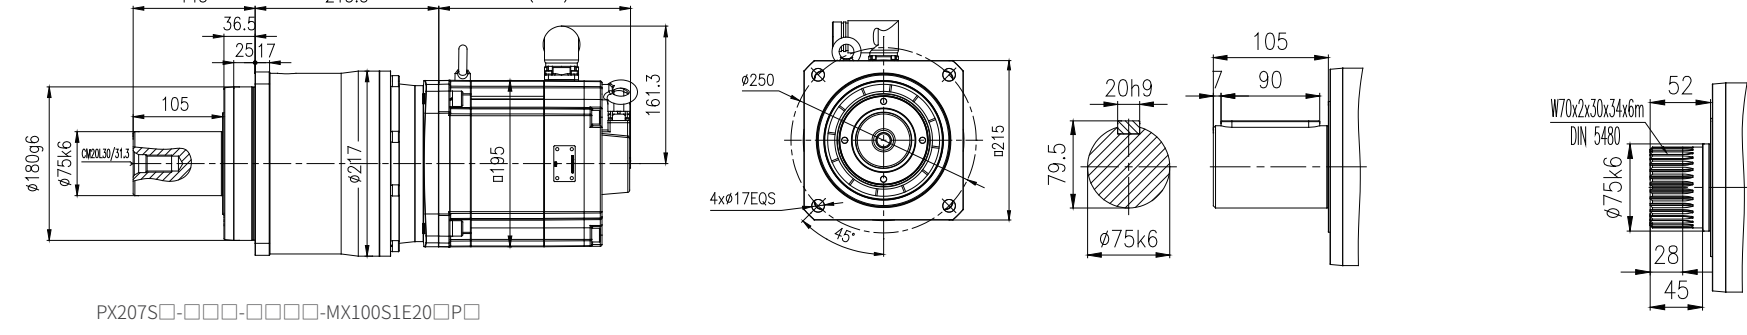MX100S Outline dimension diagram (mm)	Outline dimension diagram of the equipped servo driver
 PX105S□-□□□-□□□□-MX100S1E20□P□	
 PX106S□-□□□-□□□□-MX100S1E20□P□	
 PX206S□-□□□-□□□□-MX100S1E20□P□	 Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3B75-N(Without filter) or AX-PM26-B3B75-F(With filter) Operator module: A1-OP25
 PX207S□-□□□-□□□□-MX100S1E20□P□	

注: () 为带制动器尺寸

Note: () is the size with brake.






伺服马达：7.96KW 38Nm
17.3A 2000r/min

Servo motor: 7.96KW 38Nm
17.3A 2000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
667	110.6	B30	3	3/1	220	500	650	1250	177.63	2	1.99
500	147.5	B40	4	4/1	355	830	1100	1350	175.16	2	2.41
400	184.3	B50	5	5/1	355	830	1100	1350	173.34	2	1.93
667	110.6	B30	3	3/1	580	1200	1600	2600	199.71	2	5.24
500	147.5	B40	4	4/1	950	1525	2030	2800	185.55	2	6.44
400	184.3	B50	5	5/1	965	1525	2030	2800	180.06	2	5.23
286	258.1	B70	7	7/1	925	1525	2030	2800	175.21	2	3.58
200	368.7	C10	10	10/1	900	1200	1600	2600	172.62	2	2.44
167	429.2	C12	12	12/1	730	1300	1300	2850	176.29	2	1.70
125	572.2	C16	16	16/1	1200	1600	1600	2850	175.41	2	2.10
100	715.3	C20	20	20/1	1200	1600	1600	2850	173.5	2	1.68
80	894.1	C25	25	25/1	1200	1600	2000	2850	173.28	2	1.34
167	429.2	C12	12	12/1	1500	1900	2100	5550	186.54	2	3.50
125	572.2	C16	16	16/1	1900	3000	3200	5550	184.78	2	3.32
100	715.3	C20	20	20/1	1900	3100	3200	5550	179.58	2	2.66
80	894.1	C25	25	25/1	1900	3100	3900	5550	179.14	2	2.13
71	1001.4	C28	28	28/1	1900	3000	3200	5550	174.97	2	1.90
67	1072.9	C30	30	30/1	1500	1900	2100	5550	172.78	2	1.40
57	1251.7	C35	35	35/1	1900	3000	3900	5550	174.74	2	1.52
50	1430.5	C40	40	40/1	1900	3000	3000	5550	172.5	2	1.33
40	1788.1	C50	50	50/1	1900	3000	3700	5550	172.39	2	1.06

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
Planetary precision servo gearmotor oder number	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX105S□-B30-□□1□-MX100M1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX105S□-B40-□□1□-MX100M1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX105S□-B50-□□1□-MX100M1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX106S□-B30-□□1□-MX100M1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX106S□-B40-□□1□-MX100M1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX106S□-B50-□□1□-MX100M1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX106S□-B70-□□1□-MX100M1E20FP3	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX106S□-C10-□□1□-MX100M1E20FP4	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX206S□-C12-□□1□-MX100M1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX206S□-C16-□□1□-MX100M1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX206S□-C20-□□1□-MX100M1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX206S□-C25-□□1□-MX100M1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C12-□□1□-MX100M1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C16-□□1□-MX100M1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C20-□□1□-MX100M1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C25-□□1□-MX100M1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C28-□□1□-MX100M1E20FP3	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C30-□□1□-MX100M1E20FP4	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C35-□□1□-MX100M1E20FP3	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C40-□□1□-MX100M1E20FP4	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C50-□□1□-MX100M1E20FP4	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

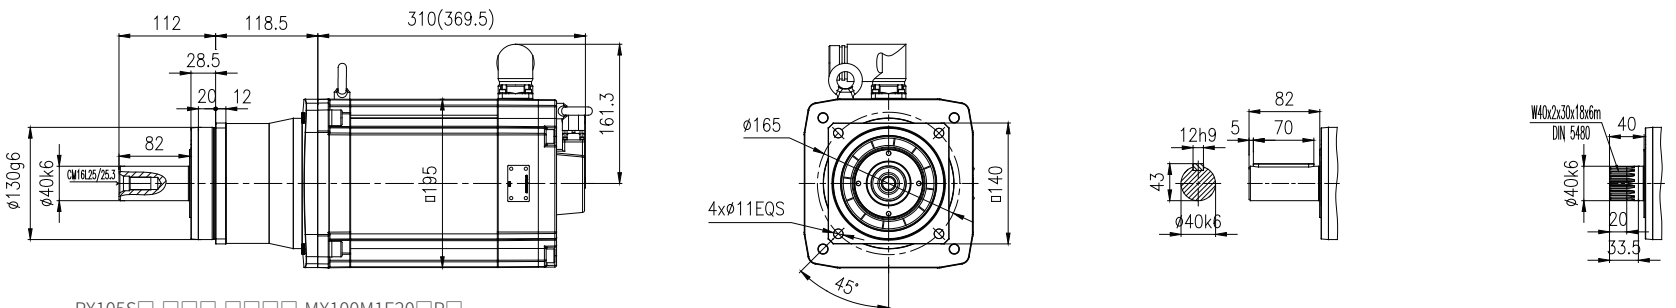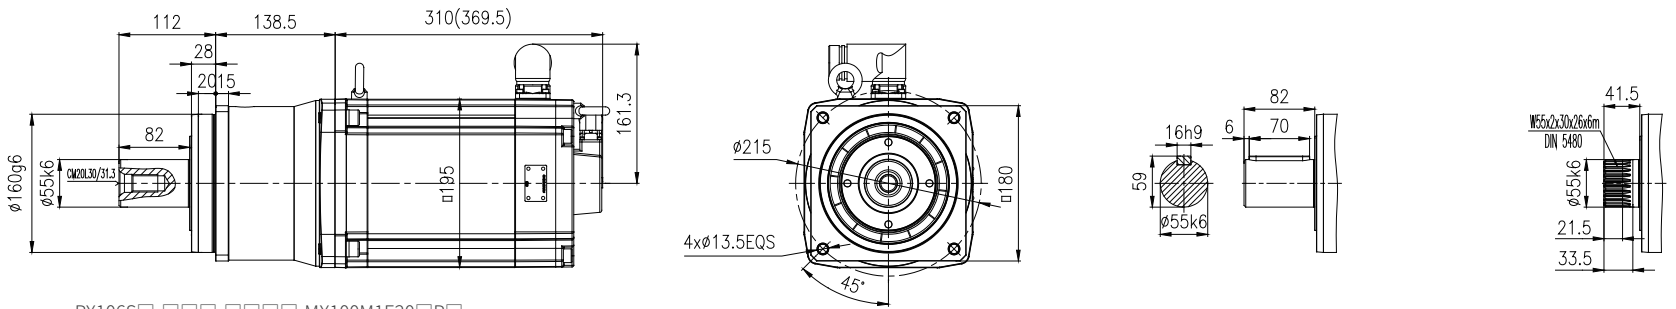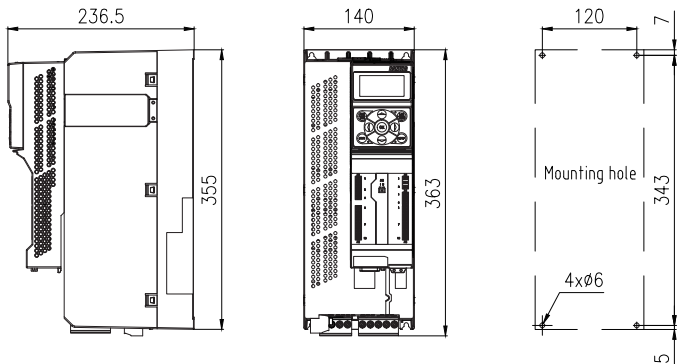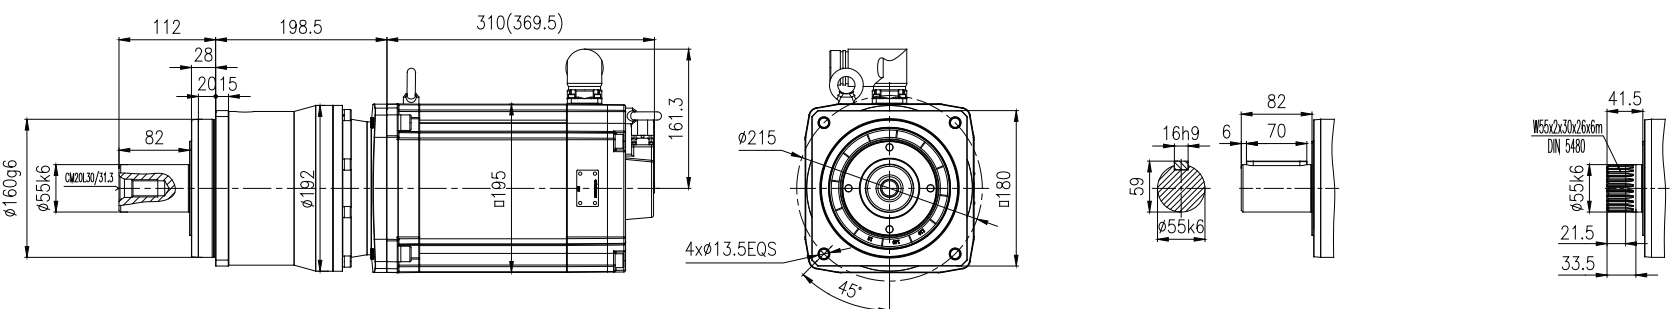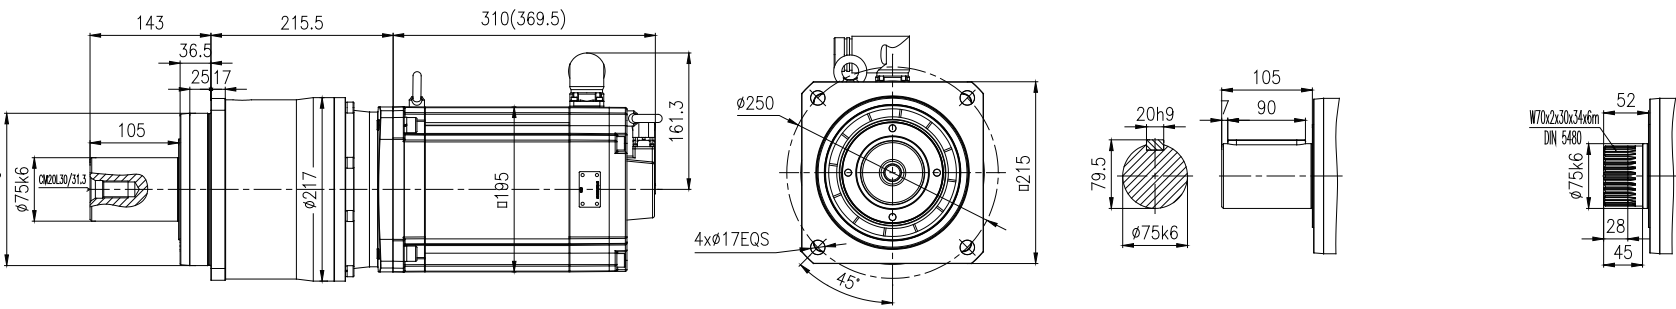MX100M Outline dimension diagram(mm)	Outline dimension diagram of the equipped servo driver
 PX105S□-□□□-□□□□-MX100M1E20□P□	
 PX106S□-□□□-□□□□-MX100M1E20□P□	 Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3C15-N(Without filter) or AX-PM26-B3C15-F(With filter) Operator module: A1-OP25
 PX206S□-□□□-□□□□-MX100M1E20□P□	
 PX207S□-□□□-□□□□-MX100M1E20□P□	

注： () 为带制动器尺寸

Note: () is the size with brake.







伺服马达：10.06KW 48Nm
19.6A 2000r/min

Servo motor: 10.06KW 48Nm
19.6A 2000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
667	139.8	B30	3	3/1	220	500	650	1250	260.1	2	1.57
500	186.4	B40	4	4/1	355	830	1100	1350	257.63	2	1.90
400	233.0	B50	5	5/1	355	830	1100	1350	255.81	2	1.52
667	139.8	B30	3	3/1	580	1200	1600	2600	282.18	2	4.15
500	186.4	B40	4	4/1	950	1525	2030	2800	268.02	2	5.10
400	233.0	B50	5	5/1	965	1525	2030	2800	262.53	2	4.14
286	326.2	B70	7	7/1	925	1525	2030	2800	257.68	2	2.84
200	466.0	C10	10	10/1	900	1200	1600	2600	255.09	2	1.93
167	559.1	C12	12	12/1	730	1300	1300	2850	258.76	2	1.31
125	745.5	C16	16	16/1	1200	1600	1600	2850	257.88	2	1.61
100	931.9	C20	20	20/1	1200	1600	1600	2850	255.97	2	1.29
80	1164.9	C25	25	25/1	1200	1600	2000	2850	255.75	2	1.03
286	326.2	B70	7	7/1	1700	2950	3900	5950	263.09	2	5.21
200	466.0	C10	10	10/1	1700	2300	2900	5950	257.82	2	3.65
167	542.4	C12	12	12/1	1500	1900	2100	5550	269.01	2	2.77
125	723.2	C16	16	16/1	1900	3000	3200	5550	267.25	2	2.63
100	904.0	C20	20	20/1	1900	3100	3200	5550	262.05	2	2.10
80	1129.9	C25	25	25/1	1900	3100	3900	5550	261.61	2	1.68
71	1265.5	C28	28	28/1	1900	3000	3200	5550	257.44	2	1.50
67	1355.9	C30	30	30/1	1500	1900	2100	5550	255.25	2	1.11
57	1581.9	C35	35	35/1	1900	3000	3900	5550	257.21	2	1.20
50	1807.9	C40	40	40/1	1900	3000	3000	5550	254.97	2	1.05

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
Planetary precision servo gearmotor oder number	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX105S□-B30-□□1□-MX100L1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX105S□-B40-□□1□-MX100L1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX105S□-B50-□□1□-MX100L1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX106S□-B30-□□1□-MX100L1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX106S□-B40-□□1□-MX100L1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX106S□-B50-□□1□-MX100L1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX106S□-B70-□□1□-MX100L1E20FP3	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX106S□-C10-□□1□-MX100L1E20FP4	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX206S□-C12-□□1□-MX100L1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX206S□-C16-□□1□-MX100L1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX206S□-C20-□□1□-MX100L1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX206S□-C25-□□1□-MX100L1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX107S□-B70-□□1□-MX100L1E20LP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX107S□-C10-□□1□-MX100L1E20LP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C12-□□1□-MX100L1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C16-□□1□-MX100L1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C20-□□1□-MX100L1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C25-□□1□-MX100L1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C28-□□1□-MX100L1E20FP3	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C30-□□1□-MX100L1E20FP4	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C35-□□1□-MX100L1E20FP3	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207S□-C40-□□1□-MX100L1E20FP4	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

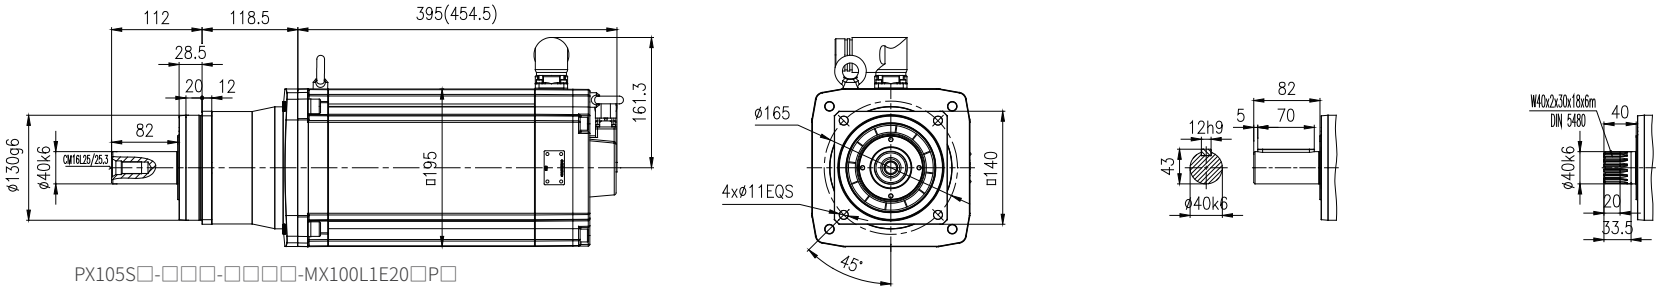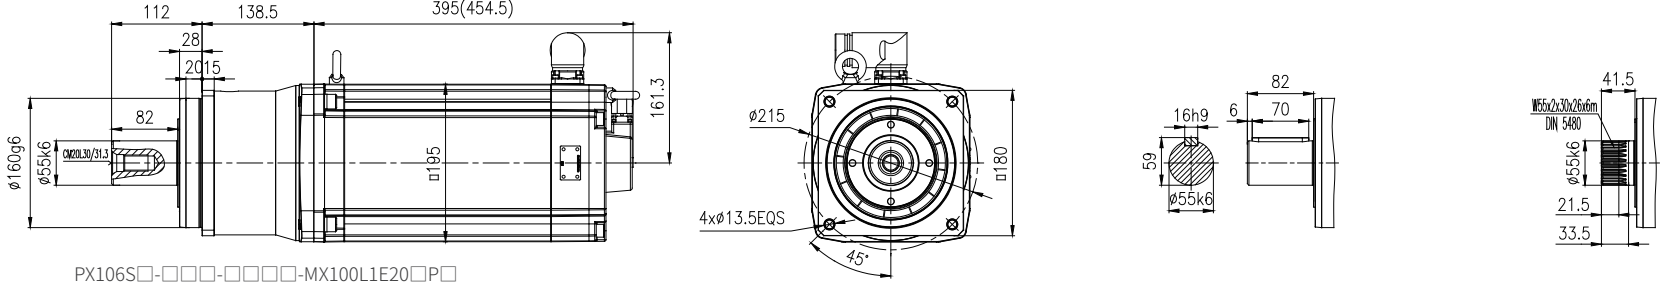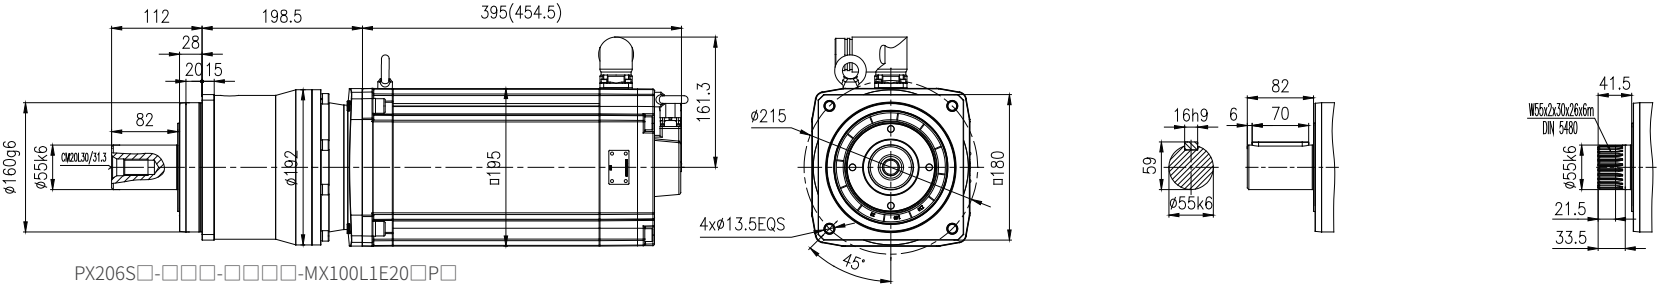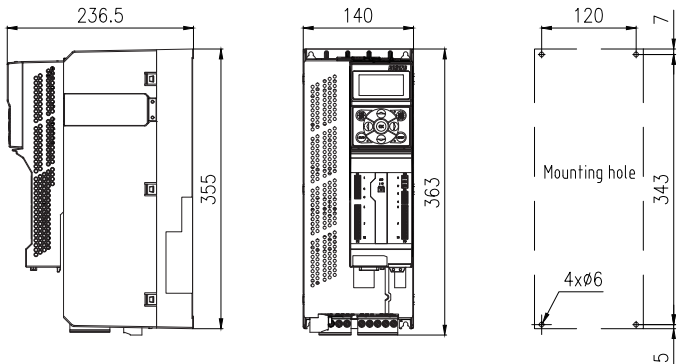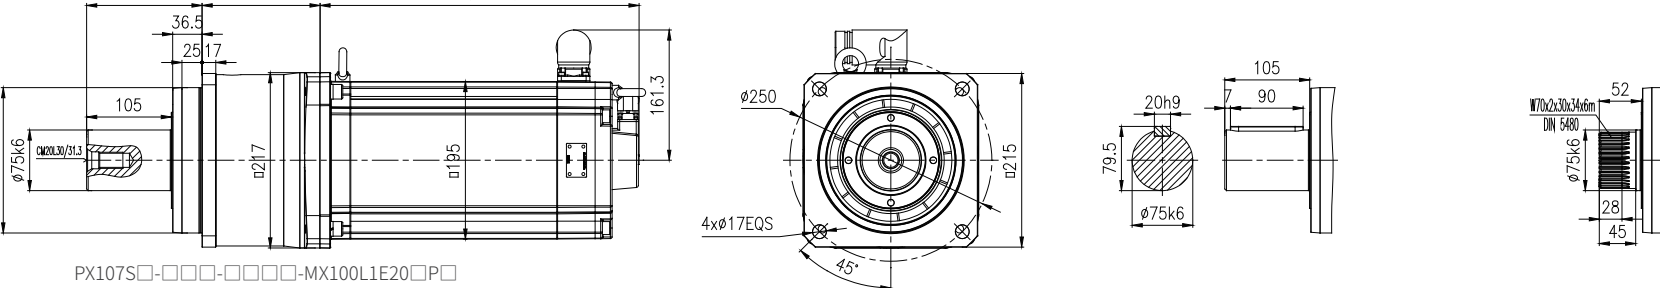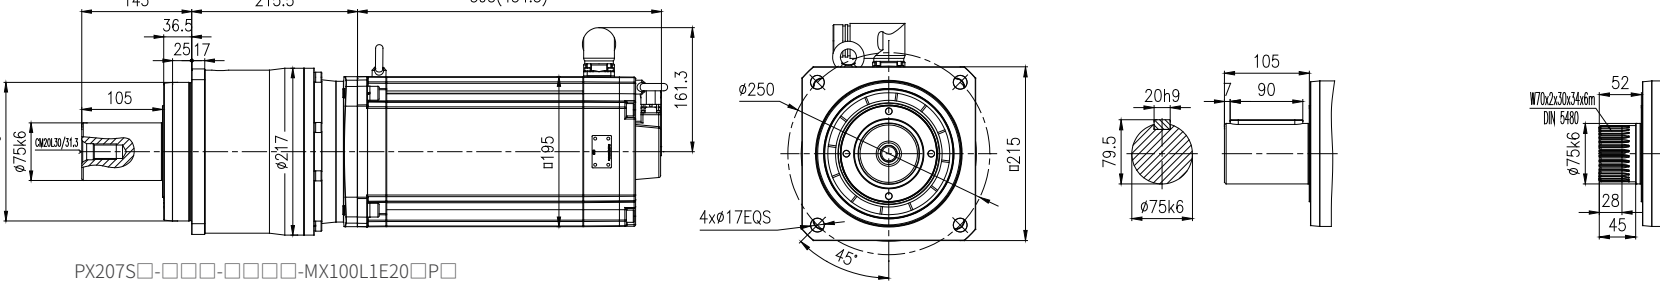MX100L Outline dimension diagram(mm)	Outline dimension diagram of the equipped servo driver
 PX105S□-□□□-□□□□-MX100L1E20□P□	
 PX106S□-□□□-□□□□-MX100L1E20□P□	
 PX206S□-□□□-□□□□-MX100L1E20□P□	 Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3C15-N(Without filter) or AX-PM26-B3C15-F(With filter) Operator module: A1-OP25
 PX107S□-□□□-□□□□-MX100L1E20□P□	
 PX207S□-□□□-□□□□-MX100L1E20□P□	

注： () 为带制动器尺寸

Note: () is the size with brake.

4 输出轴允许的
轴向力和径向力

4 Permissible axial and radial
forces on the output shaft


输出轴 载荷	Output shaft load	代号 Code	单位 Unit	PX102S PX202S	PX103S PX203S	PX104S PX204S	PX105S PX205S	PX106S PX206S	PX107S PX207S
20000h 的径向力	Radial force for 20000h	F _{r20000h}	N	3000	4850	6700	11000	19300	23550
20000h 的轴向力	Axial force for 20000h	F _{a20000h}		3900	6400	9400	16450	26600	34050
30000h 的径向力	Radial force for 30000h	F _{r30000h}		2650	4300	5900	9750	17100	20850
30000h 的轴向力	Axial force for 30000h	F _{a30000h}		3450	5650	8300	14550	23550	30150
20000h 的侧倾力矩	Tilting moment for 20000h	M _{k20000h}	Nm	172	335	576	1210	2468	3504
30000h 的侧倾力矩	Tilting moment for 30000h	M _{k30000h}		153	297	510	1071	2185	3102

5 重量表

5 Weight table

PX(S) 行星齿轮箱重量表 (Kg)				PX(S) Planetary Gearbox Weight table(Kg)			
机座号	Frame size	PX102S	PX103S	PX104S	PX105S	PX106S	PX107S
重量	Weight	1.8	3.5	7.5	14.6	25.1	39.4
机座号	Frame size	PX202	PX203	PX204	PX205	PX206	PX207
重量	Weight	2.1	4.2	8.9	17.9	33.9	51.2

直连 MX伺服马达重量表 (Kg)							Directly connected MX servo motor weight table(Kg)							
机座号	Frame size	MX 028S	MX 028M	MX 036S	MX 036M	MX 048S	MX 048M	MX 063S	MX 063M	MX 080S	MX 080M	MX 100S	MX 100M	MX 100L
额定功率(KW)	Rated power	0.38	0.54	0.66	0.8	1.32	1.55	1.7	2.76	3.24	5.03	5.03	7.96	10.06
不带制动	Without brake	1.8	2.4	2.7	3.9	4.5	7	7.1	10.9	13.6	21.9	25.6	42.4	58.5
带制动	With brake	2	2.7	3.1	4.3	5.2	7.7	8	11.8	14.3	23.9	27	47.2	63




PX...T-MX行星精密
齿轮伺服马达

PX...T-MX Planetary
precision Servo
Gearmotor


6 型号表示方法

6 Model representation
method

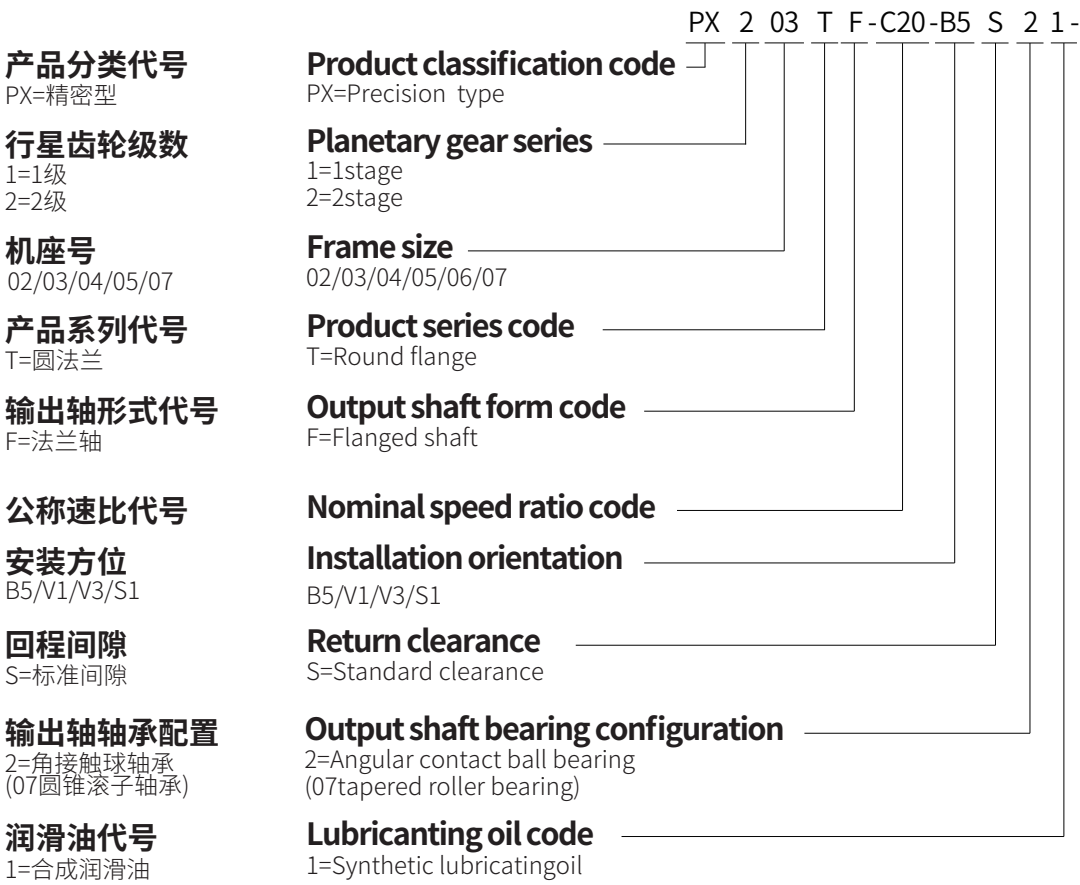

7 安装方位

7 PX...T-MX Installation orientation

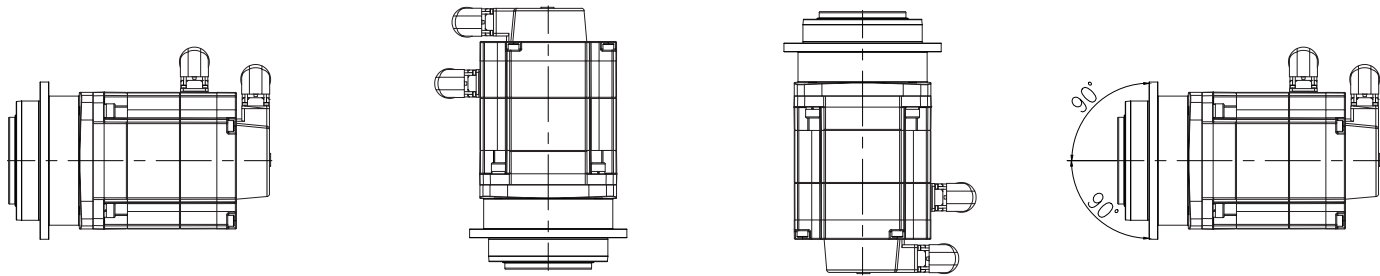


B5-水平 B5 level

V1-垂直 V1-Vertical
(输出轴 输出
向下) axis down)

V3-垂直 V3-Vertical
(输出轴 输出
向上) axis up)

S1-可以从 S1-can flip
水平到翻 from
转±90° horizontal
to ± 90°

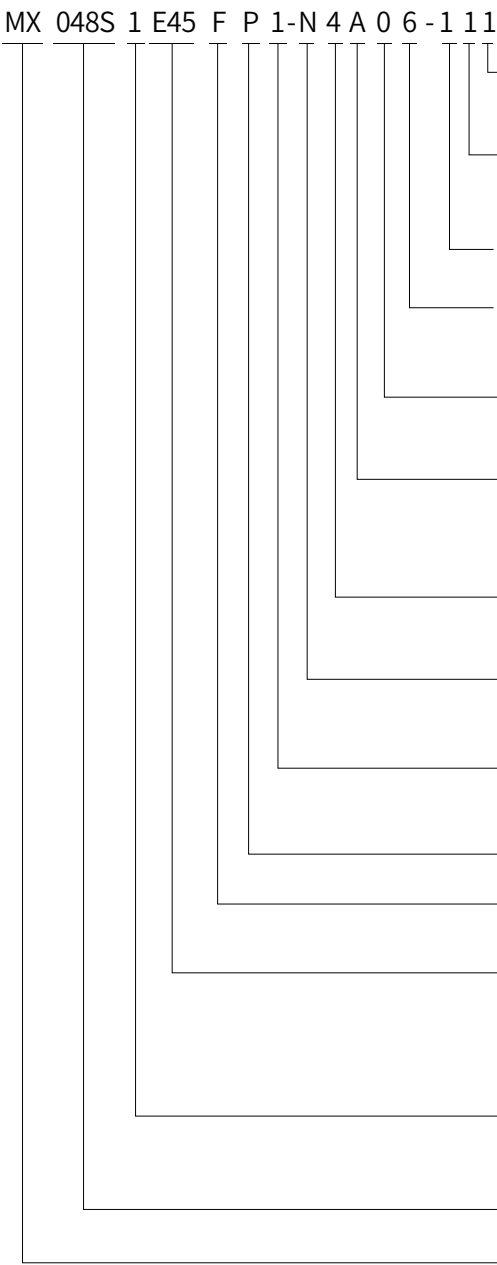

连接器位置
1=可旋转

连接器类型
1=规格1

连接器方位

保护等级
6=IP66

热保护
0=无绕组保护

制动器
N=无制动器
A=永磁制动器

编码器
4=Biss-C编码器(线缆≤50m)

冷却方式
N=自然冷却

轴孔径代号
1、2、3...

轴伸形式P

法兰形式F/L

额定转速代号
E20=2000r/min
E30=3000r/min
E45=4500r/min

结构形式
1=紧凑型

机座号

三相交流同步
伺服马达

Connector location
1=Rotable

Connector Type
1 = Specifications 1

Connector orientation

Protection class
6=IP66

Thermal protect
0=Without thermal protection

Brake
N=Without brake
A=With brake

Encoder
4=Biss-C Encoder(Cable length≤50m)

Cooling method
N=Natural Cooling

Axis aperture code
1、2、3...

Axial extension form P

Flange form F/L

Rated speed code
E20=2000r/min
E30=3000r/min
E45=4500r/min

Structural type
1 = Compact

Frame size

Three Phase AC
Synchronous
Servomotor

8 PX..T-MX传动能力表和外形尺寸图

伺服马达：0.38KW 0.8Nm 1.2A 4500r/min

8 PX..T-MX Transmission capacity table and external dimension diagram

Servo motor: 0.38KW 0.8Nm 1.2A 4500r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
643	5.5	B70	7	7/1	28	66	85	110	0.19	4	5.11
450	7.8	C10	10	10/1	28	42	58	105	0.17	4	3.58
281	12.1	C16	16	16/1	42	66	66	110	0.17	4	3.46
225	15.2	C20	20	20/1	42	66	66	110	0.16	4	2.77
180	19.0	C25	25	25/1	42	66	75	110	0.16	4	2.21
161	21.2	C28	28	28/1	42	66	66	110	0.16	4	1.98
129	26.6	C35	35	35/1	42	66	75	110	0.16	4	1.58
113	30.4	C40	40	40/1	42	66	66	110	0.15	4	1.38
90	37.9	C50	50	50/1	42	66	75	110	0.15	4	1.11
161	21.2	C28	28	28/1	105	160	160	260	0.19	4	4.94
129	26.6	C35	35	35/1	120	160	160	260	0.18	4	4.52
113	30.4	C40	40	40/1	110	160	160	260	0.17	4	3.62
90	37.9	C50	50	50/1	120	160	160	260	0.17	4	3.16
64	53.1	C70	70	70/1	120	160	160	260	0.17	4	2.26
45	75.9	D10	100	100/1	88	110	110	235	0.16	4	1.16

此规格高速级内齿圈
目前不是硬齿面

The high-speed inner gear ring of
this specification is currently
not a hard tooth surface

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
Planetary precision servo gearmotor oder number	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX102T□-B70-□□1□-MX028S1E45LP1	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX102T□-C10-□□1□-MX028S1E45LP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202T□-C16-□□1□-MX028S1E45FP1	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202T□-C20-□□1□-MX028S1E45FP1	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202T□-C25-□□1□-MX028S1E45FP1	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202T□-C28-□□1□-MX028S1E45FP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202T□-C35-□□1□-MX028S1E45FP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202T□-C40-□□1□-MX028S1E45FP3	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX202T□-C50-□□1□-MX028S1E45FP3	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX203T□-C28-□□1□-MX028S1E45LP1	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX203T□-C35-□□1□-MX028S1E45LP1	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX203T□-C40-□□1□-MX028S1E45LP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX203T□-C50-□□1□-MX028S1E45LP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX203T□-C70-□□1□-MX028S1E45LP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75
PX203T□-D10-□□1□-MX028S1E45LP2	AX-PM26-B3A75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A06-K-D75

Without filter N
With filter F

55


EA
PA

Without battery 12
With battery 13
Without battery 14
With battery 15


B30(3m)
B50(5m)
B70(7m)
C10(10m)
C15(15m)
C20(20m)
C30(30m)
C40(40m)
C50(50m)

Without brake 18 B30(3m)
With brake 16 B50(5m)
B70(7m)
C10(10m)
C15(15m)
C20(20m)
C30(30m)
C40(40m)
C50(50m)

MX028S Outline dimension diagram (mm)

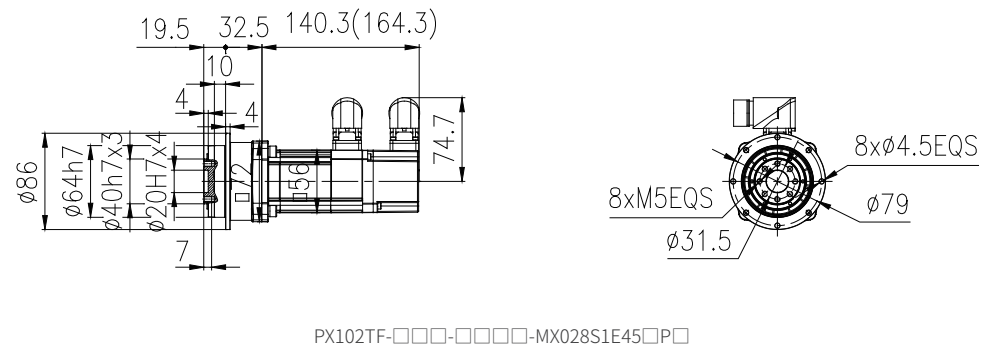

Outline dimension diagram of the equipped servo driver

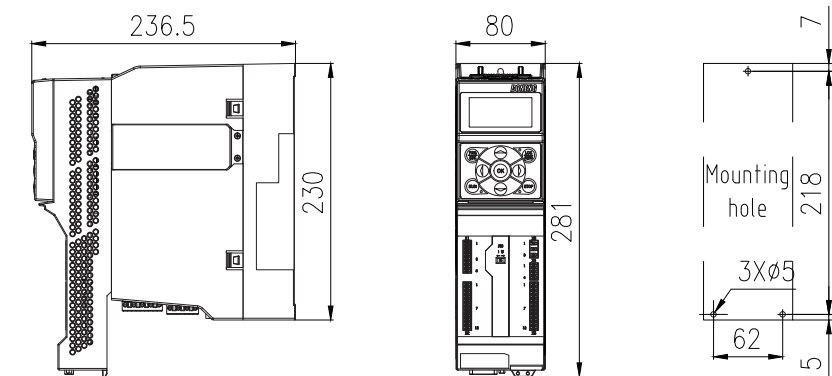


Control module: AX-CM55-PA-PE(ProfiNet) or
AX-CM55-EA-PE(EtherCAT)


Power module: AX-PM26-B3A75-N(Without filter) or
AX-PM26-B3A75-F(With filter)

Operator module: A1-OP25

MX028S Outline dimension diagram (mm)

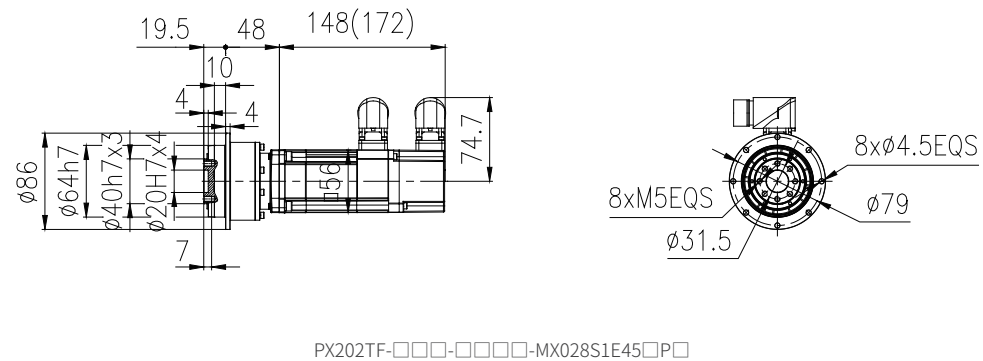

MX028S Outline dimension diagram (mm)

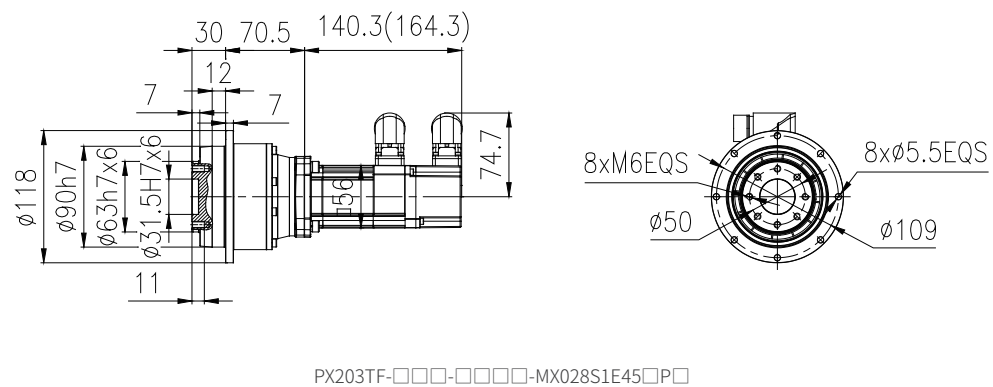

伺服马达：0.54KW 1.1Nm
1.8A 4500r/min

Servo motor: 0.54KW 1.1Nm
1.8A 4500r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox maximum acceleration torque	Gearbox maximum torque	Gearbox emergency stop torque	Gearbox rotational inertia	Gearbox maximum return clearance	Gearbox service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
643	7.8	B70	7	7/1	28	66	85	110	0.29	4	3.60
450	11.1	C10	10	10/1	28	42	58	105	0.27	4	2.52
281	17.3	C16	16	16/1	42	66	66	110	0.27	4	2.43
225	21.6	C20	20	20/1	42	66	66	110	0.26	4	1.95
180	27.0	C25	25	25/1	42	66	75	110	0.26	4	1.56
161	30.2	C28	28	28/1	105	160	160	260	0.29	4	3.48
129	37.7	C35	35	35/1	120	160	160	260	0.28	4	3.18
113	43.1	C40	40	40/1	110	160	160	260	0.27	4	2.55
90	53.9	C50	50	50/1	120	160	160	260	0.27	4	2.23
64	75.5	C70	70	70/1	120	160	160	260	0.27	4	1.59

此规格高速级内齿圈
目前不是硬齿面

The high-speed inner gear ring of
this specification is currently
not a hard tooth surface

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
Planetary precision servo gearmotor oder number	Servo drive order number			Servo motor cable configuration order number		Servo drive braking resistor order number
	Power module	Operator panel	Control module	Servo motor signal line	Servo motor power line	
PX102T□-B70-□□1□-MX028M1E45LP1	AX-PM26-B3B15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102T□-C10-□□1□-MX028M1E45LP2	AX-PM26-B3B15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202T□-C16-□□1□-MX028M1E45FP1	AX-PM26-B3B15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202T□-C20-□□1□-MX028M1E45FP1	AX-PM26-B3B15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202T□-C25-□□1□-MX028M1E45FP1	AX-PM26-B3B15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C28-□□1□-MX028M1E45LP1	AX-PM26-B3B15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C35-□□1□-MX028M1E45LP1	AX-PM26-B3B15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C40-□□1□-MX028M1E45LP2	AX-PM26-B3B15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C50-□□1□-MX028M1E45LP2	AX-PM26-B3B15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C70-□□1□-MX028M1E45LP2	AX-PM26-B3B15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39

Without filter N
With filter F

55 EA
PA

Without battery 12
With battery 13

B30(3m)
B50(5m)

Without brake 18
With brake 16

B30(3m)
B50(5m)

53 PA

Without battery 14
With battery 15

B70(7m)
C10(10m)

B70(7m)
C10(10m)

C15(15m)
C20(20m)

C15(15m)
C20(20m)




C30(30m)
C40(40m)

C30(30m)
C40(40m)

C50(50m)

C50(50m)


MX028M Outline dimension diagram (mm)

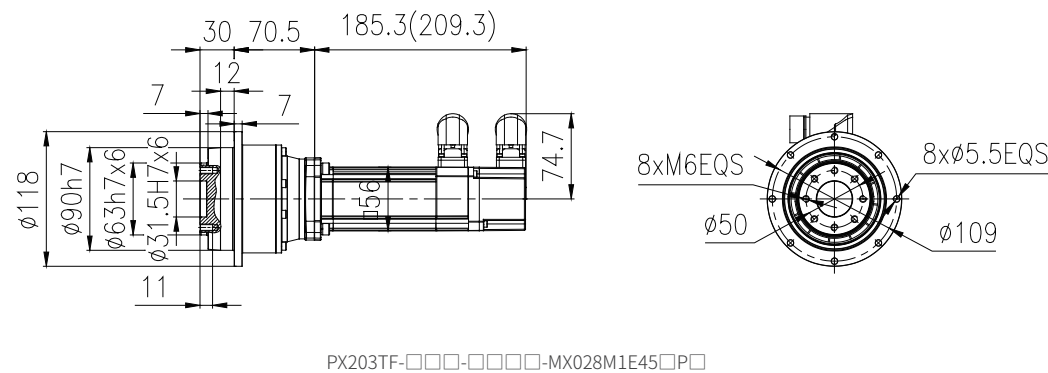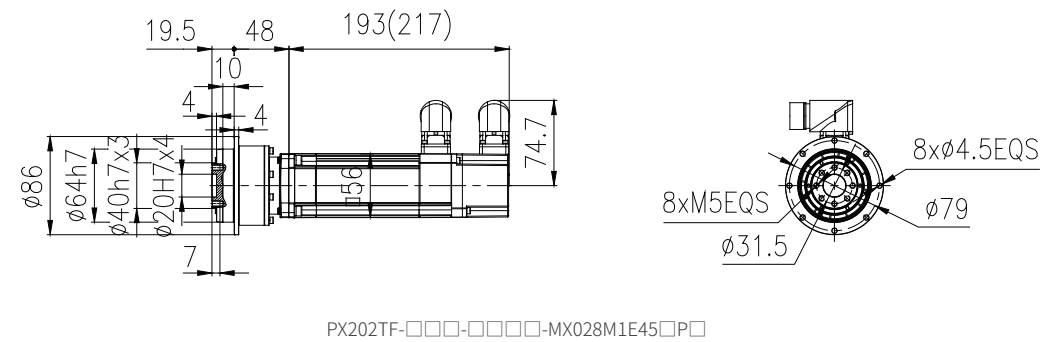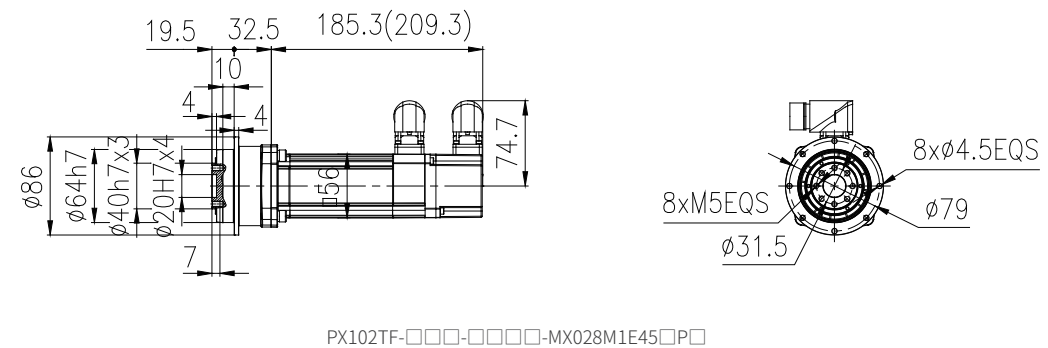

注：（）为带制动器尺寸

Note: () is the size with brake.

Outline dimension diagram of the equipped servo driver

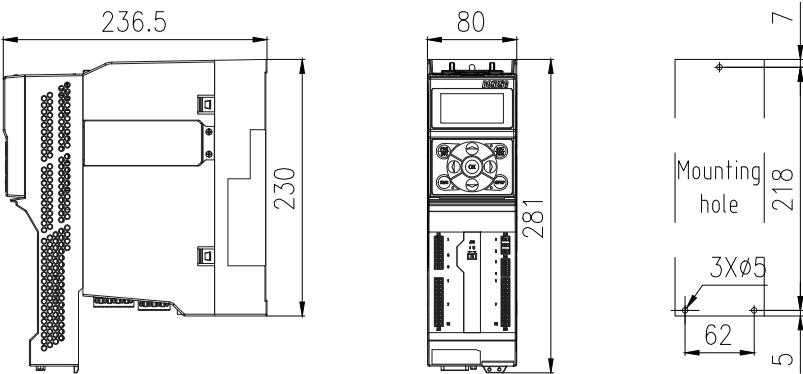

Control module: AX-CM55-PA-PE(ProfiNet) or
AX-CM55-EA-PE(EtherCAT)
Power module: AX-PM26-B3B15-N(Without filter) or
AX-PM26-B3B15-F (With filter)
Operator module: A1-OP25

伺服马达：0.66KW 1.4Nm
1.9A 4500r/min

Servo motor: 0.66KW 1.4Nm
1.9A 4500r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox Output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox Maximum acceleration torque	Gearbox maximum torque	Gearbox Emergency stop torque	Gearbox rotational inertia	Gearbox Maximum return clearance	Gearbox Service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
1125	5.4	B40	4	4/1	28	66	85	110	0.85	4	5.15
900	6.8	B50	5	5/1	28	66	85	110	0.81	4	4.12
643	9.5	B70	7	7/1	28	66	85	110	0.78	4	2.94
450	13.6	C10	10	10/1	28	42	58	105	0.76	4	2.06
281	21.1	C16	16	16/1	42	66	66	110	0.76	4	1.99
225	26.4	C20	20	20/1	42	66	66	110	0.75	4	1.59
180	32.9	C25	25	25/1	42	66	75	110	0.75	4	1.27
281	21.1	C16	16	16/1	105	160	160	260	0.86	4	4.98
225	26.4	C20	20	20/1	105	160	160	260	0.82	4	3.98
180	32.9	C25	25	25/1	120	160	160	260	0.81	4	3.64
161	36.9	C28	28	28/1	105	160	160	260	0.78	4	2.85
129	46.1	C35	35	35/1	120	160	160	260	0.77	4	2.60
113	52.7	C40	40	40/1	110	160	160	260	0.76	4	2.09
90	65.9	C50	50	50/1	120	160	160	260	0.76	4	1.82
64	92.3	C70	70	70/1	120	160	160	260	0.76	4	1.30
113	52.7	C40	40	40/1	290	360	360	625	0.82	3	5.50
90	65.9	C50	50	50/1	290	360	360	625	0.81	3	4.40
64	92.3	C70	70	70/1	290	360	360	625	0.81	3	3.14
45	131.8	D10	100	100/1	240	270	270	625	0.81	3	1.82






此规格高速级内齿圈
目前不是硬齿面

The high-speed inner gear ring of
this specification is currently
not a hard tooth surface

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
Planetary precision servo gearmotor Oder number	Servo Drive Order Number			Servo Motor Cable Configuration Order Number		Servo Drive Braking Resistor Order Number
	Power module	Operator panel	Control module	Servo motor Signal line	Servo motor power line	
PX102T□-B40-□□1□-MX036S1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102T□-B50-□□1□-MX036S1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102T□-B70-□□1□-MX036S1E45FP3	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102T□-C10-□□1□-MX036S1E45FP4	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202T□-C16-□□1□-MX036S1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202T□-C20-□□1□-MX036S1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX202T□-C25-□□1□-MX036S1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C16-□□1□-MX036S1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C20-□□1□-MX036S1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C25-□□1□-MX036S1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C28-□□1□-MX036S1E45FP3	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C35-□□1□-MX036S1E45FP3	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C40-□□1□-MX036S1E45FP4	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C50-□□1□-MX036S1E45FP4	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C70-□□1□-MX036S1E45FP4	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204T□-C40-□□1□-MX036S1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204T□-C50-□□1□-MX036S1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204T□-C70-□□1□-MX036S1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204T□-D10-□□1□-MX036S1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39

Without filter N
With filter F

55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
	PA	With battery	13	B50(5m)	With brake	16	B50(5m)
53	PA	Without battery	14	B70(7m)			B70(7m)
		With battery	15	C10(10m)			C10(10m)
				C15(15m)			C15(15m)
				C20(20m)			C20(20m)
				C30(30m)			C30(30m)
				C40(40m)			C40(40m)
				C50(50m)			C50(50m)

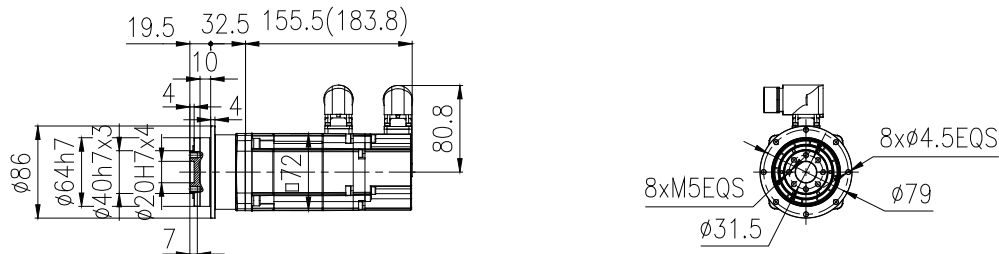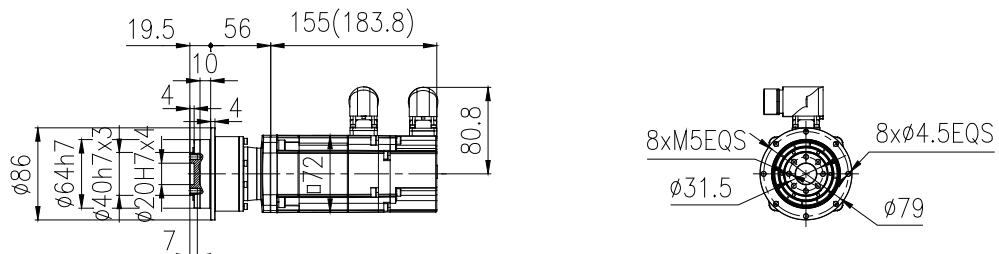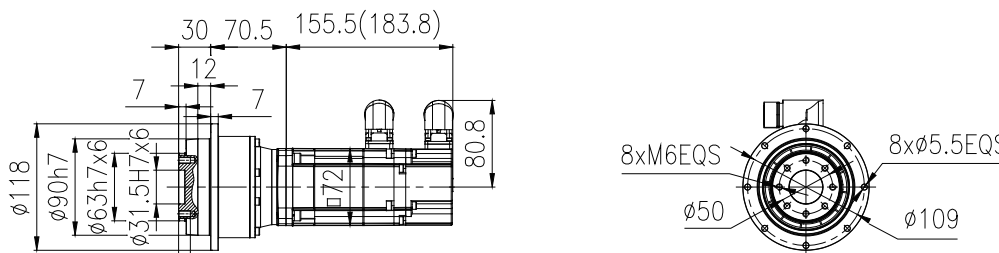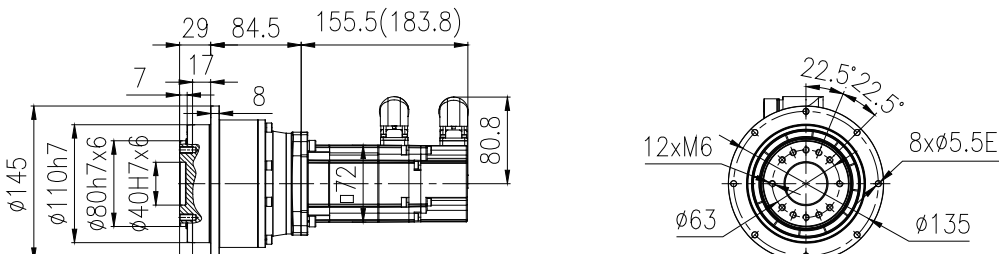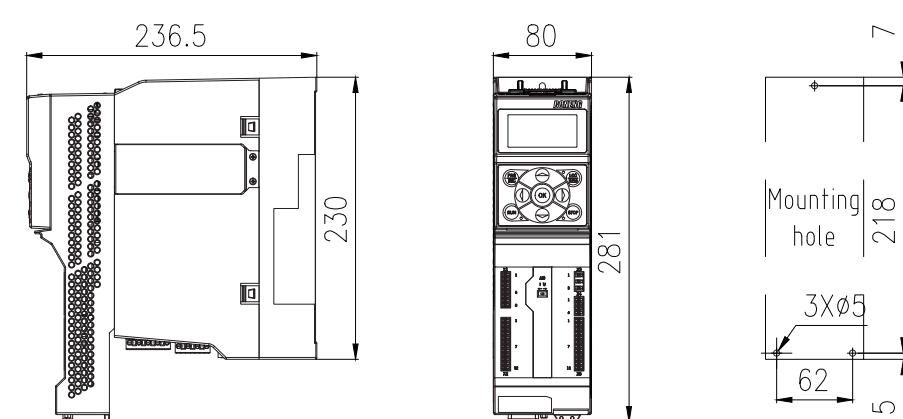MX036S Outline dimension diagram (mm)	Outline dimension diagram of the equipped servo driver
 PX102TF-□□□-□□□□-MX036S1E45□P□	
 PX202TF-□□□-□□□□-MX036S1E45□P□	
 PX203TF-□□□-□□□□-MX036S1E45□P□	
 PX204TF-□□□-□□□□-MX036S1E45□P□	 Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3B15-N(Without filter) or AX-PM26-B3B15-F(With filter) Operator module: A1-OP25

注： () 为带制动器尺寸

Note: () is the size with brake.

伺服马达： 0.8KW 1.7Nm
1.7A 4500r/min





Servo motor: 0.8KW 1.7Nm
1.7A 4500r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox Output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox Maximum acceleration torque	Gearbox maximum torque	Gearbox Emergency stop torque	Gearbox rotational inertia	Gearbox Maximum return clearance	Gearbox Service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
1125	6.6	B40	4	4/1	28	66	85	110	1.52	4	4.25
900	8.2	B50	5	5/1	28	66	85	110	1.48	4	3.40
643	11.5	B70	7	7/1	28	66	85	110	1.45	4	2.43
450	16.5	C10	10	10/1	28	42	58	105	1.43	4	1.70
643	11.5	B70	7	7/1	85	175	215	260	1.6	3	7.37
450	16.5	C10	10	10/1	85	135	180	235	1.51	3	5.16
281	25.6	C16	16	16/1	105	160	160	260	1.53	4	4.11
225	31.9	C20	20	20/1	105	160	160	260	1.49	4	3.29
180	39.9	C25	25	25/1	120	160	160	260	1.48	4	3.00
161	44.7	C28	28	28/1	105	160	160	260	1.45	4	2.35
129	55.9	C35	35	35/1	120	160	160	260	1.44	4	2.15
113	63.9	C40	40	40/1	110	160	160	260	1.43	4	1.72
90	79.9	C50	50	50/1	120	160	160	260	1.43	4	1.50
161	44.7	C28	28	28/1	270	360	360	625	1.57	3	6.04
129	55.9	C35	35	35/1	290	360	360	625	1.56	3	5.19
113	63.9	C40	40	40/1	290	360	360	625	1.49	3	4.54
90	79.9	C50	50	50/1	290	360	360	625	1.48	3	3.63
64	111.8	C70	70	70/1	290	360	360	625	1.48	3	2.59
45	159.7	D10	100	100/1	240	270	270	625	1.48	3	1.50

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达 信号线	伺服马达 动力线	
Planetary precision servo gearmotor Oder number	Servo Drive Order Number			Servo Motor Cable Configuration Order Number		Servo Drive Braking Resistor Order Number
	Power module	Operator panel	Control module	Servo motor Signal line	Servo motor power line	
PX102T□-B40-□□1□-MX036M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102T□-B50-□□1□-MX036M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102T□-B70-□□1□-MX036M1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX102T□-C10-□□1□-MX036M1E45FP3	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX103T□-B70-□□1□-MX036M1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX103T□-C10-□□1□-MX036M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C16-□□1□-MX036M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C20-□□1□-MX036M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C25-□□1□-MX036M1E45FP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C28-□□1□-MX036M1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C35-□□1□-MX036M1E45FP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C40-□□1□-MX036M1E45FP3	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX203T□-C50-□□1□-MX036M1E45FP3	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204T□-C28-□□1□-MX036M1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204T□-C35-□□1□-MX036M1E45LP1	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204T□-C40-□□1□-MX036M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204T□-C50-□□1□-MX036M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204T□-C70-□□1□-MX036M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39
PX204T□-D10-□□1□-MX036M1E45LP2	AX-PM26-B3B15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A08-K-D39

Without filter N With filter F	55	EA	Without battery 12	B30(3m)	Without brake 18	B30(3m)
		PA	With battery 13	B50(5m)	With brake 16	B50(5m)
	53	PA	Without battery 14	B70(7m)		B70(7m)
			With battery 15	C10(10m)		C10(10m)
				C15(15m)		C15(15m)
				C20(20m)		C20(20m)
				C30(30m)		C30(30m)
				C40(40m)		C40(40m)
				C50(50m)		C50(50m)


MX036M Outline dimension diagram(mm)

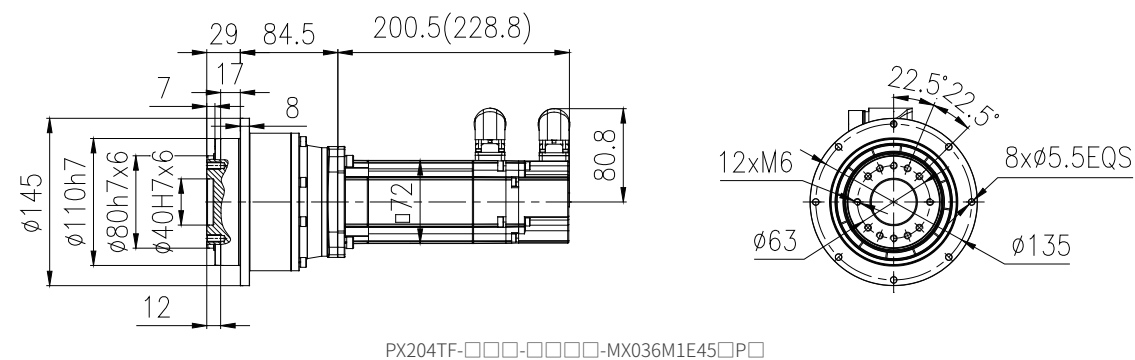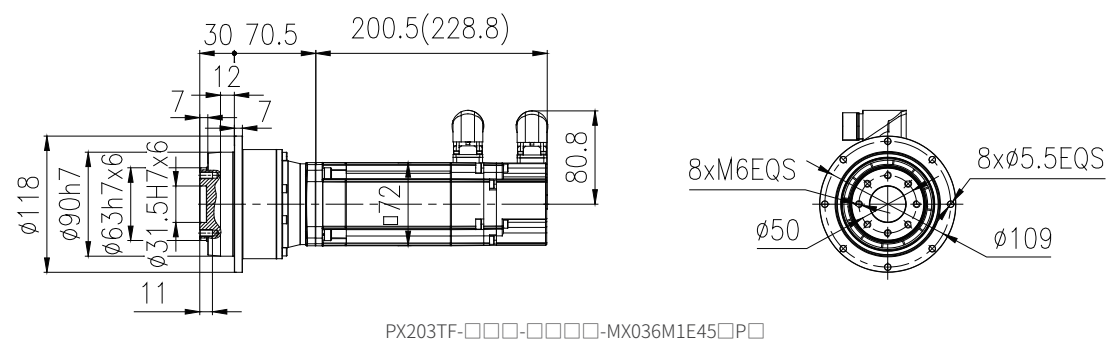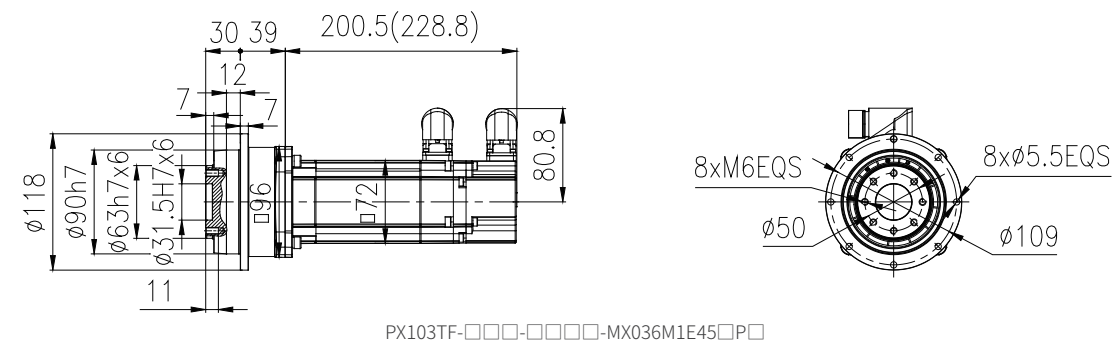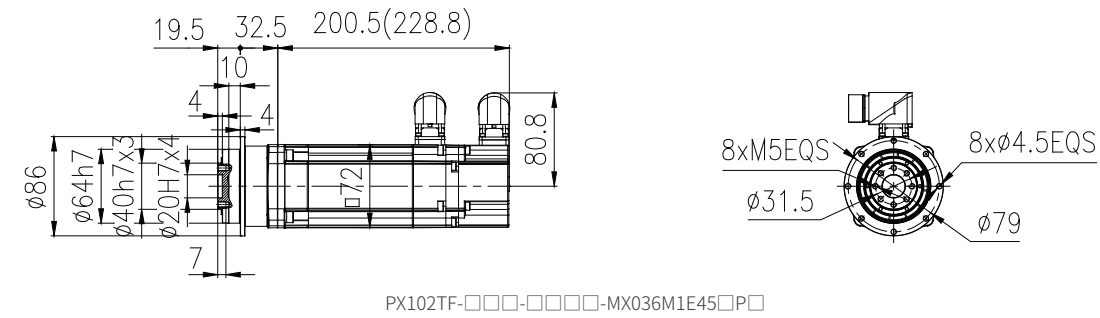

注: () 为带制动器尺寸

Note: () is the size with brake.

Outline dimension diagram of the equipped servo driver

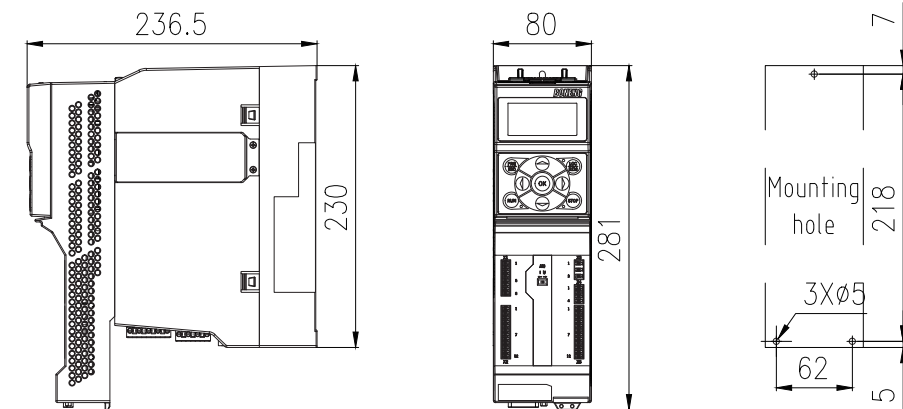

Control module: AX-CM55-PA-PE(ProfiNet) or
AX-CM55-EA-PE(EtherCAT)
Power module: AX-PM26-B3A75-N(Without filter) or
AX-PM26-B3A75-F(With filter)
Operator module: A1-OP25

伺服马达：1.32KW 2.8Nm
2.8A 4500r/min






Servo motor: 1.32KW 2.8Nm
2.8A 4500r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox Output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox Maximum acceleration torque	Gearbox maximum torque	Gearbox Emergency stop torque	Gearbox rotational inertia	Gearbox Maximum return clearance	Gearbox Service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
1125	10.9	B40	4	4/4	28	66	85	110	2.64	4	2.58
900	13.6	B50	5	5/1	28	66	85	110	2.6	4	2.06
1125	10.9	B40	4	4/1	85	175	200	260	3.11	3	7.82
900	13.6	B50	5	5/1	85	175	215	260	2.91	3	6.26
643	19.0	B70	7	7/1	85	175	215	260	2.72	3	4.47
450	27.2	C10	10	10/1	85	135	180	235	2.63	3	3.13
281	42.2	C16	16	16/1	105	160	160	260	2.65	4	2.49
225	52.7	C20	20	20/1	105	160	160	260	2.61	4	1.99
180	65.9	C25	25	25/1	120	160	160	260	2.6	4	1.82
281	42.2	C16	16	16/1	255	360	360	625	3.01	3	6.05
225	52.7	C20	20	20/1	270	360	360	625	2.84	3	5.12
180	65.9	C25	25	25/1	280	360	360	625	2.81	3	4.25
161	73.8	C28	28	28/1	270	360	360	625	2.69	3	3.66
129	92.3	C35	35	35/1	290	360	360	625	2.68	3	3.14
113	105.4	C40	40	40/1	290	360	360	625	2.61	3	2.75
90	131.8	C50	50	50/1	290	360	360	625	2.6	3	2.20
64	184.5	C70	70	70/1	290	360	360	625	2.6	3	1.57
161	73.8	C28	28	28/1	550	825	825	1300	3.1	2	7.45
129	92.3	C35	35	35/1	545	825	825	1300	3.06	2	5.91
113	105.4	C40	40	40/1	600	825	825	1300	2.82	2	5.69
90	131.8	C50	50	50/1	585	825	825	1300	2.79	2	4.44
64	184.5	C70	70	70/1	585	800	800	1300	2.77	2	3.17
45	263.6	D10	100	100/1	480	590	590	1250	2.76	2	1.82

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达 信号线	伺服马达 动力线	
Planetary precision servo gearmotor Oder number	Servo Drive Order Number			Servo Motor Cable Configuration Order Number		Servo Drive Braking Resistor Order Number
	Power module	Operator panel	Control module	Servo motor Signal line	Servo motor power line	
PX102T□-B40-□□1□-MX048S1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX102T□-B50-□□1□-MX048S1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103T□-B40-□□1□-MX048S1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103T□-B50-□□1□-MX048S1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103T□-B70-□□1□-MX048S1E45FP3	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103T□-C10-□□1□-MX048S1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203T□-C16-□□1□-MX048S1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203T□-C20-□□1□-MX048S1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203T□-C25-□□1□-MX048S1E45FP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C16-□□1□-MX048S1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C20-□□1□-MX048S1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C25-□□1□-MX048S1E45FP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C28-□□1□-MX048S1E45FP3	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C35-□□1□-MX048S1E45FP3	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C40-□□1□-MX048S1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C50-□□1□-MX048S1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C70-□□1□-MX048S1E45FP4	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C28-□□1□-MX048S1E45LP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C35-□□1□-MX048S1E45LP1	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C40-□□1□-MX048S1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C50-□□1□-MX048S1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C70-□□1□-MX048S1E45LP2	AX-PM26-B3B22-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18

Without filter N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
			With battery	13	B50(5m)	With brake	16	B50(5m)
With filter F	53	PA	Without battery	14	B70(7m)			B70(7m)
			With battery	15	C10(10m)			C10(10m)
					C15(15m)			C15(15m)
					C20(20m)			C20(20m)
					C30(30m)			C30(30m)
					C40(40m)			C40(40m)
					C50(50m)			C50(50m)


MX048S Outline dimension diagram (mm)

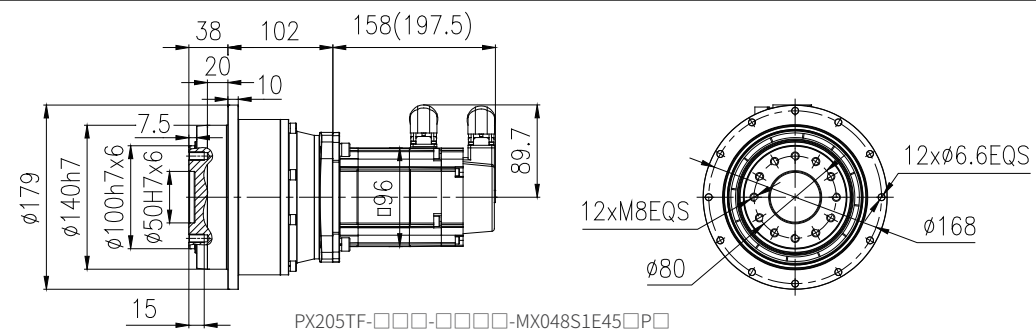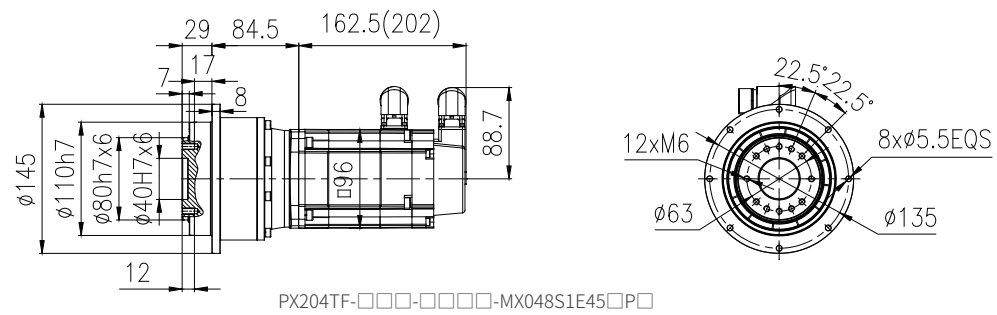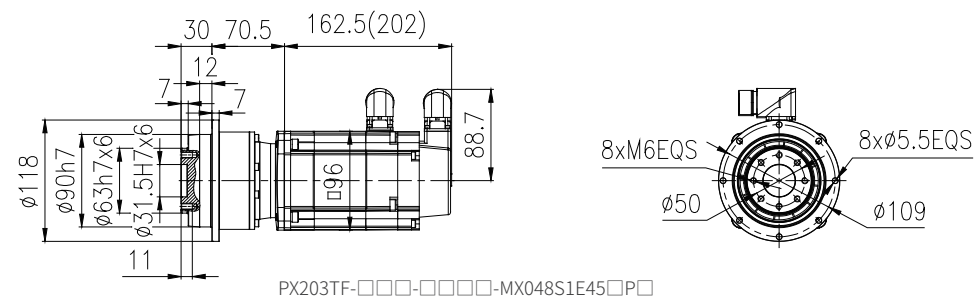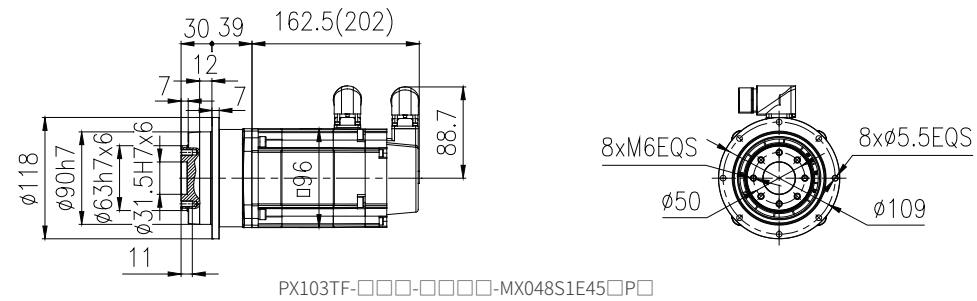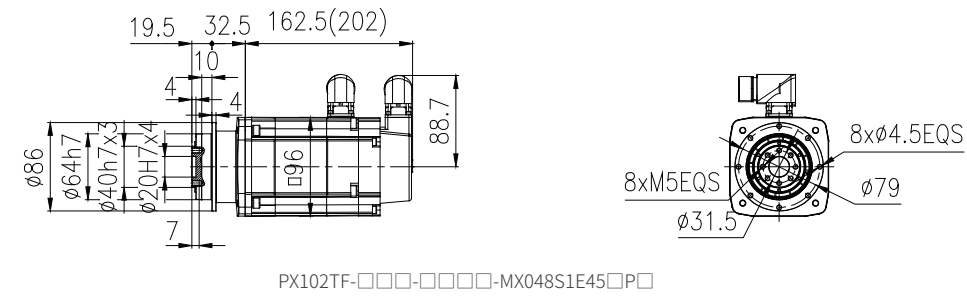

注： () 为带制动器尺寸

Note: () is the size with brake.

Outline dimension diagram of the equipped servo driver

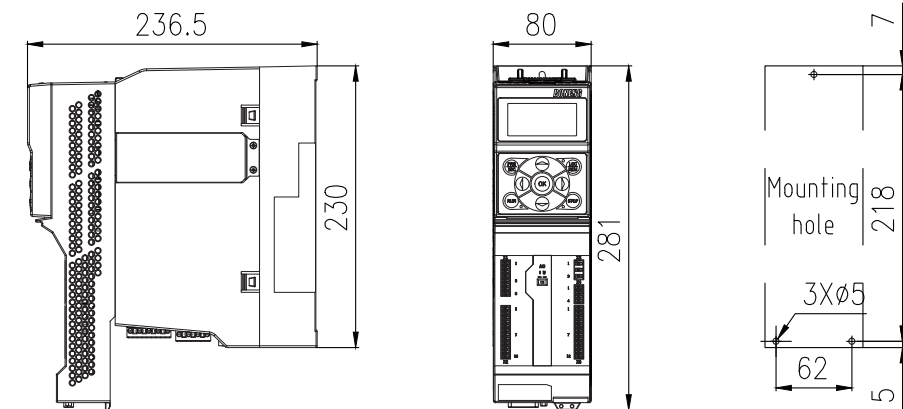

Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT)
Power module: AX-PM26-B3B22-N(Without filter) or AX-PM26-B3B22-F(With filter)
Operator module: A1-OP25







伺服马达：1.55KW 3.3Nm
3.3A 4500r/min

Servo motor: 1.55KW 3.3Nm
3.3A 4500r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox Output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox Maximum acceleration torque	Gearbox maximum torque	Gearbox Emergency stop torque	Gearbox rotational inertia	Gearbox Maximum return clearance	Gearbox Service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{20T} N.m	J_1 kgcm ²	J_t arcmin	f
1125	12.8	B40	4	4/1	28	66	85	110	4.96	4	2.19
900	16.0	B50	5	5/1	28	66	85	110	4.95	4	1.76
1125	12.8	B40	4	4/1	85	175	200	260	5.43	3	6.66
900	16.0	B50	5	5/1	85	175	215	260	5.23	3	5.33
643	22.3	B70	7	7/1	85	175	215	260	5.04	3	3.81
450	31.9	C10	10	10/1	85	135	180	235	4.95	3	2.66
281	49.5	C16	16	16/1	105	160	160	260	4.97	4	2.12
225	61.9	C20	20	20/1	105	160	160	260	4.93	4	1.70
180	77.4	C25	25	25/1	120	160	160	260	4.92	4	1.55
281	49.5	C16	16	16/1	255	360	360	625	5.33	3	5.15
225	61.9	C20	20	20/1	270	360	360	625	5.16	3	4.36
180	77.4	C25	25	25/1	280	360	360	625	5.13	3	3.62
161	86.7	C28	28	28/1	270	360	360	625	5.01	3	3.12
129	108.3	C35	35	35/1	290	360	360	625	5	3	2.68
113	123.8	C40	40	40/1	290	360	360	625	4.93	3	2.34
90	154.8	C50	50	50/1	290	360	360	625	4.92	3	1.87
64	216.7	C70	70	70/1	290	360	360	625	4.92	3	1.34
161	86.7	C28	28	28/1	550	825	825	1300	5.42	2	6.35
129	108.3	C35	35	35/1	545	825	825	1300	5.38	2	5.03
113	123.8	C40	40	40/1	600	825	825	1300	5.14	2	4.85
90	154.8	C50	50	50/1	585	825	825	1300	5.11	2	3.78
64	216.7	C70	70	70/1	585	800	800	1300	5.09	2	2.70
45	309.5	D10	100	100/1	480	590	590	1250	5.08	2	1.55

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达信号线	伺服马达动力线	
Planetary precision servo gearmotor Oder number	Servo Drive Order Number			Servo Motor Cable Configuration Order Number		Servo Drive Braking Resistor Order Number
	Power module	Operator panel	Control module	Servo motor Signal line	Servo motor power line	
PX102T□-B40-□□1□-MX048M1E45FP1	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX102T□-B50-□□1□-MX048M1E45FP1	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103T□-B40-□□1□-MX048M1E45FP2	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103T□-B50-□□1□-MX048M1E45FP2	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103T□-B70-□□1□-MX048M1E45FP3	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103T□-C10-□□1□-MX048M1E45FP4	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203T□-C16-□□1□-MX048M1E45FP1	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203T□-C20-□□1□-MX048M1E45FP1	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX203T□-C25-□□1□-MX048M1E45FP1	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C16-□□1□-MX048M1E45FP2	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C20-□□1□-MX048M1E45FP2	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C25-□□1□-MX048M1E45FP2	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C28-□□1□-MX048M1E45FP3	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C35-□□1□-MX048M1E45FP3	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C40-□□1□-MX048M1E45FP4	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C50-□□1□-MX048M1E45FP4	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C70-□□1□-MX048M1E45FP4	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C28-□□1□-MX048M1E45LP2	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C35-□□1□-MX048M1E45LP1	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C40-□□1□-MX048M1E45LP2	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C50-□□1□-MX048M1E45LP2	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C70-□□1□-MX048M1E45LP2	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-D10-□□1□-MX048M1E45LP2	AX-PM26-B3B22-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

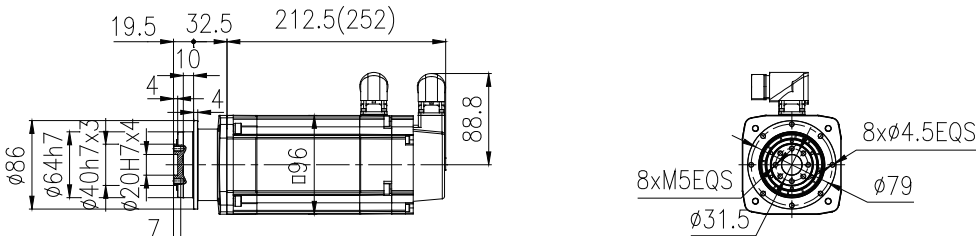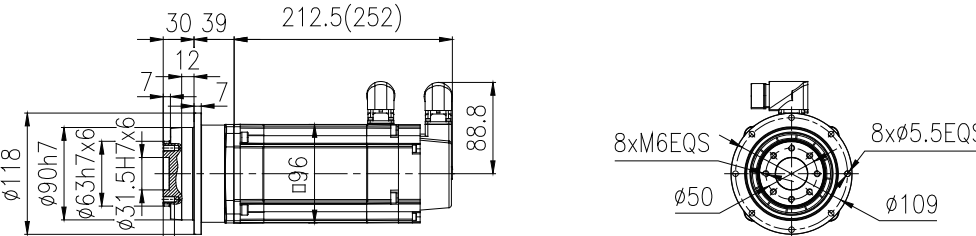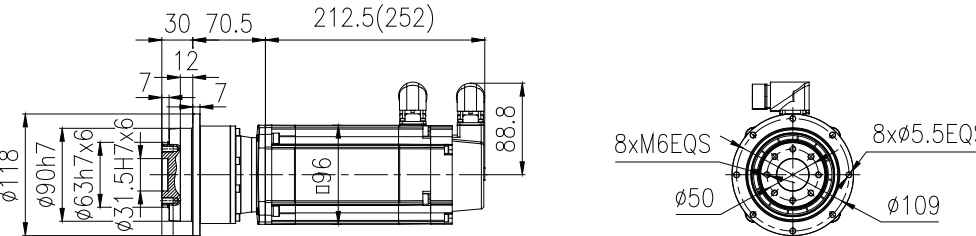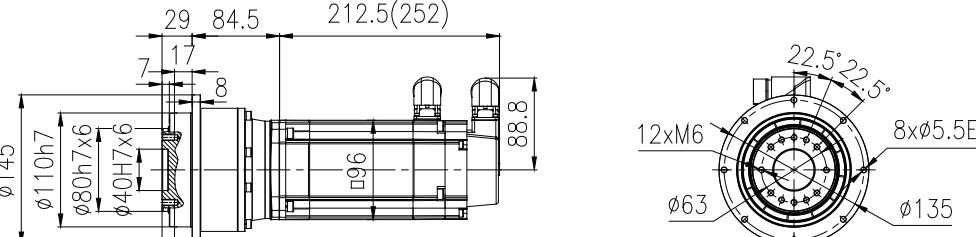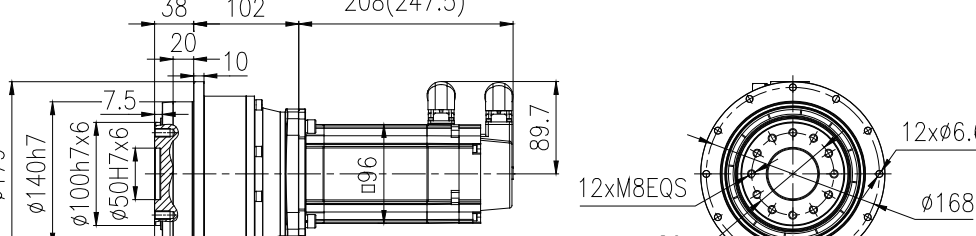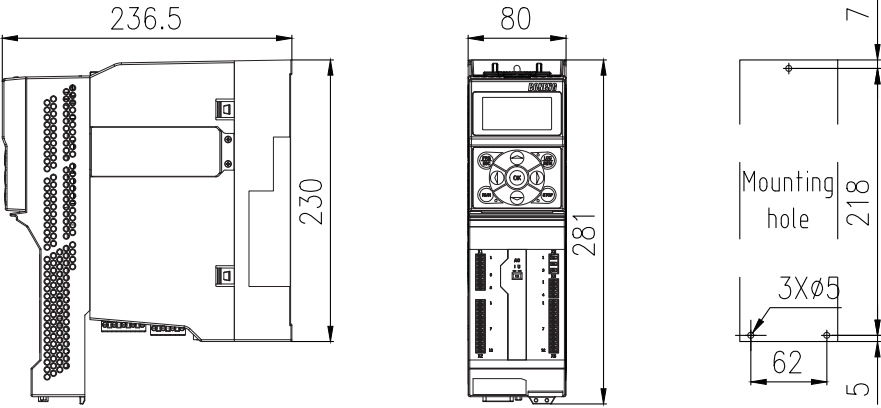MX048M Outline dimension diagram (mm)	Outline dimension diagram of the equipped servo driver
 PX102TF-□□□-□□□□-MX048M1E45□□□	
 PX103TF-□□□-□□□□-MX048M1E45□□□	
 PX203TF-□□□-□□□□-MX048M1E45□□□	
 PX204TF-□□□-□□□□-MX048M1E45□□□	
 PX205TF-□□□-□□□□-MX048M1E45□□□	 Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3B22-N(Without filter) or AX-PM26-B3B22-F(With filter) Operator module: A1-OP25

注： () 为带制动器尺寸 Note: () is the size with brake.







伺服马达：1.7KW 5.4Nm
3.6A 3000r/min

Servo motor: 1.7KW 5.4Nm
3.6A 3000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox Output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox Maximum acceleration torque	Gearbox maximum torque	Gearbox Emergency stop torque	Gearbox rotational inertia	Gearbox Maximum return clearance	Gearbox Service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
750	21.0	B40	4	4/1	85	175	200	260	7.94	3	4.05
600	26.2	B50	5	5/1	85	175	215	260	7.74	3	3.24
429	36.7	B70	7	7/1	85	175	215	260	7.55	3	2.31
300	52.5	C10	10	10/1	85	135	180	235	7.46	3	1.62
750	21.0	B40	4	4/1	180	390	485	625	9.25	2	8.57
600	26.2	B50	5	5/1	180	390	485	625	8.59	2	6.86
429	36.7	B70	7	7/1	180	390	485	625	7.99	2	4.90
300	52.5	C10	10	10/1	180	320	485	625	7.68	2	3.43
188	81.5	C16	16	16/1	255	360	360	625	7.84	3	3.13
150	101.8	C20	20	20/1	270	360	360	625	7.67	3	2.65
120	127.3	C25	25	25/1	280	360	360	625	7.64	3	2.20
107	142.6	C28	28	28/1	270	360	360	625	7.52	3	1.89
86	178.2	C35	35	35/1	290	360	360	625	7.51	3	1.63
75	203.7	C40	40	40/1	290	360	360	625	7.44	3	1.42
60	254.6	C50	50	50/1	290	360	360	625	7.43	3	1.14
429	35.6	B70	7	7/1	330	850	950	1300	9.6	2	9.26
300	50.9	C10	10	10/1	330	650	750	1250	8.49	2	6.48
188	81.5	C16	16	16/1	470	825	825	1300	8.88	2	5.77
150	101.8	C20	20	20/1	495	825	825	1300	8.47	2	4.86
120	127.3	C25	25	25/1	495	825	825	1300	8.37	2	3.89
107	142.6	C28	28	28/1	550	825	825	1300	7.93	2	3.86
86	178.2	C35	35	35/1	545	825	825	1300	7.89	2	3.06
75	203.7	C40	40	40/1	600	825	825	1300	7.65	2	2.95
60	254.6	C50	50	50/1	585	825	825	1300	7.62	2	2.30
43	356.4	C70	70	70/1	585	800	800	1300	7.6	2	1.64

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达 信号线	伺服马达 动力线	
Planetary precision servo gearmotor Oder number	Servo Drive Order Number			Servo Motor Cable Configuration Order Number		Servo Drive Braking Resistor Order Number
	Power module	Operator panel	Control module	Servo motor Signal line	Servo motor power line	
PX103T□-B40-□□1□-MX063S1E30FP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103T□-B50-□□1□-MX063S1E30FP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103T□-B70-□□1□-MX063S1E30FP2	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX103T□-C10-□□1□-MX063S1E30FP3	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX104T□-B40-□□1□-MX063S1E30FP4	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX104T□-B50-□□1□-MX063S1E30FP4	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX104T□-B70-□□1□-MX063S1E30FP5	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX104T□-C10-□□1□-MX063S1E30FP6	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C16-□□1□-MX063S1E30FP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C20-□□1□-MX063S1E30FP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C25-□□1□-MX063S1E30FP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C28-□□1□-MX063S1E30FP2	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C35-□□1□-MX063S1E30FP2	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C40-□□1□-MX063S1E30FP3	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX204T□-C50-□□1□-MX063S1E30FP3	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX105T□-B70-□□1□-MX063S1E30LP2	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX105T□-C10-□□1□-MX063S1E30LP1	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C16-□□1□-MX063S1E30FP4	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C20-□□1□-MX063S1E30FP4	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C25-□□1□-MX063S1E30FP4	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C28-□□1□-MX063S1E30FP5	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C35-□□1□-MX063S1E30FP5	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C40-□□1□-MX063S1E30FP6	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C50-□□1□-MX063S1E30FP6	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18
PX205T□-C70-□□1□-MX063S1E30FP6	AX-PM26-B3B30-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A15-K-D18

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

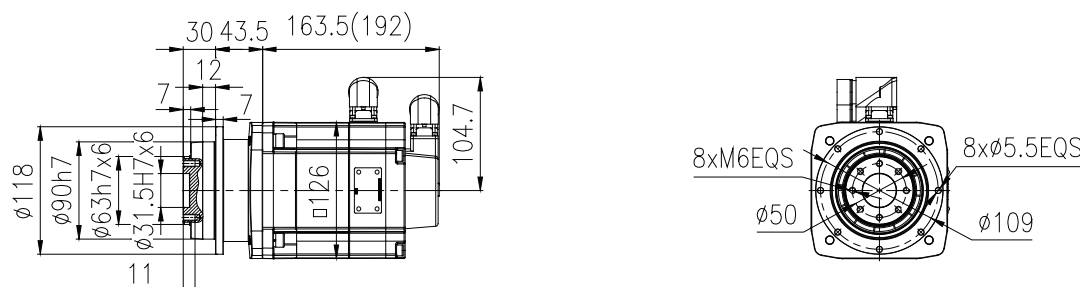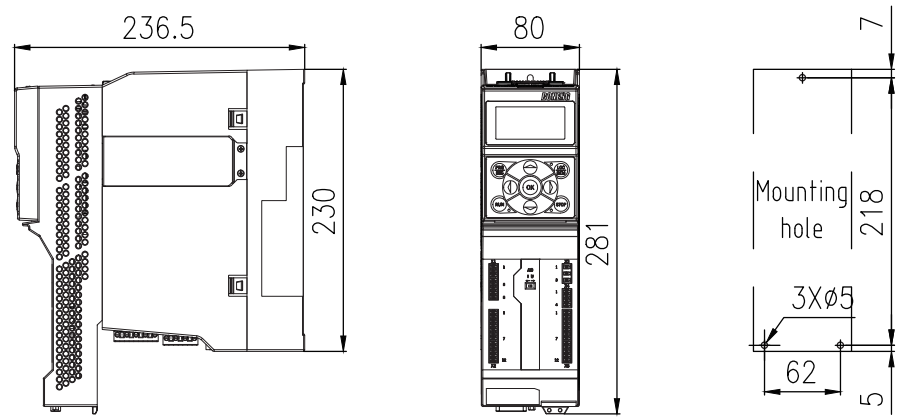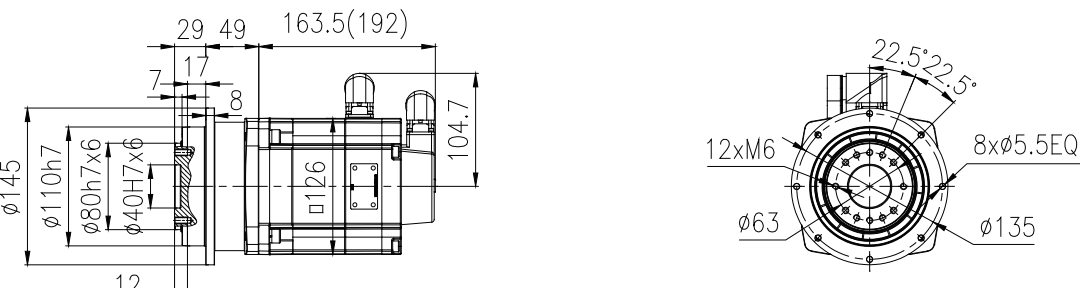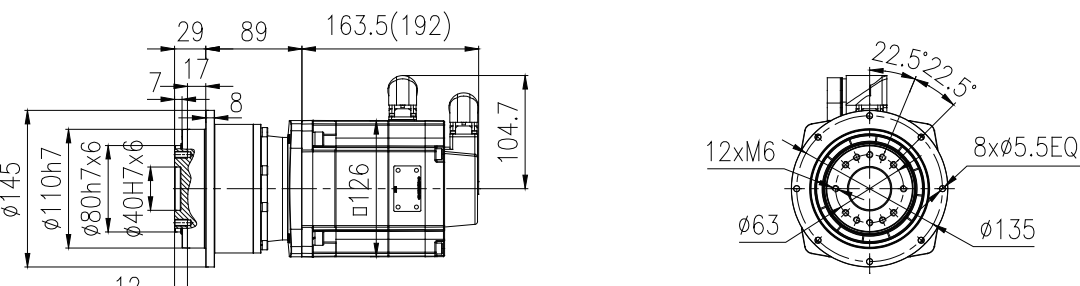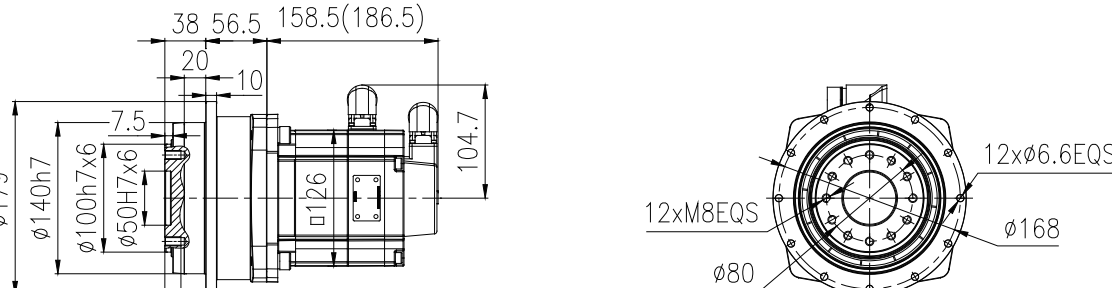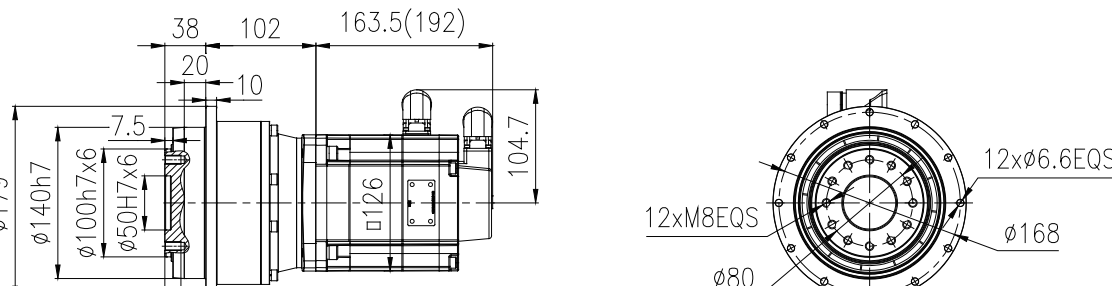MX063S Outline dimension diagram (mm)		Outline dimension diagram of the equipped servo driver	
 PX103TF-□□□-□□□□-MX063S1E30□P□		 Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3B30-N(Without filter) or AX-PM26-B3B30-F(With filter) Operator module: A1-OP25	
 PX104TF-□□□-□□□□-MX063S1E30□P□			
 PX204TF-□□□-□□□□-MX063S1E30FP1			
 PX105TF-□□□-□□□□-MX063S1E30□P□			
 PX205TF-□□□-□□□□-MX063S1E30□P□			

注：（）为带制动器尺寸

Note:（） is the size with brake.

伺服马达：2.76KW 8.8Nm
6A 3000r/min

Servo motor: 2.76KW 8.8Nm
6A 3000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox Output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox Maximum acceleration torque	Gearbox maximum torque	Gearbox Emergency stop torque	Gearbox rotational inertia	Gearbox Maximum return clearance	Gearbox Service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
750	34.1	B40	4	4/1	85	175	200	260	14.67	3	2.49
600	42.6	B50	5	5/1	85	175	215	260	14.47	3	1.99
750	34.1	B40	4	4/1	180	390	485	625	15.98	2	5.28
600	42.6	B50	5	5/1	180	390	485	625	15.32	2	4.22
429	59.7	B70	7	7/1	180	390	485	625	14.72	2	3.02
300	85.2	C10	10	10/1	180	320	485	625	14.41	2	2.11
188	132.3	C16	16	16/1	255	360	360	625	14.57	3	1.93
150	165.3	C20	20	20/1	270	360	360	625	14.4	3	1.63
120	206.7	C25	25	25/1	280	360	360	625	14.37	3	1.35
429	57.9	B70	7	7/1	330	850	950	1300	16.33	2	5.70
300	85.2	C10	10	10/1	330	650	750	1250	15.22	2	3.87
188	132.3	C16	16	16/1	470	825	825	1300	15.61	2	3.55
150	165.3	C20	20	20/1	495	825	825	1300	15.2	2	2.99
120	206.7	C25	25	25/1	495	825	825	1300	15.1	2	2.40
107	231.5	C28	28	28/1	550	825	825	1300	14.66	2	2.38
86	289.3	C35	35	35/1	545	825	825	1300	14.62	2	1.88
75	330.7	C40	40	40/1	600	825	825	1300	14.38	2	1.81
60	413.3	C50	50	50/1	585	825	825	1300	14.35	2	1.42
43	578.7	C70	70	70/1	585	800	800	1300	14.33	2	1.01

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达 信号线	伺服马达 动力线	
Planetary precision servo gearmotor Oder number	Servo Drive Order Number			Servo Motor Cable Configuration Order Number		Servo Drive Braking Resistor Order Number
	Power module	Operator panel	Control module	Servo motor Signal line	Servo motor power line	
PX103T□-B40-□□1□-MX063M1E30FP1	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX103T□-B50-□□1□-MX063M1E30FP1	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX104T□-B40-□□1□-MX063M1E30FP2	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX104T□-B50-□□1□-MX063M1E30FP2	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX104T□-B70-□□1□-MX063M1E30FP3	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX104T□-C10-□□1□-MX063M1E30FP4	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX204T□-C16-□□1□-MX063M1E30FP1	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX204T□-C20-□□1□-MX063M1E30FP1	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX204T□-C25-□□1□-MX063M1E30FP1	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX105T□-B70-□□1□-MX063M1E30LP1	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX105T□-C10-□□1□-MX063M1E30LP2	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205T□-C16-□□1□-MX063M1E30FP2	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205T□-C20-□□1□-MX063M1E30FP2	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205T□-C25-□□1□-MX063M1E30FP2	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205T□-C28-□□1□-MX063M1E30FP3	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205T□-C35-□□1□-MX063M1E30FP3	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205T□-C40-□□1□-MX063M1E30FP4	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205T□-C50-□□1□-MX063M1E30FP4	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10
PX205T□-C70-□□1□-MX063M1E30FP4	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A15-□□□	A1-H02-A30-K-D10

Without filter N	55	EA	Without battery 12	B30(3m)	Without brake 18	B30(3m)
With filter F		PA	With battery 13	B50(5m)	With brake 16	B50(5m)
	53	PA	Without battery 14	B70(7m)		B70(7m)
			With battery 15	C10(10m)		C10(10m)
				C15(15m)		C15(15m)
				C20(20m)		C20(20m)
				C30(30m)		C30(30m)
				C40(40m)		C40(40m)
				C50(50m)		C50(50m)

MX063M Outline dimension diagram (mm)		Outline dimension diagram of the equipped servo driver	
PX103TF-□□□-□□□□-MX063M1E30□P□		236.5, 100, 291, 298, 80, 6, 281, 4x5, 4 Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3B55-N(Without filter) or AX-PM26-B3B55-F(With filter) Operator module: A1-OP25	
PX104TF-□□□-□□□□-MX063M1E30□P□			
PX204TF-□□□-□□□□-MX063M1E30□P□			
PX105TF-□□□-□□□□-MX063M1E30□P□			
PX205TF-□□□-□□□□-MX063M1E30□P□			

注： () 为带制动器尺寸

Note: () is the size with brake.

伺服马达：3.24KW 10.3Nm
7.1A 3000r/min





Servo motor: 3.24KW 10.3Nm
7.1A 3000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox Output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox Maximum acceleration torque	Gearbox maximum torque	Gearbox Emergency stop torque	Gearbox rotational inertia	Gearbox Maximum return clearance	Gearbox Service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
750	40.0	B40	4	4/1	180	390	485	625	27.38	2	4.50
600	50.0	B50	5	5/1	180	390	485	625	26.72	2	3.60
429	70.0	B70	7	7/1	180	390	485	625	26.12	2	2.57
300	100.0	C10	10	10/1	180	320	485	625	25.81	2	1.80
750	40.0	B40	4	4/1	355	850	1000	1300	32.23	2	8.87
600	50.0	B50	5	5/1	360	850	1000	1300	29.85	2	7.20
429	70.0	B70	7	7/1	330	850	950	1300	27.73	2	4.71
300	100.0	C10	10	10/1	330	650	750	1250	26.62	2	3.30
188	155.3	C16	16	16/1	470	825	825	1300	27.01	2	3.03
150	194.1	C20	20	20/1	495	825	825	1300	26.6	2	2.55
120	242.6	C25	25	25/1	495	825	825	1300	26.5	2	2.04
107	271.7	C28	28	28/1	550	825	825	1300	26.06	2	2.02
86	339.7	C35	35	35/1	545	825	825	1300	26.02	2	1.60
75	388.2	C40	40	40/1	600	825	825	1300	25.78	2	1.55
60	485.2	C50	50	50/1	585	825	825	1300	25.75	2	1.21
107	271.7	C28	28	28/1	1900	3000	3200	5550	30.72	2	6.99
86	339.7	C35	35	35/1	1900	3000	3900	5550	30.42	2	5.59
75	388.2	C40	40	40/1	1900	3000	3000	5550	28.14	2	4.89
60	485.2	C50	50	50/1	1900	3000	3700	5550	27.99	2	3.92
43	679.3	C70	70	70/1	1700	2600	2600	5550	27.86	2	2.50
30	970.4	D10	100	100/1	1700	2200	2200	5550	27.78	2	1.75

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达 信号线	伺服马达 动力线	
Planetary precision servo gearmotor Oder number	Servo Drive Order Number			Servo Motor Cable Configuration Order Number		Servo Drive Braking Resistor Order Number
	Power module	Operator panel	Control module	Servo motor Signal line	Servo motor power line	
PX104T□-B40-□□1□-MX080S1E30FP1	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX104T□-B50-□□1□-MX080S1E30FP1	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX104T□-B70-□□1□-MX080S1E30FP2	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX104T□-C10-□□1□-MX080S1E30FP3	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX105T□-B40-□□1□-MX080S1E30FP4	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX105T□-B50-□□1□-MX080S1E30FP4	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX105T□-B70-□□1□-MX080S1E30FP5	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX105T□-C10-□□1□-MX080S1E30FP6	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205T□-C16-□□1□-MX080S1E30FP1	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205T□-C20-□□1□-MX080S1E30FP1	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205T□-C25-□□1□-MX080S1E30FP1	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205T□-C28-□□1□-MX080S1E30FP2	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205T□-C35-□□1□-MX080S1E30FP2	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205T□-C40-□□1□-MX080S1E30FP3	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX205T□-C50-□□1□-MX080S1E30FP3	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX207T□-C28-□□1□-MX080S1E30LP1	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX207T□-C35-□□1□-MX080S1E30LP1	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX207T□-C40-□□1□-MX080S1E30LP2	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX207T□-C50-□□1□-MX080S1E30LP2	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX207T□-C70-□□1□-MX080S1E30LP2	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10
PX207T□-D10-□□1□-MX080S1E30LP2	AX-PM26-B3B55-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A30-K-D10

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)


MX080S Outline dimension diagram(mm)

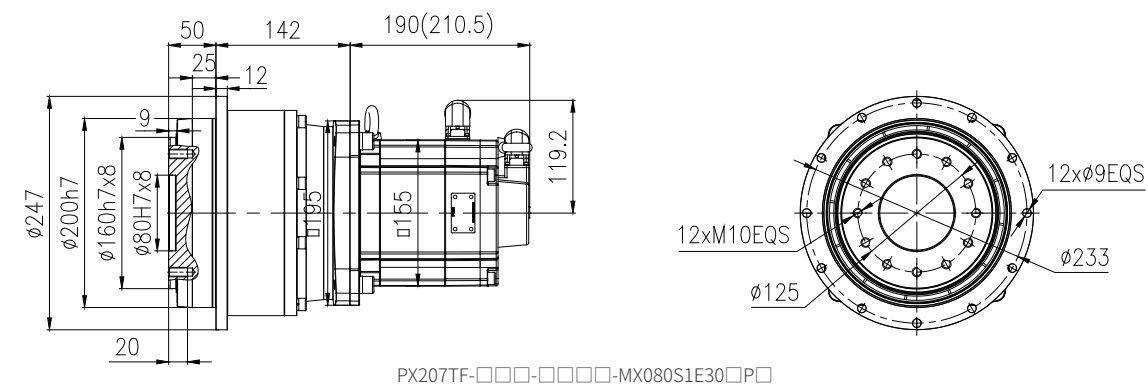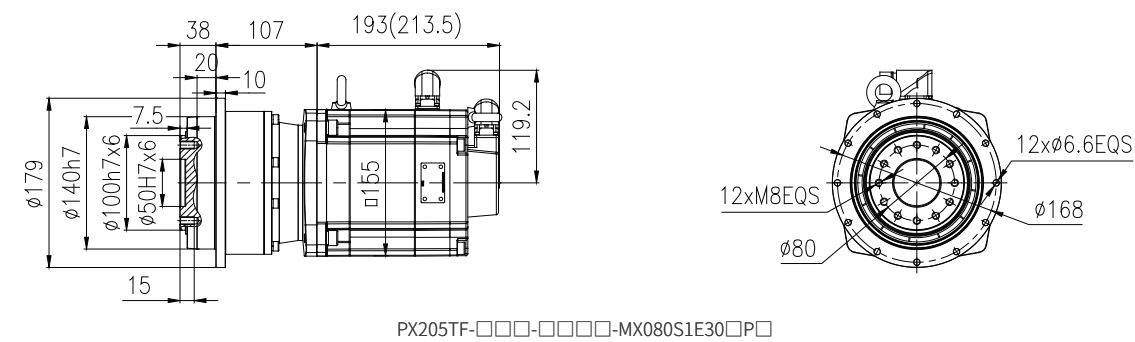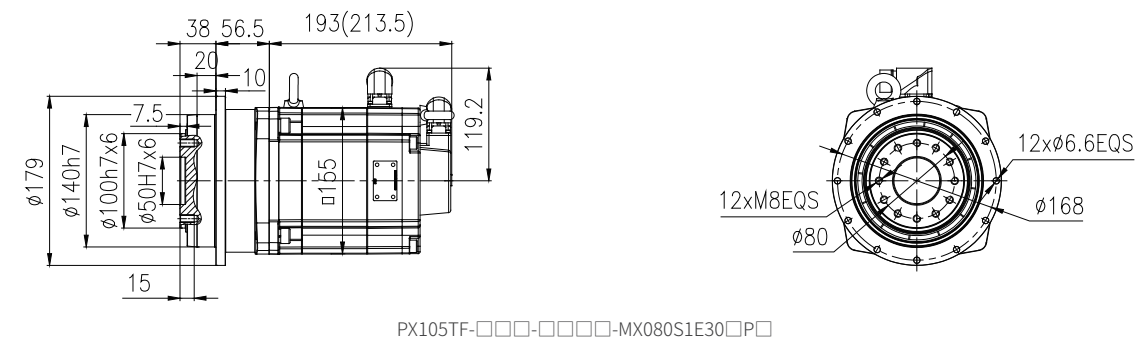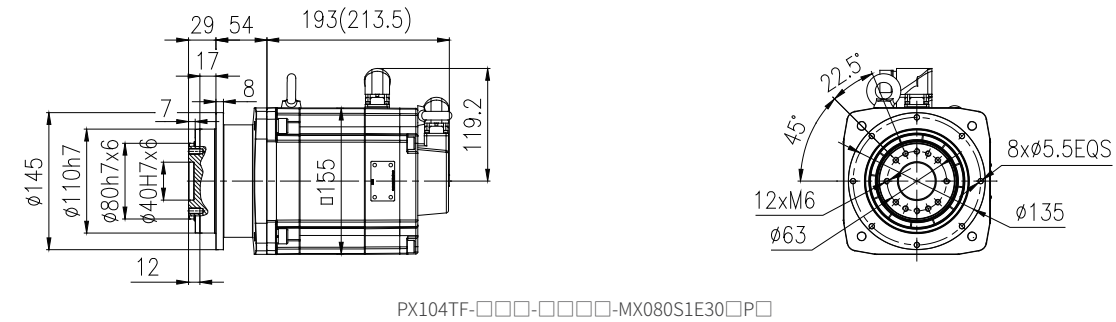

注: () 为带制动器尺寸

Note: () is the size with brake.

Outline dimension diagram of the equipped servo driver

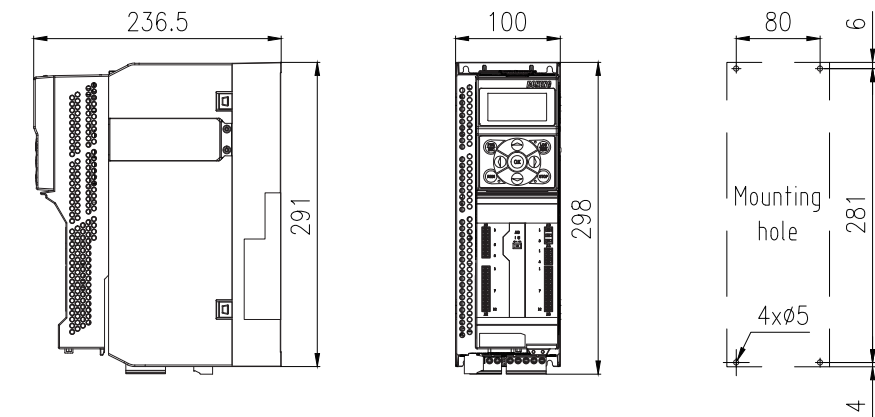

Control module: AX-CM55-PA-PE(ProfiNet) or
AX-CM55-EA-PE(EtherCAT)
Power module: AX-PM26-B3B55-N(Without filter) or
AX-PM26-B3B55-F (With filter)
Operator module: A1-OP25





伺服马达：5.03KW 16Nm
9.6A 3000r/min

Servo motor: 5.03KW 16Nm
9.6A 3000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox Output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox Maximum acceleration torque	Gearbox maximum torque	Gearbox Emergency stop torque	Gearbox rotational inertia	Gearbox Maximum return clearance	Gearbox Service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
750	62.1	B40	4	4/1	180	390	485	625	50.78	2	2.90
600	77.7	B50	5	5/1	180	390	485	625	50.12	2	2.32
429	108.7	B70	7	7/1	180	390	485	625	49.52	2	1.66
750	62.1	B40	4	4/1	355	850	1000	1300	55.63	2	5.71
600	77.7	B50	5	5/1	360	850	1000	1300	53.25	2	4.64
429	108.7	B70	7	7/1	330	850	950	1300	51.13	2	3.04
300	155.3	C10	10	10/1	330	650	750	1250	50.02	2	2.12
188	241.1	C16	16	16/1	470	825	825	1300	50.41	2	1.95
150	301.3	C20	20	20/1	495	825	825	1300	50	2	1.64
120	376.6	C25	25	25/1	495	825	825	1300	49.9	2	1.31
107	421.8	C28	28	28/1	550	825	825	1300	49.46	2	1.30
86	527.3	C35	35	35/1	545	825	825	1300	49.42	2	1.03
188	241.1	C16	16	16/1	1900	3000	3200	5550	64.39	2	7.88
150	301.3	C20	20	20/1	1900	3100	3200	5550	58.94	2	6.31
120	376.6	C25	25	25/1	1900	3100	3900	5550	58.35	2	5.04
107	421.8	C28	28	28/1	1900	3000	3200	5550	54.12	2	4.50
86	527.3	C35	35	35/1	1900	3000	3900	5550	53.82	2	3.60
75	602.6	C40	40	40/1	1900	3000	3000	5550	51.54	2	3.15
60	753.3	C50	50	50/1	1900	3000	3700	5550	51.39	2	2.52
43	1054.6	C70	70	70/1	1700	2600	2600	5550	51.26	2	1.61
30	1506.6	D10	100	100/1	1700	2200	2200	5550	51.18	2	1.13


行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达 信号线	伺服马达 动力线	
Planetary precision servo gearmotor Oder number	Servo Drive Order Number			Servo Motor Cable Configuration Order Number		Servo Drive Braking Resistor Order Number
	Power module	Operator panel	Control module	Servo motor Signal line	Servo motor power line	
PX104T□-B40-□□1□-MX080M1E30FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX104T□-B50-□□1□-MX080M1E30FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX104T□-B70-□□1□-MX080M1E30FP2	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX105T□-B40-□□1□-MX080M1E30FP3	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX105T□-B50-□□1□-MX080M1E30FP3	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX105T□-B70-□□1□-MX080M1E30FP4	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX105T□-C10-□□1□-MX080M1E30FP5	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX205T□-C16-□□1□-MX080M1E30FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX205T□-C20-□□1□-MX080M1E30FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX205T□-C25-□□1□-MX080M1E30FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX205T□-C28-□□1□-MX080M1E30FP2	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX205T□-C35-□□1□-MX080M1E30FP2	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207T□-C16-□□1□-MX080M1E30LP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207T□-C20-□□1□-MX080M1E30LP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207T□-C25-□□1□-MX080M1E30LP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207T□-C28-□□1□-MX080M1E30LP2	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207T□-C35-□□1□-MX080M1E30LP2	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207T□-C40-□□1□-MX080M1E30LP3	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207T□-C50-□□1□-MX080M1E30LP3	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207T□-C70-□□1□-MX080M1E30LP3	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75
PX207T□-D10-□□1□-MX080M1E30LP3	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A25-□□□	A1-H02-A40-K-C75

Without filter	N	55	EA	Without battery	12	B30(3m)	Without brake	18	B30(3m)
With filter	F		PA	With battery	13	B50(5m)	With brake	16	B50(5m)
		53	PA	Without battery	14	B70(7m)			B70(7m)
				With battery	15	C10(10m)			C10(10m)
						C15(15m)			C15(15m)
						C20(20m)			C20(20m)
						C30(30m)			C30(30m)
						C40(40m)			C40(40m)
						C50(50m)			C50(50m)

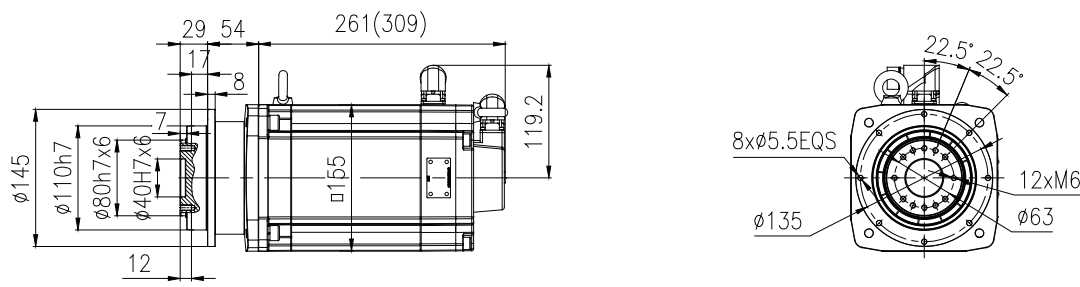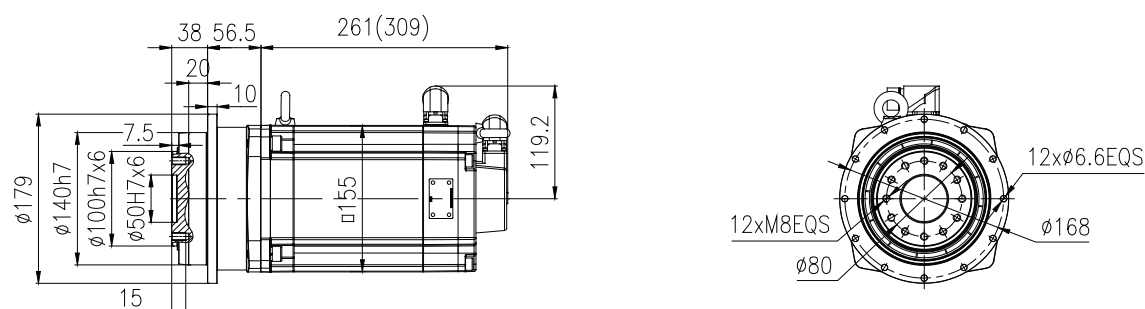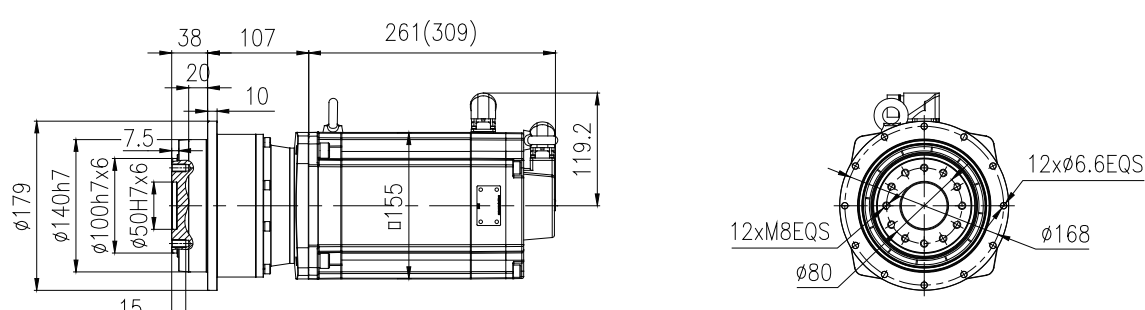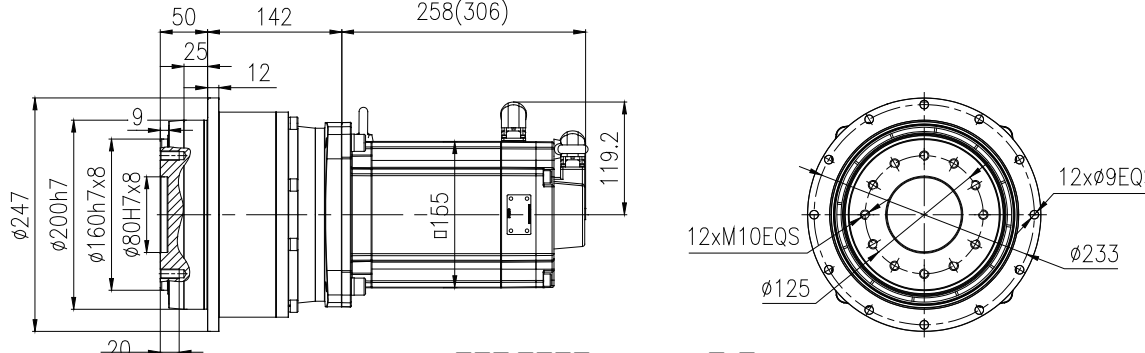MX080M Outline dimension diagram (mm)	
 PX104TF-□□□-□□□□-MX080M1E30□P□	
 PX105TF-□□□-□□□□-MX080M1E30□P□	
 PX205TF-□□□-□□□□-MX080M1E30□P□	
 PX207TF-□□□-□□□□-MX080M1E30□P□	

注：（）为带制动器尺寸

Note: () is the size with brake.

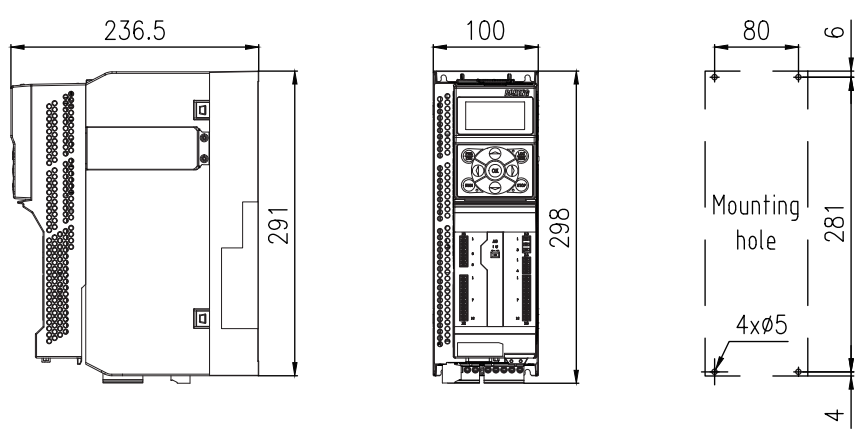Outline dimension diagram of the equipped servo driver	
	
Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3B75-N(Without filter) or AX-PM26-B3B75-F (With filter) Operator module: A1-OP25	

伺服马达: 5.03KW 24Nm
10.1A 2000r/min

Servo motor: 5.03KW 24Nm
10.1A 2000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox Output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox Maximum acceleration torque	Gearbox maximum torque	Gearbox Emergency stop torque	Gearbox rotational inertia	Gearbox Maximum return clearance	Gearbox Service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
500	93.2	B40	4	4/1	355	850	1000	1300	94.23	2	3.81
400	116.5	B50	5	5/1	360	850	1000	1300	91.85	2	3.09
286	163.1	B70	7	7/1	330	850	950	1300	89.73	2	2.02
200	233.0	C10	10	10/1	330	650	750	1250	88.62	2	1.42
125	361.6	C16	16	16/1	1900	3000	3200	5550	102.99	2	5.25
100	452.0	C20	20	20/1	1900	3100	3200	5550	97.54	2	4.20
80	565.0	C25	25	25/1	1900	3100	3900	5550	96.95	2	3.36
71	632.8	C28	28	28/1	1900	3000	3200	5550	92.72	2	3.00
57	791.0	C35	35	35/1	1900	3000	3900	5550	92.42	2	2.40
50	904.0	C40	40	40/1	1900	3000	3000	5550	90.14	2	2.10
40	1129.9	C50	50	50/1	1900	3000	3700	5550	89.99	2	1.68
29	1581.9	C70	70	70/1	1700	2600	2600	5550	89.86	2	1.07

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达 信号线	伺服马达 动力线	
Planetary precision servo gearmotor Oder number	Servo Drive Order Number			Servo Motor Cable Configuration Order Number		Servo Drive Braking Resistor Order Number
	Power module	Operator panel	Control module	Servo motor Signal line	Servo motor power line	
PX105T□-B40-□□1□-MX100S1E20FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX105T□-B50-□□1□-MX100S1E20FP1	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX105T□-B70-□□1□-MX100S1E20FP2	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX105T□-C10-□□1□-MX100S1E20FP3	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207T□-C16-□□1□-MX100S1E20FP4	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207T□-C20-□□1□-MX100S1E20FP4	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207T□-C25-□□1□-MX100S1E20FP4	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207T□-C28-□□1□-MX100S1E20FP5	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207T□-C35-□□1□-MX100S1E20FP5	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207T□-C40-□□1□-MX100S1E20FP6	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207T□-C50-□□1□-MX100S1E20FP6	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75
PX207T□-C70-□□1□-MX100S1E20FP6	AX-PM26-B3B75-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A40-K-C75

Without filter N With filter F	55	EA	Without battery 12	B30(3m)	Without brake 18	B30(3m)
		PA	With battery 13	B50(5m)	With brake 16	B50(5m)
53	PA	Without battery 14	B70(7m)			B70(7m)
		With battery 15	C10(10m)			C10(10m)
			C15(15m)			C15(15m)
			C20(20m)			C20(20m)
			C30(30m)			C30(30m)
			C40(40m)			C40(40m)
			C50(50m)			C50(50m)

MX100S Outline dimension diagram (mm)	Outline dimension diagram of the equipped servo driver
PX105TF-□□□-□□□□-MX100S1E20□P□ PX207TF-□□□-□□□□-MX100S1E20□P□	Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3B75-N(Without filter) or AX-PM26-B3B75-F(With filter) Operator module: A1-OP25

注：（）为带制动器尺寸

Note：（） is the size with brake.




伺服马达：7.96KW 38Nm
17.3A 2000r/min

Servo motor: 7.96KW 38Nm
17.3A 2000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox Output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox Maximum acceleration torque	Gearbox maximum torque	Gearbox Emergency stop torque	Gearbox rotational inertia	Gearbox Maximum return clearance	Gearbox Service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 $kgcm^2$	J_t arcmin	f
500	147.5	B40	4	4/1	355	850	1000	1300	176.7	2	2.41
400	184.3	B50	5	5/1	360	850	1000	1300	174.32	2	1.95
125	572.2	C16	16	16/1	1900	3000	3200	5550	185.46	2	3.32
100	715.3	C20	20	20/1	1900	3100	3200	5550	180.01	2	2.66
80	894.1	C25	25	25/1	1900	3100	3900	5550	179.42	2	2.13
71	1001.4	C28	28	28/1	1900	3000	3200	5550	175.19	2	1.90
57	1251.7	C35	35	35/1	1900	3000	3900	5550	174.89	2	1.52
50	1430.5	C40	40	40/1	1900	3000	3000	5550	172.61	2	1.33
40	1788.1	C50	50	50/1	1900	3000	3700	5550	172.46	2	1.06

行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达 信号线	伺服马达 动力线	
Planetary precision servo gearmotor Oder number	Servo Drive Order Number			Servo Motor Cable Configuration Order Number		Servo Drive Braking Resistor Order Number
	Power module	Operator panel	Control module	Servo motor Signal line	Servo motor power line	
PX105T□-B40-□□1□-MX100M1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX105T□-B50-□□1□-MX100M1E20FP1	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207T□-C16-□□1□-MX100M1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207T□-C20-□□1□-MX100M1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207T□-C25-□□1□-MX100M1E20FP2	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207T□-C28-□□1□-MX100M1E20FP3	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207T□-C35-□□1□-MX100M1E20FP3	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207T□-C40-□□1□-MX100M1E20FP4	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207T□-C50-□□1□-MX100M1E20FP4	AX-PM26-B3C15-□	A1-OP25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36

Without filter N	55	EA	Without battery 12	B30(3m)	Without brake 18	B30(3m)
With filter F		PA	With battery 13	B50(5m)	With brake 16	B50(5m)
	53	PA	Without battery 14	B70(7m)		B70(7m)
			With battery 15	C10(10m)		C10(10m)
				C15(15m)		C15(15m)
				C20(20m)		C20(20m)
				C30(30m)		C30(30m)
				C40(40m)		C40(40m)
				C50(50m)		C50(50m)

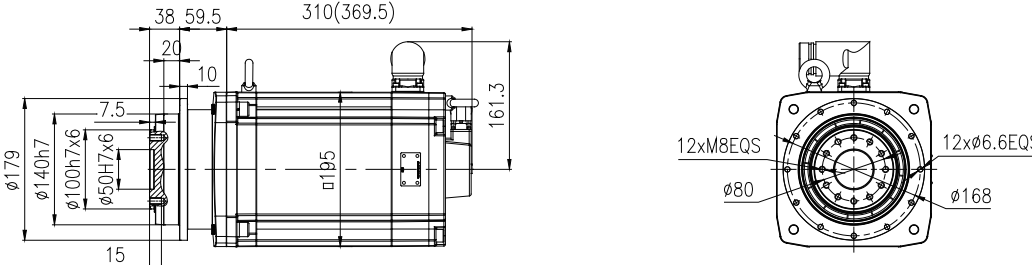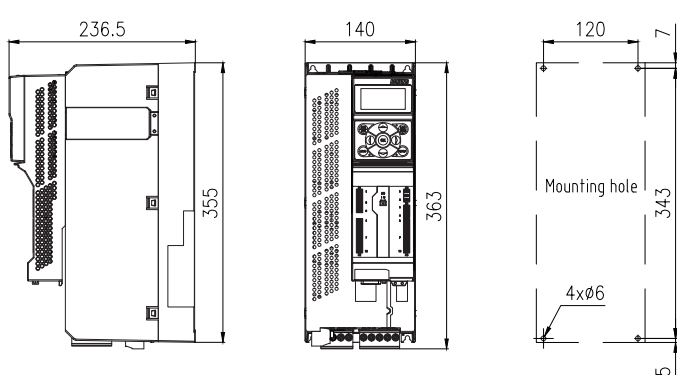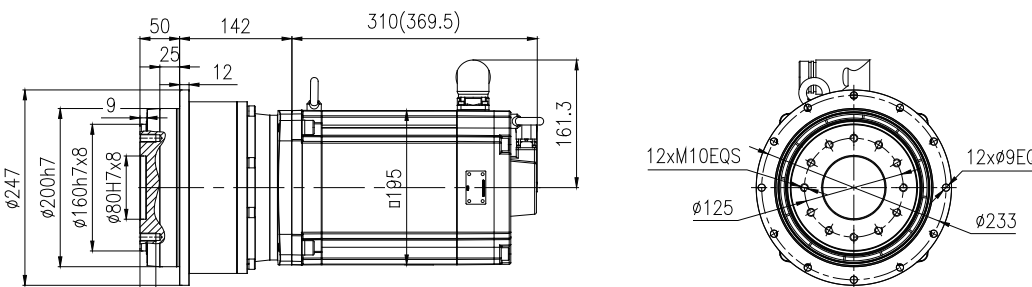MX100M Outline dimension diagram (mm)		Outline dimension diagram of the equipped servo driver	
 PX105TF-□□□-□□□□-MX100M1E20□P□		 Control module: AX-CM55-PA-PE(ProfiNet) or AX-CM55-EA-PE(EtherCAT) Power module: AX-PM26-B3C15-N(Without filter) or AX-PM26-B3C15-F(With filter) Operator module: A1-OP25	
 PX207TF-□□□-□□□□-MX100M1E20□P□			

注：（）为带制动器尺寸

Note: () is the size with brake.

伺服马达：10.06KW 48Nm
19.6A 2000r/min


Servo motor: 10.06KW 48Nm
19.6A 2000r/min

齿轮箱 输出转速	齿轮箱 输出扭矩	齿轮箱 速比代号	齿轮箱 公称速比	齿轮箱 精确速比	齿轮箱 额定扭矩	齿轮箱最大 加速扭矩	齿轮箱 最大扭矩	齿轮箱 急停扭矩	齿轮箱 转动惯量	齿轮箱最大 回程间隙	齿轮箱 服务系数
Gearbox output speed	Gearbox Output torque	Gearbox speed ratio code	Gearbox nominal speed ratio	Gearbox accurate speed ratio	Gearbox ated torque	Gearbox Maximum acceleration torque	Gearbox maximum torque	Gearbox Emergency stop torque	Gearbox rotational inertia	Gearbox Maximum return clearance	Gearbox Service factor
n_{2N} r/min	T_2 N.m	Code	i	i_{ex}	T_{2N} N.m	T_{2B} N.m	T_{2a} N.m	T_{2NOT} N.m	J_1 kgcm ²	J_t arcmin	f
500	186.4	B40	4	4/1	355	850	1000	1300	259.17	2	1.90
400	233.0	B50	5	5/1	360	850	1000	1300	256.79	2	1.55
286	326.2	B70	7	7/1	1700	2950	3900	5950	266.63	2	5.21
200	466.0	C10	10	10/1	1700	2300	2900	5950	259.56	2	3.65
125	723.2	C16	16	16/1	1900	3000	3200	5550	267.93	2	2.63
100	904.0	C20	20	20/1	1900	3100	3200	5550	262.48	2	2.10
80	1129.9	C25	25	25/1	1900	3100	3900	5550	261.89	2	1.68
71	1265.5	C28	28	28/1	1900	3000	3200	5550	257.66	2	1.50
57	1581.9	C35	35	35/1	1900	3000	3900	5550	257.36	2	1.20
50	1807.9	C40	40	40/1	1900	3000	3000	5550	255.08	2	1.05


行星精密齿轮伺服马达订货号	伺服驱动器订货号			伺服马达线缆配置订货号		伺服驱动器 制动电阻订货号
	功率模块	操作面板	控制模块	伺服马达 信号线	伺服马达 动力线	
Planetary precision servo gearmotor Oder number	Servo Drive Order Number			Servo Motor Cable Configuration Order Number		Servo Drive Braking Resistor Order Number
	Power module	Operator panel	Control module	Servo motor Signal line	Servo motor power line	
PX105T□-B40-□□1□-MX100L1E20FP1	AX-PM26-B3C15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX105T□-B50-□□1□-MX100L1E20FP1	AX-PM26-B3C15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX107T□-B70-□□1□-MX100L1E20LP1	AX-PM26-B3C15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX107T□-C10-□□1□-MX100L1E20LP2	AX-PM26-B3C15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207T□-C16-□□1□-MX100L1E20FP2	AX-PM26-B3C15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207T□-C20-□□1□-MX100L1E20FP2	AX-PM26-B3C15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207T□-C25-□□1□-MX100L1E20FP2	AX-PM26-B3C15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207T□-C28-□□1□-MX100L1E20FP3	AX-PM26-B3C15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207T□-C35-□□1□-MX100L1E20FP3	AX-PM26-B3C15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36
PX207T□-C40-□□1□-MX100L1E20FP4	AX-PM26-B3C15-□	A1-0P25	AX-CM□□-□□-PE	A1-H17-A□□-□□□	A1-H□□-A40-□□□	A1-H02-A80-K-C36

Without filter N With filter F	55	EA	Without battery 12	B30(3m)	Without brake 18	B30(3m)
		PA	With battery 13	B50(5m)	With brake 16	B50(5m)
	53	PA	Without battery 14	B70(7m)		B70(7m)
			With battery 15	C10(10m)		C10(10m)
				C15(15m)		C15(15m)
				C20(20m)		C20(20m)
				C30(30m)		C30(30m)
				C40(40m)		C40(40m)
				C50(50m)		C50(50m)


MX100L Outline dimension diagram (mm)

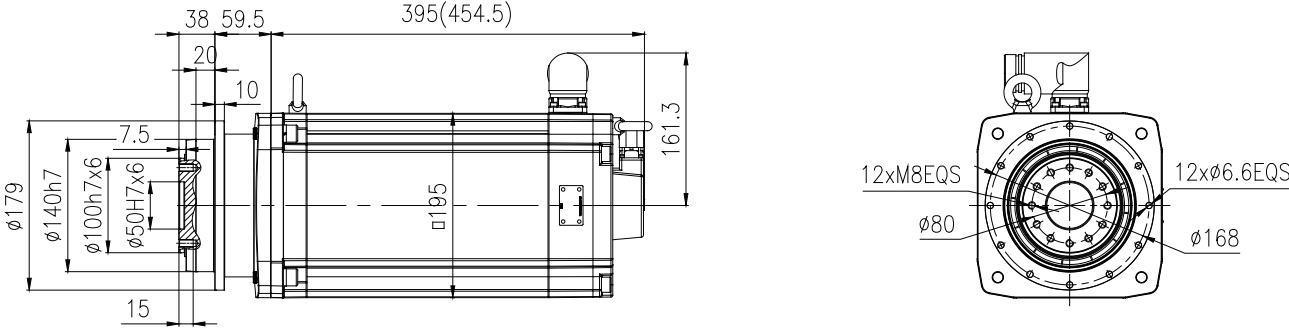

PX105TF-□□□-□□□□-MX100L1E20□P□

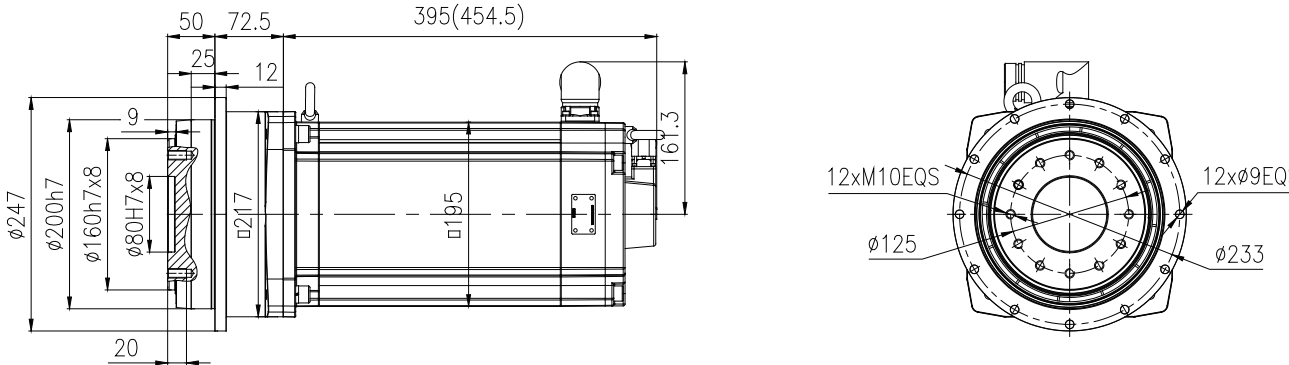

PX107TF-□□□-□□□□-MX100L1E20□P□

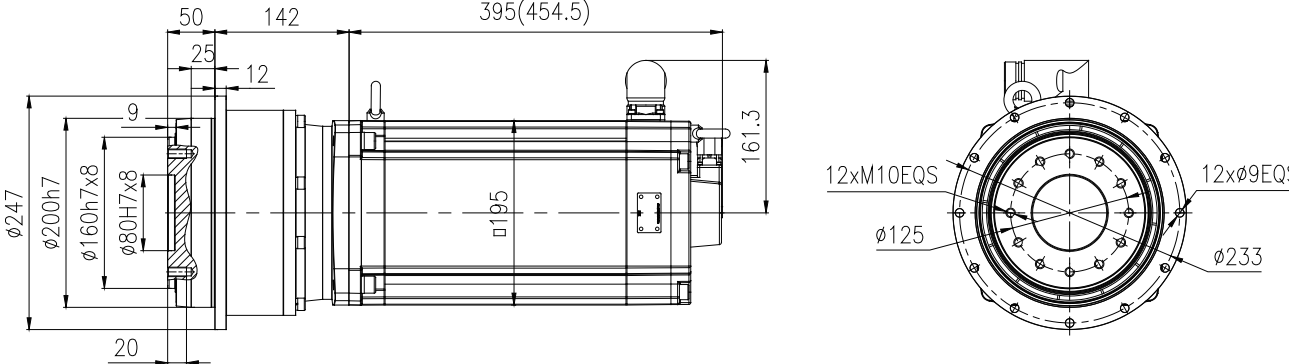


PX207TF-□□□-□□□□-MX100L1E20□P□

注：（）为带制动器尺寸

Note: () is the size with brake.

Outline dimension diagram of the equipped servo driver

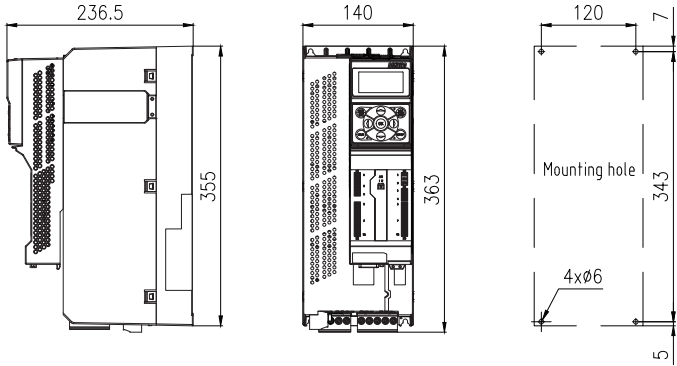

Control module: AX-CM55-PA-PE(ProfiNet) or
AX-CM55-EA-PE(EtherCAT)
Power module: AX-PM26-B3C15-N(Without filter) or
AX-PM26-B3C15-F(With filter)
Operator module: A1-OP25

9 输出轴允许的
轴向力和径向力

9 Permissible axial and radial
forces on the output shaft

输出轴 载荷	Output shaft load	代号 Code	单位 Unit	PX102T PX202T	PX103T PX203T	PX104T PX204T	PX105T PX205T	PX107T PX207T
20000h 的径向力	Radial force for 20000h	F _{r20000h}	N	1750	3050	4550	7050	22300
20000h 的轴向力	Axial force for 20000h	F _{a20000h}		2700	5050	6900	11650	18150
30000h 的径向力	Radial force for 30000h	F _{r30000h}		1550	2700	4000	6250	19750
30000h 的轴向力	Axial force for 30000h	F _{a30000h}	Nm	2400	4500	6100	10300	16050
20000h 的侧倾力矩	Tilting moment for 20000h	M _{k20000h}		111	258	484	592	2410
30000h 的侧倾力矩	Tilting moment for 30000h	M _{k30000h}		98	228	429	524	2133

10 重量表

10 Weight table

PX(T) 行星齿轮箱重量表 (Kg)							PX(T) Planetary Gearbox Weight table(Kg)						
机座号	Frame size	PX102T	PX103T	PX104T	PX105T	PX107T							
重量	Weight	1.2	3.3	5.7	10.5	26							
机座号	Frame size	PX202T	PX203T	PX204T	PX205T	PX207T							
重量	Weight	1.4	3.7	7.1	13.5	38							

直连 MX伺服马达重量表 (Kg)															Directly connected MX servo motor weight table(Kg)												
机座号	Frame size	MX 028S1	MX 028M1	MX 036S1	MX 036M1	MX 048S1	MX 048M1	MX 063S1	MX 063M1	MX 080S1	MX 080M1	MX 100S1	MX 100M1	MX 100L1													
额定功率(KW)	Rated power	0.38	0.54	0.66	0.8	1.32	1.55	1.7	2.76	3.24	5.03	5.03	7.96	10.06													
不带制动	Without brake	1.8	2.4	2.7	3.9	4.5	7	7.1	10.9	13.6	21.9	25.6	42.4	58.5													
带制动	With brake	2	2.7	3.1	4.3	5.2	7.7	8	11.8	14.3	23.9	27	47.2	63													


伺服驱动器

11 驱动器概述

AX精准系列伺服驱动器是专为高性能伺服应用设计的模块化伺服驱动器，搭配CM55/CM53控制模块，和适配不同功率伺服马达的功率模块及一些可选附件组成，灵活的模块化为使用者的系统设计及应用提供更丰富的选择。

AX伺服驱动器配合MX永磁同步伺服马达，可以做到精准的位置、速度、扭矩控制，AX伺服驱动器也可以驱动博能异步马达，实现精确的异步伺服控制。

AX精准系列伺服驱动器由三部分组成：

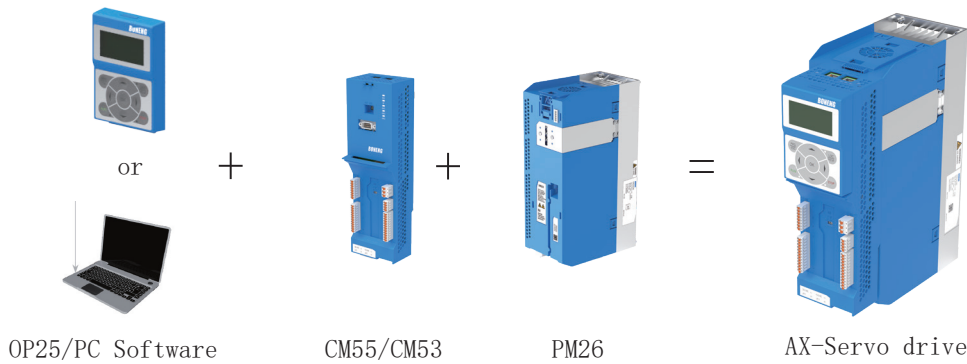

操作面板(OP25)或上位机调试软件BonengDrivesoft：操作面板或上位机调试软件可以为用户提供方便快捷的参数设定方法，支持汉字显示，更简单易懂的信息反馈，及高级示波器检测诊断功能。

控制模块(CM53/CM55)：控制模块为用户提供丰富的控制接口，输入输出端子，模拟信号，及通讯等，且通过多种方式可对所接入的马达进行控制和监视。

功率模块(PM26)：书本型功率模块功率范围从0.75kW-132kW，支持多种控制模块，使马达调速变得简单且灵活，且包含了完备的驱动器保护功能。

Servo Drive

11 Servo drive overview

AX precision series servo drive is modular designed for high-performance servo applications, consisting of a CM55/CM53 control module, a power module adapted to different power motors, and some optional accessories. AX series servo drive provides users with richer options for system design and application though its flexible modularization feature.

AX servo drive can achieve accurate position, speed, and torque control when combined with the MX permanent magnet synchronous servo motor, as well as drive the Boneng asynchronous motor to achieve accurate asynchronous servo control.

The AX servo drive consist of three parts:

Operation panel (OP25) or desktop software BongDrivesoft: operation panel and desktop software can provide users with convenient and efficient methods for parameters configuration. The OP25 and BonengDrivesoft can display in English and Chinese, and the Boneng-Drivesoft can also provide users with advanced functions such as oscilloscope, condition monitoring and diagnosis, and etc.

Control module (CM53/CM55): The control module contains a wealth of control interfaces, input and output terminals, analog signals, and can support communication bus control, which control the motor connected through the Power module.

Power module (PM26) : The power module has a power range from 0.75kW to 132kW, supports a variety of modules, which makes spindle speed adjustment easy and flexible. In addition, complete driver and motor protection functions are available for the power module.

12 驱动器整机安装尺寸图

12 Drive full machine mounting size


12.1 OP25+CM55+PM26

OP25+CM55+PM26组合的整机外形图及安装尺寸图，B1-B6功率范围，单位：mm


12.1 OP25+CM55+PM26

The overall appearance and installation dimension of OP25+CM55+PM26 combination, B1-B6 power range, with unit: mm.


B1(0.75kW-3kW):

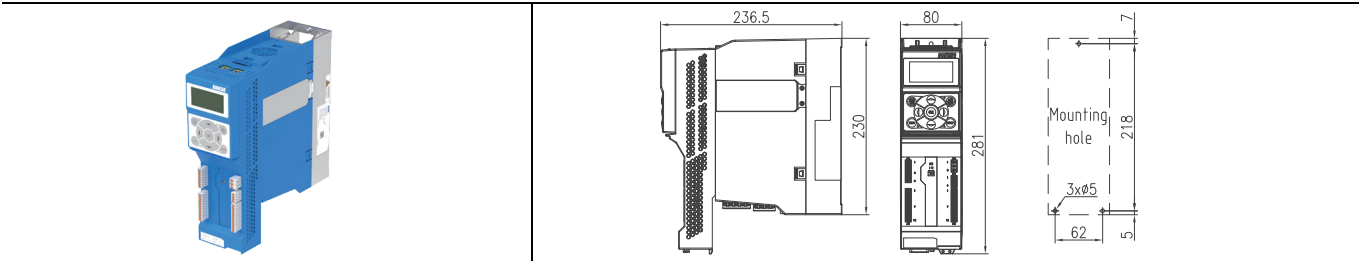


B2(4kW-7.5kW)

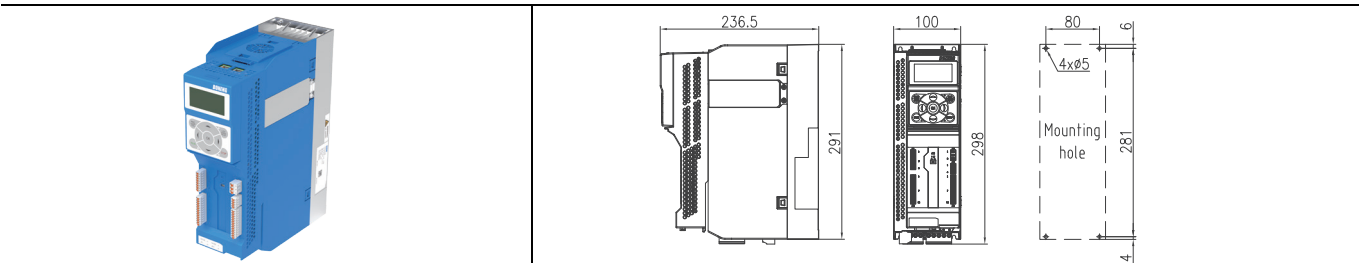


B3(11kW-15kW)

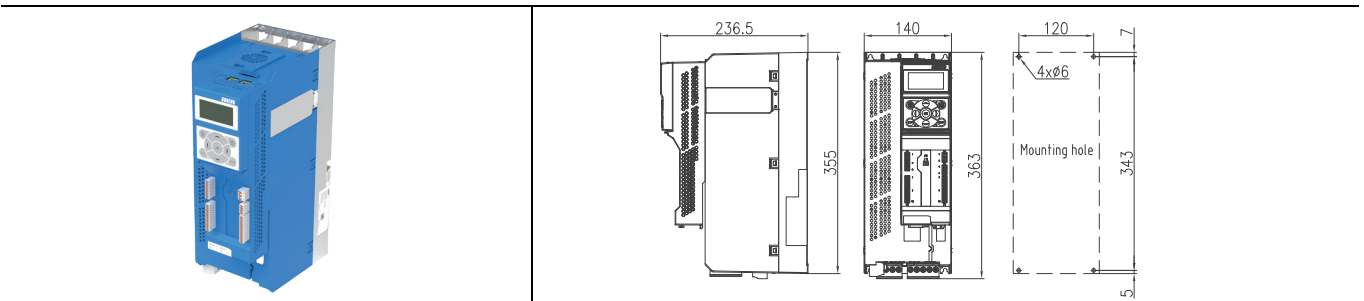

B4(18.5kW-37kW)














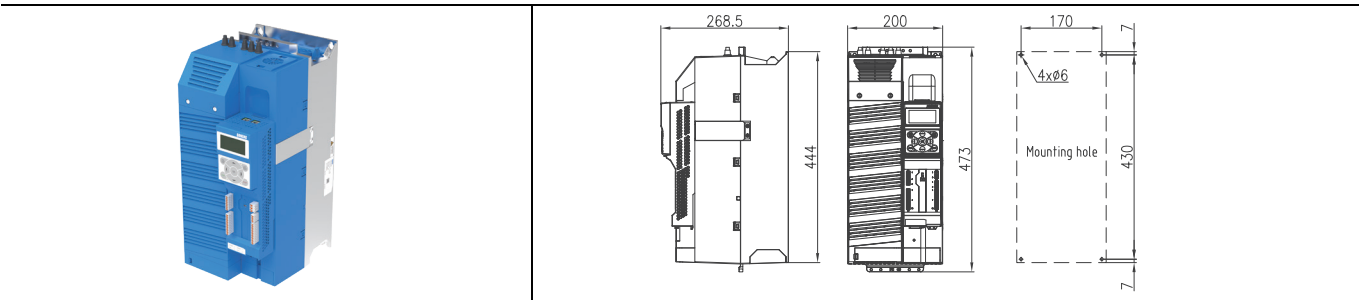


B6(45kW-132kW)

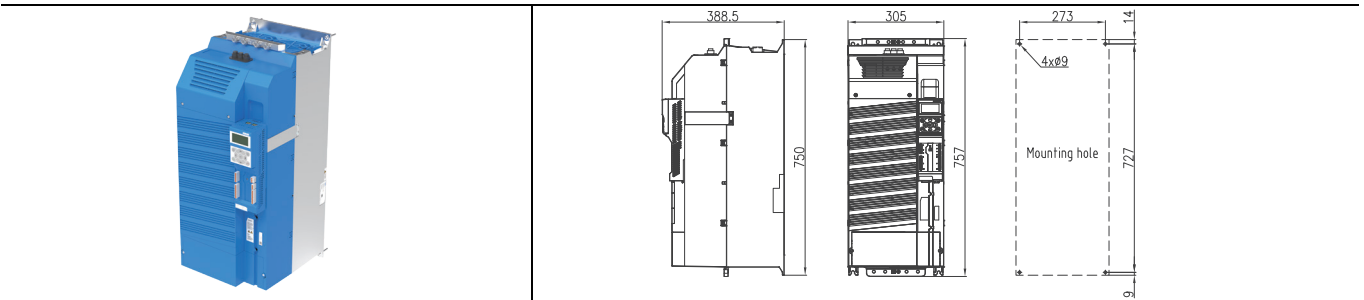

12.2 CM53+PM26
CM53+PM26组合的整机外形图及
安装尺寸图，单位：mm

12.2 CM53+PM26
The overall appearance and
installation dimension of
CM53+PM26 combination, with
unit:mm

B1(0.75kW-3kW):				
B2(4kW-7.5kW)				
B3(11kW-15kW)				
B4(18.5kW-37kW)				
B6(45kW-132kW)				

13 驱动器控制模块

13.1 控制模块CM55

13.1.1 概述

CM55模块是专为总线型伺服系统应用而设计的控制模块，支持EtherCAT及PROFINET通讯，PROFINET通讯支持RT及IRT应用，除了标准的同步伺服电机为还支持异步伺服定位。



CM55控制模块

13 Control module

13.1 Control module CM55

13.1.1 Information

The CM55 module is a control module designed specifically for bus type servo system applications, supporting EtherCAT and PROFINET communication.PROFINET communication supports RT and IRT applications, and in addition to standard synchronous servo motors, it also supports asynchronous servo positioning.

CM55 control module

13.1.2 控制模块型号表示方法

13.1.2 Designation rules and
nameplate for control module

博能精准系列伺服驱动器

Boneng AX-series
precision servo drive

控制模块

Control module

通讯协议

Communication protocal

EA=EtherCAT及博能
自定义通讯DriveLink
PA=PROFINET及博能
自定义通讯DriveLink

EA=EtherCAT and Boneng
defined DriveLink.
PA=PROFINET and Boneng
defined DriveLink

编码器接口

Encoder Interface

PE=增量式/绝对值编码器

PE=photoelectric incremental
/absolute encoder

AX-CM55-PA-PE

控制模块订货号

Control module order number

型号 Model	接口类型描述	Interface type description
AX-CM55-EA-PE	支持EtherCAT及博能 自定义DriveLink通讯， 增量/绝对式光电编码器	Support EtherCAT and Boneng defined DriveLink, incremental /absoluteoptical encoder.
AX-CM55-PA-PE	支持PROFINET及博能 自定义DriveLink通讯， 增量/绝对式光电编码器	Support PROFINET and Boneng defined DriveLink, incremental /absoluteoptical encoder.

13.1.3 控制模块技术参数

13.1.3 Technical date


功能	Functions			技术数据	Technical data
总线接口	Bus interface	AX-CM55-PA-PE	AX-CM55-PA-PE	• 支持PROFINET、DriveLink • RJ45接口	• PROFINET, DriveLink bus • RJ45 interface
		AX-CM55-EA-PE	AX-CM55-EA-PE	• 支持EtherCAT、DriveLink • RJ45接口	• EtherCAT, DriveLink bus • RJ45 interface
工作电源	Power supply	功率模块供电	By power module	• 数字量输入/输出端子作为输出使用时需外接24V电源	• DI/DO terminal as an output,an external 24v power supply is required
		外部端子供电	By external terminals	• 电压范围: DC 20.8 … 28.8V • 最大电流: 2.6A	• Voltage range: DC 20.8~28.8V • Maximum current: 2.6A
输出电源	Power output	+24V输出	+24V output	• 电压范围: DC 18V … 26.8V • 最大电流: 200mA	• Voltage range:DC 18V~26.8V • Maximum current: 200mA
		+10V输出	+10V output	• 电压范围: DC 9.5V … 10.5V • 最大电流: 40mA	• Voltage range:DC 9.5V~10.5V • Maximum current: 40mA
		DB15接口编码器电源	DB15 encoder power supply	• 电压: DC 5V或DC 24V • 最大电流: 350mA	• Voltage: DC 5V or DC 24V • Maximum current: 350mA
		RJ45接口编码器电源	RJ45 encoder power supply	• 电压: DC 5V • 最大电流: 200mA	• Voltage: DC 5V • Maximum current: 200mA
数字量输入	Digital input	11个 (DIO_DI10)	11 (DIO_DI10)	• DI1、DI3、DI5、DI7为非公共端子类型 • DIO、DI2、DI4、DI6公共端子DICOm0 • DI8、DI9、DI10公共端子DICOm1 • 电气隔离 • 支持Source和Sink模式 • 电压: DC 24V、AC 36V • "1"信号电压: >11V • "0"信号电压: <5V • 24V典型电流: 4mA • 响应时间: 6ms (含软件滤波)	• Differential inputs: DI1、DI3、DI5、DI7 • Single inputs: DIO、DI2、DI4、DI6 share DICOm0 • Single inputs: DI8、DI9、DI10 share DICOm1 • Electrical isolation • Support Source and Sink mode • Voltage: DC 24V, AC 36V • Level"1"voltage: > 11V • Level"0"voltage: <5V • 24V typical current: 4mA • Response time: 6ms(Including software filter)
数字量输出	Digital output	1个继电器 (DO0)	1 relay (DO0)	• 电压: DC 24V、AC 220V • 连续电流: 2A • 切换电流: 2A • 触点类型: 1常开1常闭	• Voltage: DC 24V、AC 220V • Continous current: 2A • Switching current: 2A • Contact type: 1 nomally open and 1 close
数字量输入/输出	Bidirectional digital input and output	8个 (DIO20_DIO27)	8 (DIO20_DIO27)	• 电压: 最大DC 30V • 电流: 输出最大200mA, 24V输入典型4mA • 频率: 最大100Hz • 输入"1"信号电压: >15V • 输入"0"信号电压: <5V • 非电气隔离 • 外部供电端子需接24V	• Voltage: DC 30V maximum • Current output 200mA maximum, 24V input typical 4mA • Frequency:100Hz maximum • Input level"1" voltage: >15V • Input level"0"voltage: <5V • Non-electrically isolated • 24V power supply is needed for DIO
模拟量输入	Analog input	1个 (AI0)	1 (AI0)	• 差分输入 • 拨码开关切换电压和电流模式 • 电压型支持-10V … +10V、0V … 10V • 电流型支持0mA … 20mA、4mA … 20mA • 电流型内阻250Ω • 响应时间: 2ms (含软件滤波) • 精度: ±1%	• Differential input • Dip switch to choose voltage and current mode • Voltage range(voltage mode): -10V~+10V、0V~10V • Current range(current mode): 0mA~20mA、4mA~20mA • Internal resistance in current mode: 250Ω • Response time: 2ms(including software filter) • Precision:±1%
温度传感器	Temperature sensor	2个	2	• 分别位于端子X5和X11 • 支持KTY84-130、PTC	• Respectively at the X5and X11 • Support KTY84-130、PTC
编码器信号输入	Encoder interface	ABZ	ABZ	• 支持24V的单端信号、5V和24V的差分信号 • 输入频率: 最大250kHz • 断线侦测: 仅支持差分类型 • 最大长度: 5V差分类型100m 24V开集极类型50m 24V推挽类型100m 24V差分类型300m	• 24V single-ended signal.5V and 24V differential signal • Input frequency:250kHz maximum • Disconnection detection: only support differential mode • Maximum wire length: 5V differential mode: 100m 24V open-collector type: 50m 24V push-pull: 100m 24V differential mode: 300m
		BISS-C	BISS-C	• 波特率: 最大4Mbps • 最大长度: 500kbps时100m	• Baud rate: 4 Mbps maximum • Maximum wire length: 100m at 500 kbps
		RS485	RS485	• 波特率: 最大2.5Mbps • 最大长度: 500kbps时100m	• Baud rate: 2.5 Mbps maximum • Maximum wire length: 100m at 500kbps
USB接口	USB interface	1个	1	• USB 2.0 • Mini-B	• USB 2.0 • Mini-B
指示灯	Status LEDs	2个双色指示灯	2two-color LEDs	• RDY指示灯: 红绿双色 • BF指示灯: 红绿双色	• RDY LED: red and green • BF LED: red and green
		3个单色指示灯	3single-color LEDs	• SAFE指示灯: 黄色 • LNK1指示灯: 绿色 • LNK2指示灯: 绿色	• SAFE LED: yellow • LNK1 LED: green • LNK2 LED: green
键盘接口	Keyboard interface	支持OP25	OP25 supported	• 可直接安装或外引安装	• Install directly or external with extension cable
工作温度	Use ambient temperature	-20℃ … +50℃	-20℃ … +50℃		
存储温度	Storage temperature	-40℃ … +70℃	-40℃ … +70℃		
相对空气湿度	Environment humidity	<95%	<95%	不允许有凝露	Condensation prohibited
污染	Pollution	符合IEC 61800-5-1	IEC 61800-5-1	适用于污染等级2的环境	Pollution degree: level 2
电磁兼容性	Electromagnetic compatibility	符合IEC 61800-3	IEC 61800-3		

13.1.4 控制模块电气连接

13.1.4 Control module wiring

13.1.4.1 控制模块接线示意图

13.1.4.1 Control module wiring example

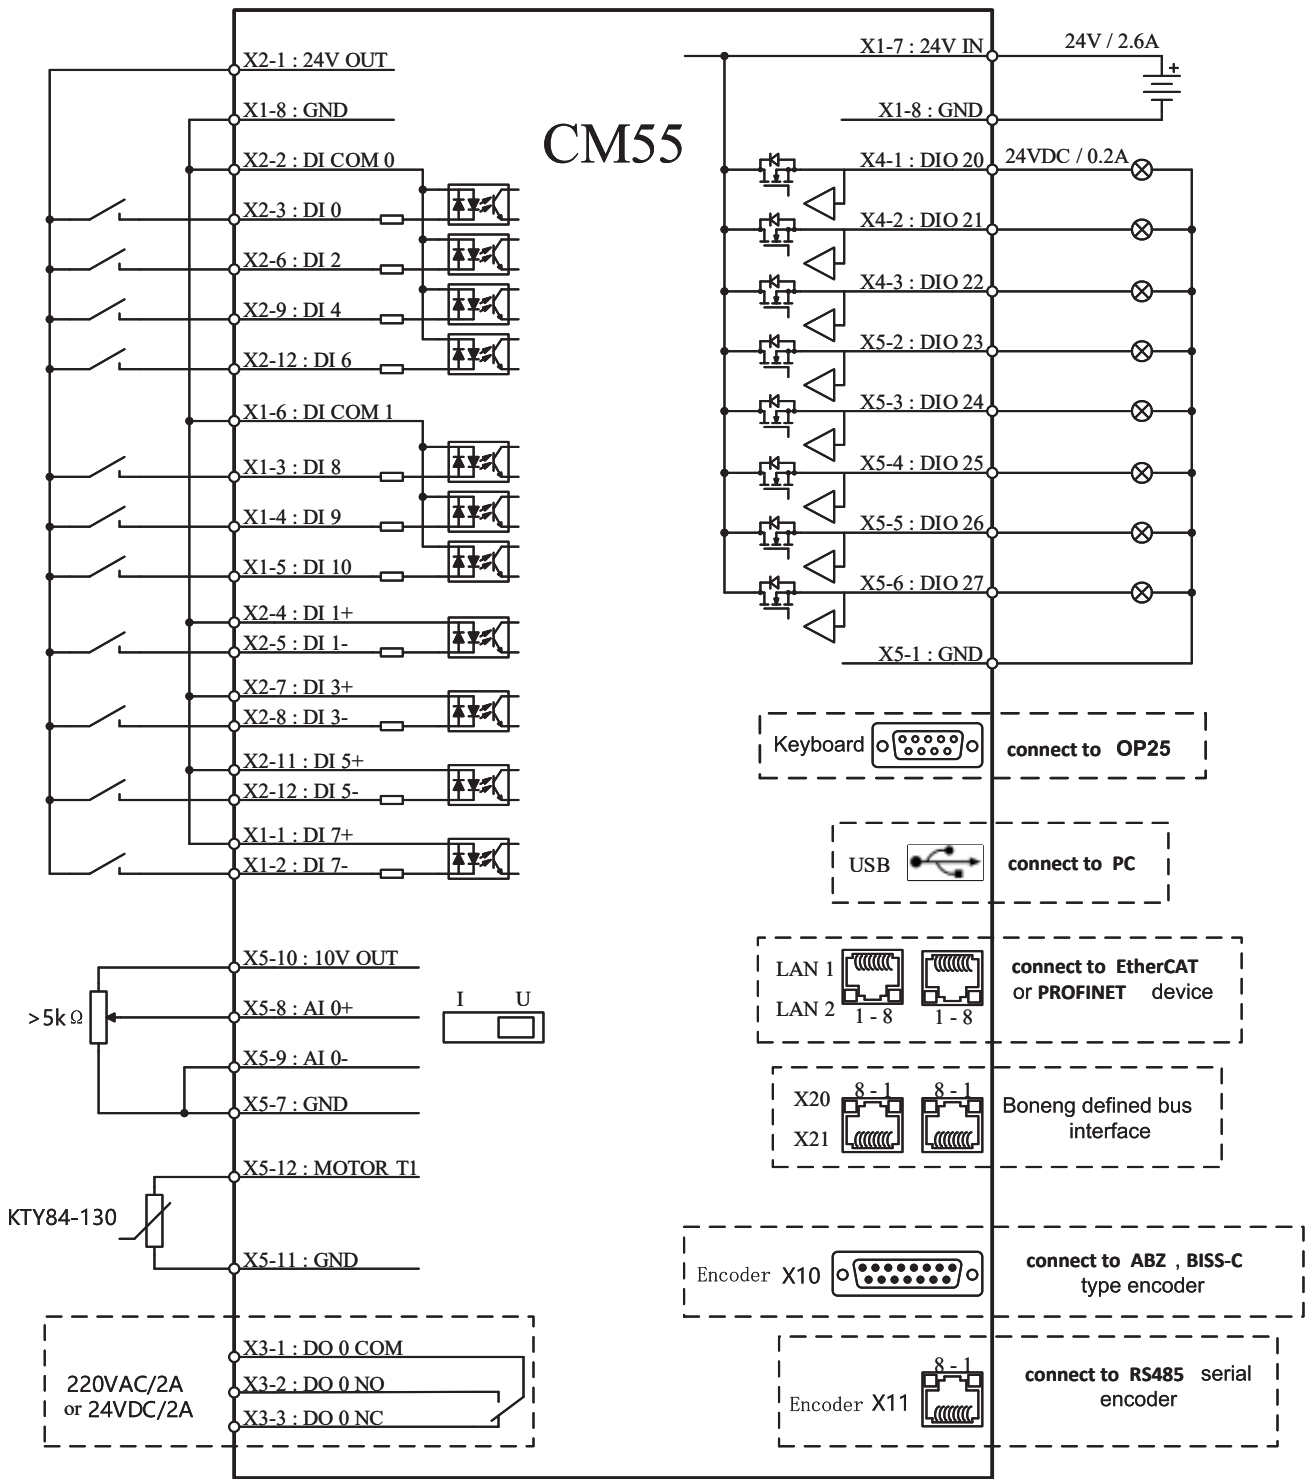

13.1.4.2 编码器接口信号定义

13.1.4.2 Encoder interface

a)编码器接口(X10)信号定义

a) Encoder interface(X10) signals

Pin.	信号说明	Signal description
1	BISS-C的数据+	BISS-C data+
2	BISS-C的时钟+	BISS-C clock+
3	BISS-C的时钟-	BISS-C clock-
4	编码器电源(5V或24V)	Encoder power supply(5V or 24V)
5	编码器电源(5V或24V)	Encoder power supply(5V or 24V)
6	编码器电源侦测输入	Encoder power detection input
7	电源地	Power ground
8	BISS-C的数据-	BISS-C data-
9	编码器电源侦测输入接地	Encoder power detection ground
10	增量式信号Z+	Incremental type Z+
11	增量式信号Z-	Incremental type Z-
12	增量式信号B-	Incremental type B-
13	增量式信号B+	Incremental type B+
14	增量式信号A-	Incremental type A-
15	增量式信号A+	Incremental type A+

b)编码器接口(X11)信号定义

b)Encoder interface(X11) signals

Pin.	信号说明	Signal description
1	KTY84-130或PTC输入	KTY84-130/PTC input
2	KTY84-130或PTC的接地	KTY84-130/PTC ground
3	BISS-C信号CK+	BISS-C signal CK+
4	RS485信号B或BISS-C信号DA-	RS485 signal B / BISS-C signal DA-
5	RS485信号A或BISS-C信号DA+	RS485 signal A / BISS-C signal DA+
6	BISS-C信号CK-	BISS-C signal CK-
7	编码器电源(5V)	Encoder power supply(5V)
8	编码器电源地	Power ground

14.2 控制模块CM53

14.2.1 概述

CM53模块是专为总线型伺服系统应用而设计的控制模块，支持PROFINET通讯，支持RT及IRT应用，除了标准的同步伺服电机为还支持异步伺服定位。



14.2.2 控制模块型号表示方法

博能精准系列伺服驱动器

控制模块

通讯协议

PA = PROFINET 和 DriveLink

编码器

PE=增量式/绝对值编码器

Boneng AX-series
precision servo drive

Control module

Communication protical

PA = PROFINET and DriveLink

Encoder Interface

PE=photoelectric incremental
/absolute encoder

14.2 Control module CM53

14.2.1 Information

The CM53 module is a control module designed specifically for bus type servo system applications, supporting PROFINET communication,supports RT and IRT applications,and in addition to standard synchronous servo motors,it also supports asynchronous servo positioning.

14.2.2 Designation rules and nameplate for control module

AX- CM53-PA- PE

订货号

Order number

型号	Model	接口类型描述	Interface type description
AX-CM53-PA-PE		支持PROFINET通讯, 增量/绝对式光电编码器	Support PROFINET, incremental / absoluteoptial encoder

14.2.3 技术参数

14.2.3 Technical date


功能	Functions	技术数据	Technical data		
总线接口	Bus interface	AX-CM53-PA-PE	AX-CM53-PA-PE	• 支持PROFINET、DriveLink • RJ45接口	• PROFINET, DriveLink bus • RJ45 interface
工作电源	Power supply	功率模块供电	By power module	• DC 24V/1.0A	• DC 24V/1.0A
		外部端子供电	By external terminals	• 电压范围: DC 20.8 ... 28.8V • 最大电流: 1.0A	• Voltage range: DC 20.8 ~28.8V • Maximum current: 1.0A
输出电源	Power output	+24V输出	+24V output	• 电压范围: DC 18V ... 26.8V • 最大电流: 100mA	• Voltage range: DC 18V ... 26.8V • Maximum current: 100mA
		+10V输出	+10V output	• 电压范围: DC 9.5V ... 10.5V • 最大电流: 10mA	• Voltage range: DC 9.5V ... 10.5V • Maximum current: 10mA
数字量输入	Digital input	6个	6	• DI0、DI1 ... DI5共公共端子M0 • 电气隔离 • 支持Source和Sink模式 • 电压: DC 24V、AC 36V • "1"信号电压: >11V • "0"信号电压: <5V • 24V典型电流: 4mA • 响应时间: 6ms (含软件滤波)	• Single inputs: DI0、DI1 ... DI5 share M0 • Electrical isolation • Support Source and Sink mode • Voltage: DC 24V, AC 36V • Level"1"voltage: >11V • Level"0"voltage: <5V • 24V typical current: 4mA • Response time: 6ms (Including software filter)
数字量输出	Digital output	1个继电器 (DO0)	1 relay (DO0)	• 电压: DC 24V、AC 220V • 连续电流: 2A • 切换电流: 2A • 触点类型: 1常开1常闭	• Voltage: DC 24V、AC 220V • Continuous current: 2A • Switching current: 2A • Contact type: 1 normally open and 1 close
脉冲输出	Pulse output	3个 (POA ~ POZ)	3 (POA ~ POZ)	• 电压: DC 5V • 电流: 最大20mA • 频率: 最大2MHz • 差分输出 • Z相支持开集电极输出	• Voltage: DC 5V • Current: Maximum 20mA • Frequency: Maximum 2MHz • Differential output • Z-phase supports open collector output
模拟量输入	Analog input	1个 (AI0)	1 (AI0)	• 电子开关切换电压和电流模式 • 电压型支持0V ... 10V • 电流型支持0mA ... 20mA, 4mA ... 20mA • 电流型内阻500Ω • 响应时间: 2ms (含软件滤波) • 精度: ±1%	• Electronic switch to choose voltage and current mode • Voltage range(voltage mode): 0V ~ 10V • Current range(current mode): 0mA ~ 20mA, 4mA ~ 20mA • Internal resistance in current mode: 500Ω • response time: 2ms (including software filter) • Precision: ±1%
温度传感器	Temperature sensor	1个	1	• 位于RJ45编码器端子X11 • 支持KTY84-130、PTC	• Respectively at the X11 • Support KTY84-130、PTC
编码器信号输入	Encoder interface	ABZ	ABZ	• 支持24V或5V的差分信号 • 输入频率: 最大250kHz • 最大长度: 100m • 断线检测功能	• 24V or 5V differential signal • Input frequency250kHz maximum • Maximum wire length: 100m • Disconnection detection
		SSI	SSI	• 支持5V的差分信号 • 波特率: 最大1Mbps	• 5V differential signal • Baud rate: 1Mbps maximum
		BISS-C	BISS-C	• 波特率: 最大2.5Mbps • RJ45接口 • 最大长度: 500kbps时 50m	• Baud rate: 2.5Mbps maximum • RJ45 interface • Maximum wire length:50m at 500kbps
		RS485	RS485	• 波特率: 最大2.5Mbps • 最大长度: 500kbps时 50m	• Baud rate: 2.5 Mbps maximum • Maximum wire length: 50m at 500kbps
USB接口	USB interface	1个	1	• USB 2.0 • Type-C	• USB 2.0 • Type-C
键盘显示	Keyboard display	支持	support	• 数码管和机械按键	• LED segment displays and mechanical buttons
工作温度	Ambient temperature	-20℃ ... +50℃	-20℃ ... +50℃		
存储温度	Storage temperature	-40℃ ... +70℃	-40℃ ... +70℃		
相对空气湿度	Environment humidity	<95%	<95%	不允许有凝露	Condensation prohibited
污染	Pollution	符合IEC 61800-5-1	IEC 61800-5-1	适用于污染等级2的环境	Pollution degree: level 2
电磁兼容性	Electromagnetic compatibility	符合IEC 61800-3	IEC 61800-3		
重量	Weight	大约635g	Approximately 635g		

13.2.4 控制模块电气连接

13.2.4 Control module wiring

13.2.4.1 控制模块接线示意图

13.2.4.1 Control module wiring example

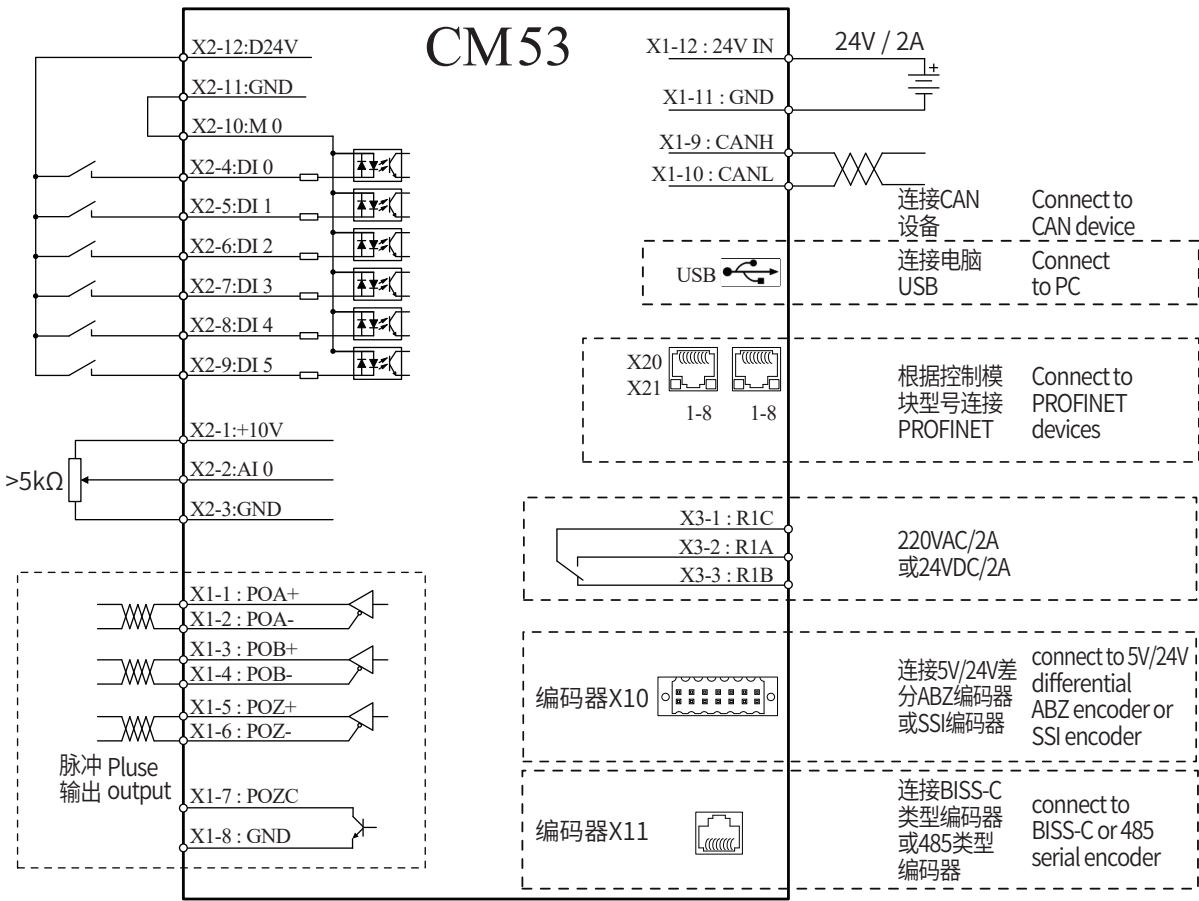

13.2.4.2 编码器接口信号定义：

13.2.4.2 Encoder interface

a) 编码器接口(X10)信号定义

a) Encoder interface (X10) signals

Pin.	信号说明	Signal description
1	增量式编码器信号A+	Incremental type A+
2	增量式编码器信号A-	Incremental type A-
3	增量式编码器信号B+	Incremental type B+
4	增量式编码器信号B-	Incremental type B-
5	增量式编码器信号Z+	Incremental type Z+
6	增量式编码器信号Z-	Incremental type Z-
7	编码器电源 (5V/0.2A)	Encoder power supply (5V/0.2A)
8	编码器电源地	Power ground
9	编码器电源 (24V/0.2A)	Encoder power supply (24V/0.2A)
10	编码器电源地	Power ground
11	SSI编码器信号CK+	SSI signal CK +
12	SSI编码器信号CK-	SSI signal CK -
13	SSI编码器信号DA+	SSI signal DA+
14	SSI编码器信号DA-	SSI signal DA-

b) 编码器接口(X11)信号定义

b) Encoder interface (X11) signals

Pin.	信号说明	Signal description
1	KTY84-130或PTC输入	KTY84-130 / PTC input
2	KTY84-130或PTC接地	KTY84-130 / PTC ground
3	BISS-C信号CK+	BISS-C signal CK+
4	RS485信号B或BISS-C信号DA-	RS485 signal B / BISS-C signal DA-
5	RS485信号A或BISS-C信号DA+	RS485 signal A / BISS-C signal DA+
6	BISS-C信号CK-	BISS-C signal CK-
7	编码器电源(5V)	Encoder power supply (5V)
8	编码器电源地	Power ground

14 驱动器功率模块

14 Power module

14.1 功率模块概述

14.1 General information

伺服驱动器功率模块AX-PM26的功率范围为0.75kW-132kW,可适配博能MX系列伺服马达,用户无需担心MX伺服马达和AX-PM26的选型匹配问题,只需要按样本前面章节中厂家推荐的默认选型匹配表进行匹配即可。AX-PM26伺服功率模块匹配AX-CM55伺服控制模块,构成了博能精准定位的伺服驱动器。

The power module AX-PM26 has a power range from 0.75 kW to 132 kW, can be adapted to the MX-series motor, which makes it easily for users to choose motor and AX-PM26(just select as what recommended in the default model matching table) without worrying about matching problems. The AX-PM26 can be matched to AX-CM55 to form a precisely positioned servo drive.

14.2 功率模块型号表示方法

14.2 Designation rules and nameplate for power module

博能精准系列伺服驱动器

Boneng AX-series precision servo drive

功率模块

Power module

电压等级

Voltage level

B=400V AC

B=400V AC

输入相数

Num.input phases

3=三相输入 3φ

3=Three-phases input 3φ

功率代号

Power id

内置滤波器代号

Built-in filter id

N=不带内置滤波器代号

N=Without built-in filter

F=带内置滤波器代号

F=With built-in filter

AX- PM26- B 3 - A75- N

功率模块订货数据


380~480V 3AC输入					380~480V 3AC input	
额定数据			Rated data		型号	Model
额定功率(kW)	Rated Power(kW)	额定电流(A)	额定电流(A)	Rated Current(A)	无内置滤波器 No built-in filter	
0.75			1.25		B1	AX-PM26-B3A75-N
1.5			2.42			AX-PM26-B3B15-N
2.2			3.43			AX-PM26-B3B22-N
3			4.51			AX-PM26-B3B30-N
4			5.93			AX-PM26-B3B40-N
5.5			7.69		B2	AX-PM26-B3B55-N
7.5			10.53			AX-PM26-B3B75-N
11			15.2			AX-PM26-B3C11-N
15			18.71		B3	AX-PM26-B3C15-N
18.5			38			AX-PM26-B3C18-N
22			45			AX-PM26-B3C22-N
30			60		B4	AX-PM26-B3C30-N
37			75			AX-PM26-B3C37-N
45			90			AX-PM26-B3C45-N
55			110		B6	AX-PM26-B3C55-N
75			145			AX-PM26-B3C75-N
90			178			AX-PM26-B3C90-N
110			190			AX-PM26-B3D11-N
132			202			AX-PM26-B3D13-N

注:带内置滤波器的功率模块PM26无现货库存，如需要，请咨询厂家。

Power module order number

Note: PM26 with built-in filter is out of stock, contact us if need.

14.3 功率模块电气连接

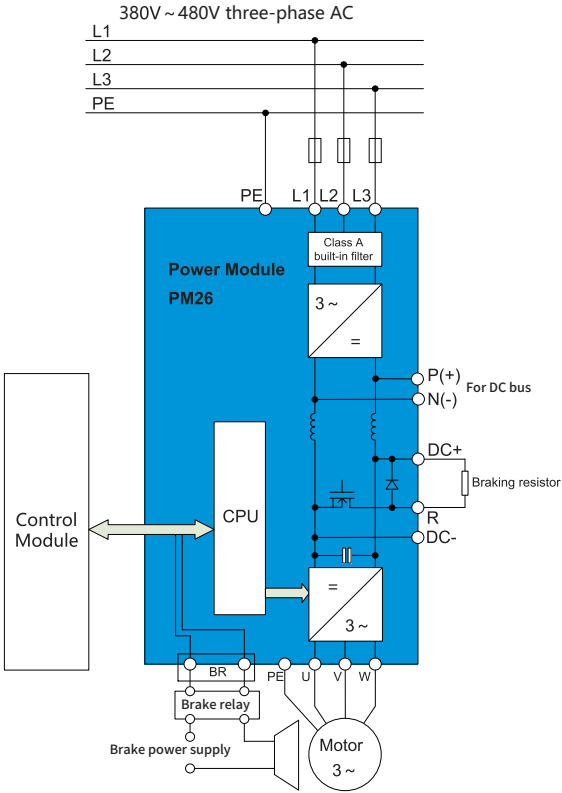

注：PM26的BR接口仅在配合控制模块CM55时可用，配合控制模块CM53时不可用，可以接端子上的继电器来控制抱闸。

14.3 Power module wiring

Note: The BR interface of PM26 is only available when working with control module CM55, but not when working with control module CM53. It can be connected to a relay on the terminal to control the holding brake.

14.4 功率模块通用技术参数

14.4 General technical date for power module

PM26功率模块（通用参数）		PM26 power module(general parameters)	
输入电压	Voltage input	380~480V 3AC ±10%	380~480V 3AC ±10%
输入频率	Input frequency	47~63Hz	47~63Hz
默认载波频率	Default carrier frequency	变频模式：90kW及以下4kHz,110kW及以上2kHz	Frequency conversion mode: 4 kHz for 90 kW and below; 2 kHz for 110 kW and above.
		伺服模式：15kW及以下8kHz, 18.5kW及以上为4kHz	Servo mode:8kHz for 15kW and below; 4kHz for 18.5kW and above.
功率因数	Power factor	0.95	0.95
驱动器效率	Drive efficiency	95~97%	95~97%
过载能力	Overload capacity	在30s周期性冲击负载下，可实现3倍3s的过载能力	Under 30s periodic impact load,can withstand 3 times the overload for 3s.
电磁兼容	Electromagnetic compatibility	可选符合EN 55011标准的A级滤波器和B级滤波器	Optional A-level and B-level filters complying with EN 55011.
可选制动方式	Optional braking method	●DC制动	●DC brake
		●外挂制动单元	●External brake unit
		●内置制动斩波器，需外接制动电阻	●Built-in braking chopper, external resistor is required.
防护等级	Protection level	IP20	IP20
工作温度	Use ambient temperature	-20...+40℃无需降额; +40℃...+50℃每升高1℃降额1.5%; +50℃...+60℃每升高1℃降额5%	-20~+40C: no derating; +40C~+50C: decrease by 1.5% for every 1C increase; +50C~+60C: decrease by 5% for every 1C increase.
存储温度	Storage temperature	-40...+70℃	-40...+70℃
相对湿度	Relative humidity	< 95% RH，无结露	<95% RH,no condensation
冷却方式	Cooling method	内部风冷	功率部分采用内置风扇强制风冷
安装海拔高度	Installation altitude	海拔1000m以下无需降额; 1000m...4000m每升高100m降额1%	Built-in fan for forced air cooling.
标准SCCR	Standard SCCR	小于100kA	No derating within 1000m: 1000m_4000m: decrease by 1% for every 100m rise i n altitude
保护功能	Protective function	●欠电压	●Under voltage
		●过电压	●Over voltage
		●过载	●Overload
		●接地故障	●Ground fault
		●短路	●Short-circuit
		●马达抱闸保护	●Motor braking protection
		●马达过温	●Motor over temperature
		●输出缺相	●Output phase loss
		●变频器过温	●Inyerter over temperature

14.5 功率模块详细技术参数

14.5 Detailed technical parameters


进线电压380…480V 3AC				Incoming line voltage 380…480V 3AC						
技术参数		Technical data		AX-PM26-B3A75	AX-PM26-B3B15	AX-PM26-B3B22	AX-PM26-B3B30	AX-PM26-B3B40	AX-PM26-B3B55	AX-PM26-B3B75
额定输出功率 kW		Rated output power kW		0.75	1.5	2.2	3	4	5.5	7.5
额定输入电流	Rated output current	带进线电抗器A	With incoming line reactorA	2.3	4.3	6.1	8	10.4	15.3	18.7
		不带进线电抗器A	Without incoming line reactorA	2.6	4.9	7.6	10.2	13.4	17.2	21.9
额定输出电流 A		Rated outputcurrent A		1.25	2.42	3.43	4.51	5.93	7.69	10.53
效率η		Efficiencyη		> 0.95						
功率损失kW		Power loss kW		0.1	0.11	0.14	0.16	0.18	0.24	0.3
冷却风量要求 m³/s		Cooling air requirement m³/s		0.005			0.024		0.055	
噪声水平 dB(A)		Noise level dB(A)		< 40				< 50		
控制单元接口		Interface with control unit		1						
制动电阻连接电缆的最大长度m		Maxi mumcable length ofbrakingresistor m		15						
进线电源连接	Power supply wiring	L1、L2、L3		螺钉端子 Screw terminal						
		电缆截面积mm²	Cable sectional Aera mm²	1…2.5				2.5…6		
马达连接	Motor wiring	U、V、W		螺钉端子 Screw terminal						
		电缆截面积mm²	Cable sectional Aera mm²	1…2.5				2.5…6		
直流母线连接（制动电阻的连接）	DC bus connection (connection of braking resistor)	DC+、DC-、R		螺钉端子 Screw terminal						
		电缆截面积mm²	Cable sectional Aera mm²	1…2.5				2.5…6		
PE连接		PE connection		外壳上的M4螺钉 M4 screws on the housing						
最大马达电缆长度	Maximum motor cable length	屏蔽电缆 m	Shielded cable m	50						
		非屏蔽电缆 m	Unshielded cable m	100						
防护等级		Protection level		IP20						
外形尺寸		Dimensions		B1				B2		
大约重量 kg		Weight kg		1.7				2.8		

AX-PM26-B3C11	AX-PM26-B3C15	AX-PM26-B3C18	AX-PM26-B3C22	AX-PM26-B3C30	AX-PM26-B3C37	AX-PM26-B3C45	AX-PM26-B3C55	AX-PM26-B3C75	AX-PM26-B3C90	AX-PM26-B3D11	AX-PM26-B3D13
11	15	18.5	22	30	37	45	55	75	90	110	132
26	33	39	46	63	78	86	104	140	172	198	242
32	39	46	53	73	88	78	94	117	154	189	218
15.2	18.71	38	45	60	75	90	110	145	178	190	202
> 0.95											
0.4		0.5	0.7	1	1.3		1.67	1.93	2.48	2.3	3.02
0.055				2x0.055		0.083		0.153			
< 40				< 50		< 75					
1											
15											
螺钉端子Screw terminal						电缆终端Cable termination					
4…10		6…25				35…2x120					
螺钉端子Screw terminal						电缆终端Cable termination					
4…10		6…25				35…2x120					
螺钉端子Screw terminal											
4…10		6…25				25…70					
外壳上的M4螺钉 M4 screws on the housing		外壳上的M5螺钉 M5 screws on the housing				电缆终端Cable termination					
50											
100											
IP20											
B3		B4				B6					
7		16				65					

15 驱动器操作面板

15.1操作面板概述

操作面板OP25为驱动器调试提供更加灵活的调试诊断方式，AX系列伺服驱动器可以通过PC及上位机进行调试，也可以使用OP25进行快捷调试。

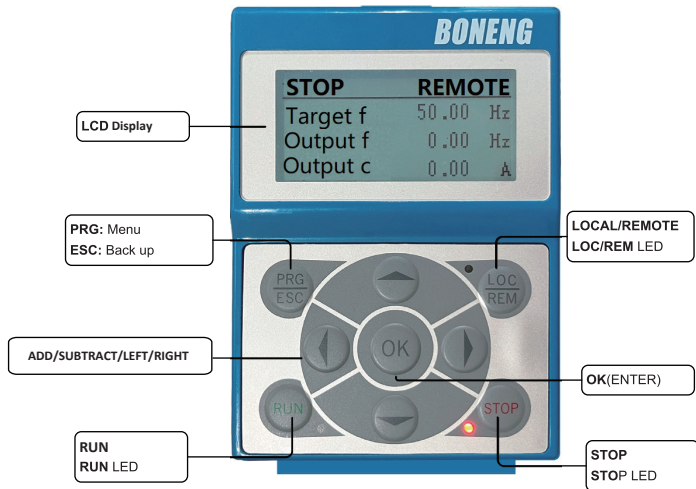

操作面板订货型号为：
A1-OP25

注：A1-OP25和AX-CM53-PN-PE 匹配时，需要通过专用转接线来连接，请直接订购AD-OP25即可，既包含了操作键盘也包含了转接线。

15 Operation panel

15.1General information

The AX-series drive can be debugged with either PC-Software (BonengDrivesoft) or Operation Panel(OP25). The operation Panel (OP25) can make drive debugging and diagnosis easier and more flexible.

The Operation Panel order number is: A1-OP25

Note：When A1-OP25 and AX-CM53-PN-PE are matched, they need to be connected through a dedicated adapter cable. Please order AD-OP25 directly, which includes both the operation keyboard and the adapter cable.

16 驱动器可选件

16.1 制动电阻

制动电阻用于使大转动惯量的负载迅速制动。在马达和负载制动时，动能转换成的再生电能会返回到驱动器中，直流母线电压因此抬高，驱动器将这些再生的能量几乎全部消耗在制动电阻上；400V 50/60Hz AX精准系列伺服驱动器可选的制动电阻推荐规格如下：

16 Options

16.1 Braking Resistor

The braking resister is used to quickly brake the load with large moment of inertia. When the load and motor brake, the regenerative energy converted from kinetic energy will be returned to the driver, and then the DC bus voltage will be raised. The braking resistor is installed to consume almost all of this part of energy to keep the DC bus voltage level. The recommended model of optional Braking Resistor for 400V-50/60 Hz AX-series servo drives are as follows:

驱动器			允许的最小 制动电阻	推荐值		博能型号	
框架	无内置滤波器型号	有内置滤波器型号		功率(W)	阻值(Ω)	订货号	等效制动电阻
Power module			Minimum allowable resistance value for the brake resistor	Recommend value		BONENG Type	
Frame size	Article number without filter	Article number with filter		Power (W)	Resistance (Ω)	Article number	Equivalent brake resistor
B1	AX-PM26-B3A75-N	AX-PM26-B3A75-F	374Ω	60	750	A1-H02-A06-K-D75	60W 750Ω
	AX-PM26-B3B15-N	AX-PM26-B3B15-F	374Ω	80	390	A1-H02-A08-K-D39	80W 390Ω
	AX-PM26-B3B22-N	AX-PM26-B3B22-F	140Ω	150	180	A1-H02-A15-K-D18	150W 180Ω
	AX-PM26-B3B30-N	AX-PM26-B3B30-F	140Ω	150	180	A1-H02-A15-K-D18	150W 180Ω
B2	AX-PM26-B3B40-N	AX-PM26-B3B40-F	75Ω	300	100	A1-H02-A30-K-D10	300W 100Ω
	AX-PM26-B3B55-N	AX-PM26-B3B55-F	75Ω	300	100	A1-H02-A30-K-D10	300W 100Ω
	AX-PM26-B3B75-N	AX-PM26-B3B75-F	75Ω	400	75	A1-H02-A40-K-C75	400W 75Ω
B3	AX-PM26-B3C11-N	AX-PM26-B3C11-F	30Ω	800	36	A1-H02-A80-K-C36	800W 36Ω
	AX-PM26-B3C15-N	AX-PM26-B3C15-F	30Ω	800	36	A1-H02-A80-K-C36	800W 36Ω
B4	AX-PM26-B3C18-N	AX-PM26-B3C18-F	27Ω	1000	27	A1-H02-B10-K-C27	1000W 27Ω
	AX-PM26-B3C22-N	AX-PM26-B3C22-F	27Ω	1000	27	A1-H02-B10-K-C27	1000W 27Ω
	AX-PM26-B3C30-N	AX-PM26-B3C30-F	15Ω	2000	15	A1-H02-B20-K-C15	2000W 15Ω
	AX-PM26-B3C37-N	AX-PM26-B3C37-F	15Ω	2000	15	A1-H02-B20-K-C15	2000W 15Ω
B6	AX-PM26-B3C45-N	AX-PM26-B3C45-F	10Ω	3000	10	A1-H02-B30-K-C10	3000W 10Ω
	AX-PM26-B3C55-N	AX-PM26-B3C55-F	10Ω	3000	10	A1-H02-B30-K-C10	3000W 10Ω
	AX-PM26-B3C75-N	AX-PM26-B3C75-F	7.1Ω	4000	7.5	A1-H02-B40-K-B75	4000W 7.5Ω
	AX-PM26-B3C90-N	AX-PM26-B3C90-F	7.1Ω	4000	7.5	A1-H02-B40-K-B75	4000W 7.5Ω
	AX-PM26-B3D11-N	AX-PM26-B3D11-F	5Ω	6000	5	A1-H02-B60-K-B50	6000W 5Ω
	AX-PM26-B3D13-N	AX-PM26-B3D13-F	5Ω	6000	5	A1-H02-B60-K-B50	6000W 5Ω

16.2 进线电抗器

当系统的故障率高时，需要加装进线电抗器以保护驱动器不受过大的谐波电流的干扰，改善驱动器的输入侧功率因数；防止过载，并将进线谐波限制在允许的值内，以确保驱动器达到期望的使用寿命。400V 50/60Hz AX精准系列伺服驱动器可选的进线电抗器推荐型号如下表：

16.2 Incoming line reactors

A incoming line reactor is required and needful to prevent the drive from being disturbed by excessive harmonic currents, and improve the Input side power factor, when the system has a high failure rate. In addition, the incoming line reactor can limit the line harmonics to allowable values to ensure the drive's expected service life, when the overload occurs. The recommended model of optional incoming line reactors for 400V-50/60 Hz AX-series servo drives are listed below:

驱动器		Drives		进线电抗器 推荐参数		Recommended parameters of reactors		订货 号	Order number
框架	Dimension types	无内置 滤波器 型号	Without built-in filter	额定 电流 (A)	Rated current (A)	电感 (mH)	Rated inductance (A)		
B1		AX-PM26-B3A75-N		2.6		5.9		A1-H12-TB280	
		AX-PM26-B3B15-N		4.9		3.1		A1-H12-TB280	
		AX-PM26-B3B22-N		7.1		2.2		A1-H12-TB200	
		AX-PM26-B3B30-N		9.2		1.7		A1-H12-TB140	
B2		AX-PM26-B3B40-N		12.2		1.3		A1-H12-TA930	
		AX-PM26-B3B55-N		15.8		1		A1-H12-TA700	
		AX-PM26-B3B75-N		21.6		0.8		A1-H12-TA700	
B3		AX-PM26-B3C11-N		31.2		0.5		A1-H12-TA470	
		AX-PM26-B3C15-N		38.4		0.4		A1-H12-TA350	
B4		AX-PM26-B3C18-N		45.6		0.5		A1-H12-TA280	
		AX-PM26-B3C22-N		54		0.4		A1-H12-TA240	
		AX-PM26-B3C30-N		72		0.3		A1-H12-TA160	
		AX-PM26-B3C37-N		90		0.2		A1-H12-TA160	
B6		AX-PM26-B3C45-N		120		0.117		A1-H12-TB120	
		AX-PM26-B3C55-N		150		0.094		A1-H12-TA095	
		AX-PM26-B3C75-N		200		0.07		A1-H12-TA070	
		AX-PM26-B3C90-N		250		0.056		A1-H12-TA056	
		AX-PM26-B3D11-N		250		0.056		A1-H12-TA056	
		AX-PM26-B3D13-N		290		0.048		A1-H12-TA048	

16.3 进线滤波器

进线滤波器的作用是抑制驱动器通过输入电源线所传输到公共电网中的电磁干扰,同时也衰减从电源线进入驱动器的干扰；在安装时请尽量靠近驱动器的输入端子侧进行安装，请使用驱动器专用的进线滤波器。400V 50/60Hz AX精准系列伺服驱动器可选的进线滤波器推荐型号如下表：

16.3 Incoming filter

The function of the incoming line filter is to suppress the electromagnetic interference transmitted from/to the drive to/from the public power supply network through the power supply line. When use it, please choose recommended drive specific line filter, and install it as close to the input end of the drive as possible. The recommended types of incoming line filter for 400V-50/60 Hz AX-series servo drives are as follows:

驱动器		Drives		EMC 滤波器	EMC filter	订货号	Order number
框架	Dimension types	无内置 滤波器 型号	Without built-in filter	额定 电流 (A)	Rated current (A)		
B1		AX-PM26-B3A75-N		2.9		A1-H11-A-C10	
		AX-PM26-B3B15-N		5.5		A1-H11-A-C10	
		AX-PM26-B3B22-N		7.7		A1-H11-A-C10	
		AX-PM26-B3B30-N		10.1		A1-H11-A-C10	
B2		AX-PM26-B3B40-N		13.3		A1-H11-A-C20	
		AX-PM26-B3B55-N		17.2		A1-H11-A-C20	
		AX-PM26-B3B75-N		22.2		A1-H11-A-C30	
B3		AX-PM26-B3C11-N		32.6		A1-H11-A-C36	
		AX-PM26-B3C15-N		39.9		A1-H11-A-C50	
B4		AX-PM26-B3C18-N		36		A1-H11-A-C50	
		AX-PM26-B3C22-N		42		A1-H11-A-C50	
		AX-PM26-B3C30-N		57		A1-H11-A-C65	
		AX-PM26-B3C37-N		70		A1-H11-A-C80	
B6		AX-PM26-B3C45-N		100		A1-H11-A-D10	
		AX-PM26-B3C55-N		130		A1-H11-A-D13	
		AX-PM26-B3C75-N		150		A1-H11-A-D15	
		AX-PM26-B3C90-N		180		A1-H11-A-D18	
		AX-PM26-B3D11-N		200		A1-H11-A-D20	
		AX-PM26-B3D13-N		250		A1-H11-A-D25	

16.4 出线电抗器

当驱动器和马达之间的距离超过50米时，由于长电缆对地的寄生电容效应导致漏电流过大，驱动器容易频繁发生过流保护，同时为了避免马达绝缘损坏，须加输出电抗器补偿，输出电抗器可以减小马达绕组上的电压负载，以及采用长的马达电缆时，容性充放电电流加在功率部分的附加负载。400V 50/60Hz AX精准系列伺服驱动器可选的输出电抗器推荐型号如下表：

16.4 Outlet reactor

When the motor is more than 50m away from the drive, due to the parasitic capacitance effect of the long cable to the ground, the leakage current will become too large to trigger the over-current fault to protect the drive. To avoid this case and prevent motors from being damaged, a outlet reactor can be used. Because the outlet reactor can reduce the voltage applied to the motor windings and the additional load that capacitive charge/discharge current added to the power module when long cable used. The recommended model of optional Outlet Reactor for 400V-50/60 Hz AX-series servo drives are as follows:

驱动器		Drives		进线电抗器 推荐参数		Recommended parameters of reactors	订货 号	Order number
框架	Dimension types	无内置 滤波器 型号	Without built-in filter	额定 电流 (A)	Rated current (A)	电感 (mH)		
B1		AX-PM26-B3A75-N		2.6		3.2	A1-H13-TB140	
		AX-PM26-B3B15-N		4.9		1.7	A1-H13-TB140	
		AX-PM26-B3B22-N		7.1		1.2	A1-H13-TB100	
		AX-PM26-B3B30-N		9.2		0.9	A1-H13-TA700	
B2		AX-PM26-B3B40-N		12.2		0.7	A1-H13-TA470	
		AX-PM26-B3B55-N		15.8		0.5	A1-H13-TA350	
		AX-PM26-B3B75-N		21.6		0.4	A1-H13-TA230	
B3		AX-PM26-B3C11-N		31.2		0.3	A1-H13-TA180	
		AX-PM26-B3C15-N		38.4		0.2	A1-H13-TA180	
B4		AX-PM26-B3C18-N		45.6		0.2	A1-H13-TA140	
		AX-PM26-B3C22-N		54		0.2	A1-H13-TA120	
		AX-PM26-B3C30-N		72		0.1	A1-H13-TA087	
		AX-PM26-B3C37-N		90		0.1	A1-H13-TA078	
B6		AX-PM26-B3C45-N		120		0.058	A1-H13-TA058	
		AX-PM26-B3C55-N		150		0.047	A1-H13-TA047	
		AX-PM26-B3C75-N		200		0.035	A1-H13-TA035	
		AX-PM26-B3C90-N		250		0.028	A1-H13-TA028	
		AX-PM26-B3D11-N		250		0.028	A1-H13-TA028	
		AX-PM26-B3D13-N		290		0.024	A1-H13-TA024	




X7030 X7050
系列控制器
EtherCAT&Modbus



X3050 运动控制器
Motion Controller
EtherCAT&Modbus
24VDC

C/F/K/S-M
* . . . D
马达分布式
变频驱动器
Integrated
Gearmotor
Drive

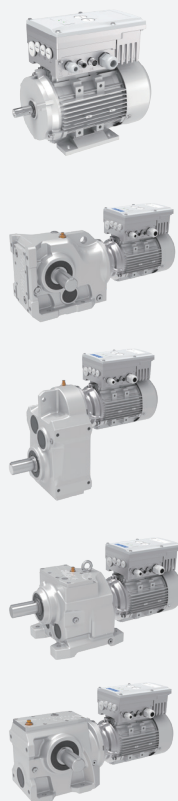


EtherCAT&
Modbus
380~480VAC
0.25~3kW
i=4~355

AM 变频驱动器
Variable Frequency Drive



Modbus
380~480VAC
0.75~5.5kW

A1 变频驱动器
Variable Frequency Drive



Modbus/CANopen
/PROFINET
380~480VAC
0.75~250kW

C/F/K/S/R
齿轮马达
Gearmotor



380~480VAC
0.09~200kW
i=1.25~500

MP/MU
三相交流异步马达
Asynchronous Motor




380~480VAC
0.09~90kW
960/1450r/min
1160/1750r/min

HB/BE/HK
齿轮箱
Gearbox




4.2~15775kW
i=5.6~450

P/PK
行星齿轮箱
Planetary
Gearbox



0.4~14000kW
i=25~4000

PW
卷扬齿轮箱
Planetary
Winch
Gearbox



1~1810kW
i=13~940

PS
回转齿轮箱
Planetary
Slewing
Gearbox




1~1626kW
i=14~947

J/JB
升降机
Jack



0.35~22.63kW
i=5~34

T
转向箱
Spiral Bevel
Gearbox



0.08~303kW
i=1:1~3:1

MX&AX
伺服马达&伺
服驱动器
Permanent
Magnet
Servo Motor
& Servo Drive



EtherCAT/
PROFINET
380~480VAC
0.28~14kW
1500/2000r/min
3000/4500r/min



C/F/K-MX
&AX齿轮伺
服马达&伺
服驱动器
Servo
Gearmotor
& Servo Drive



PX-MX&AX
行星伺服马达
&伺服驱动器
Planetary
Precision Gear
Servo Motor
& Servo Drive



EtherCAT/
PROFINET
380~480VAC
0.38~14kW
i=3~100

PN-MN&AN
行星伺服马达
&伺服驱动器
Planetary
Precision Gear
Servo Motor
& Servo Drive



EtherCAT
PROFINET
380~480VAC
0.28~5.03kW
i=3~100

ME&AN
永磁同步伺服马
达&伺服驱动器
Permanent
Magnet
Servo Motor
& Servo Drive



EtherCAT/
PROFINET
200~240VAC
0.1kW~1.2kW

博能传动(沈阳)有限公司	BONENG TRANSMISSION(SHENYANG)CO.,LTD.
辽宁省沈阳市沈北新区 太平洋工业城A区A73-6号 电话：024-31271571	No. A73-6, Area A, Pacific Industrial City, Shenbei New District, Shenyang, Liaoning Province, China TEL: 024-31271571

博能传动(天津)有限公司	BONENG TRANSMISSION(TIANJIN)CO.,LTD.
天津市北辰区双海道6号 宏鹏工业园7号车间 电话：022-26929556	7th Workshop, Hongpeng Industrial Park, No. 6 Shuanghai Road, Beichen District, Tianjin City,China TEL: 022-26929556

博能传动(潍坊)有限公司	BONENG TRANSMISSION(WEIFANG)CO.,LTD.
山东省潍坊市安丘市经济开发区 汶水路与昆仑大街交叉口往北 100米路东1号车间 电话：0536-2141166	1st Workshop, Economic Development Zone, Anqiu, Weifang City, Shandong Province, China TEL: 0536-2141166

博能传动(开封)有限公司	BONENG TRANSMISSION(KAIFENG)CO.,LTD.
河南省开封市宋城路四大街11号 海神机械院内五号厂房 电话：0371-23335238	5th Workshop, Haishen Machinery, No.11, Fourth Street, Songcheng Road,New District, Kaifeng City, Henan Province, China TEL: 0371-23335238

博能传动(长沙)有限公司	BONENG TRANSMISSION(CHANGSHA)CO.,LTD.
湖南省长沙市望城经济开发区 普瑞大道1288号 电话：0731-88386958	No. 1288 Puri Avenue, Wangcheng Economic Development Zone, Changsha City, Hunan Province, China TEL: 0731-88386958

博能传动设备(成都)有限公司	BONENG TRANSMISSION EQUIPMENT(CHENGDU) CO., LTD.
四川省成都市金牛区金牛坝路9号5栋 向荣中心A座7楼5号 电话：028-87741100	No. 5, 7th Floor, Block A, Xiangrong Center, Building 5, No. 9 Jinniuba Road, Jinniu District, Chengdu City, Sichuan Province, China TEL: 028-87741100

博能传动(肇庆)有限公司	BONENG TRANSMISSION(ZHAOQING)CO.,LTD.
广东省肇庆市鼎湖区肇庆新区 科创大道7号平谦国际现代产业园 一期A12北厂房 电话：0757-86719757	No. 7 Science and Technology Innovation Avenue, Zhaoqing New Area, Dinghu District, Zhaoqing City, Guangdong Province, China TEL: 0757-86719757

博能传动(苏州)有限公司	BONENG TRANSMISSION(SUZHOU)CO.,LTD.
江苏省苏州市相城区如元路100号 电话：0512-66189662	No. 100, Ruyuan Road, Xiangcheng District, Suzhou, Jiangsu Province, China TEL: 0512-66189662

博能传动(美国)有限公司	BONENG TRANSMISSION(USA)LLC.
1250 E 222nd Euclid, OH 44117, United Staes TEL: 1-216-618-0138 TEL: 1-216-618-0496 TEL: 1-216-618-3099	1250 E 222nd Euclid, OH 44117, United Staes TEL: 1-216-618-0138 TEL: 1-216-618-0496 TEL: 1-216-618-3099

博能传动(印度)有限公司	BONENG TRANSMISSION(INDIA)PVT.LTD
Plot No. E-10/3, MIDC sinner (Malegaon) Industrial Area, Nashik, 422123, Maharashtra, India. TEL:+91-11- 4507 6293 (DELHI) TEL:+91-22-2781 3385 (MUMBAI)	Plot No. E-10/3, MIDC sinner (Malegaon) Industrial Area, Nashik, 422123, Maharashtra, India. TEL:+91-11- 4507 6293 (DELHI) TEL:+91-22-2781 3385 (MUMBAI)